


D 101.11:
43-0001-38/986

TM 43-0001-38

TECHNICAL MANUAL

**ARMY AMMUNITION
DATA SHEETS
FOR
DEMOLITION
MATERIALS**




This copy is a reprint which includes current
pages from Changes 1 and 2.

HEADQUARTERS, DEPARTMENT OF THE ARMY



JUNE 1981

89-369-P



Change)
No. 2 }

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 31 December

TECHNICAL MANUAL
ARMY AMMUNITION DATA SHEETS
FOR
DEMOLITION MATERIALS

TM 43-0001-38, 25 June 1981, is changed as follows:

1. Remove old pages and insert new pages as indicated below. New or changed material is indicated by a vertical bar in the margin of the page. Added or re-illustrations are indicated by a vertical bar adjacent to the identification number.

<u>Remove pages</u>	<u>Insert pages</u>	<u>Remove pages</u>	<u>Insert pages</u>
A	A	4-3 and 4-4	4-3 and 4-4
i and ii	i thru iii (iv blank)	None	4-20.1 thru 4-20.2
2-13 and 2-14	2-13 and 2-14	None	4-35 thru 4-40
2-25 thru 2-28	2-25 thru 2-28	5-29 and 5-30	5-29 and 5-30
None	2-38.1 thru 2-38.4	6-3 thru 6-6	6-3 thru 6-6
2-39 thru 2-42	2-39 thru 2-41 (2-42 blank)	6-11 and 6-12	6-11 and 6-12

2. File this change in front of the publication for reference purposes.

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-34B-R, Requirements for Army Ammunition Data Sheets, Demolition Materials.

Change)
)
No. 1)

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 30 April 1984

TECHNICAL MANUAL
ARMY AMMUNITION DATA SHEETS
FOR
DEMOLITION MATERIALS

TM 43-0001-38, 25 June 1981, is changed as follows:

1. Remove old pages and insert new pages as indicated below. New or changed material is indicated by a vertical bar in the margin of the page. Added or revised illustrations are indicated by a vertical bar adjacent to the identification number.

Remove pages

None
i and ii
None

Insert pages

A/(B blank)
i and ii
4-33 (4-34 blank)

2. File this change in front of the publication for reference purposes.

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

ROBERT M. JOYCE
Major General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-40, Organizational Maintenance requirements for Demolition Materials.

When applicable, insert latest change pages and dispose of superseded pages in accordance with applicable regulations.

LIST OF EFFECTIVE PAGES

Total number of pages in this publication is 194 consisting of the following:

Page No.	*Change No.	Page No.	*Change No.
Cover	0	4-3 and 4-4	2
Inside cover	0	4-5 thru 4-20	0
A	2	4-20.1 thru 4-20.4	2
i thru iii	2	4-21 thru 4-32	0
iv blank	2	4-33 and 4-34	1
1-1 and 1-2	0	4-35 thru 4-44	2
2-1 thru 2-12	0	5-1 thru 5-27	0
2-13	2	5-28 blank	0
2-14	0	5-29	0
2-15 thru 2-23	0	5-30	2
2-24 blank	0	5-31 and 5-32	0
2-25	2	6-1 and 6-2	0
2-26	0	6-3	0
2-27	2	6-4	2
2-28	0	6-5	0
2-29 thru 2-38	0	6-6	2
2-38.1 thru 2-38.4	2	6-7 thru 6-9	0
2-39 thru 2-41	2	6-10 blank	0
2-42 blank	0	6-11	0
2-43 thru 2-62	0	6-12	2
3-1 thru 3-24	0	6-13	0
4-1 and 4-2	0	6-14 blank	0
		Authentication page	0

*Zero indicates an original page.

TECHNICAL MANUAL)
 No. 43-0001-38

HEADQUARTERS
 DEPARTMENT OF THE ARMY
 WASHINGTON, DC, 25 June 1961

ARMY AMMUNITION DATA SHEETS
 FOR
 DEMOLITION MATERIALS

REPORTING OF ERRORS

You can help improve this manual. If you find any mistakes or know of a way to improve the procedures, please let us know. Mail your DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in the back of this manual direct to: Commander, US Army Armament, Munitions and Chemical Command, ATTN: AMSMC-MAY-T (D), Dover, New Jersey 07801-5001. A reply will be furnished to you.

	Paragraph	Page
CHAPTER 1. INTRODUCTION		
Purpose -----	1-1	1-1
Scope -----	1-2	1-1
Metric conversion chart -----	1-3	1-1
Quantity-distance classes and storage compatibility groups -----	1-4	1-1
CHAPTER 2. INITIATING AND PRIMING DEVICES		
Cap, Blasting, Electric: M6 -----		2-3
Cap, Blasting: Nonelectric, M7 -----		2-5
Cap, Blasting: Special, Nonelectric, J-1 (Type 1) -----		2-7
Cap, Blasting, Electric, Special, J-2, Type II -----		2-9
Detonator, Percussion: M1A2, 15-second Delay -----		2-11
Detonator, Friction: 15 Sec Delay M1 or M1A1 -----		2-13
Detonator Friction 8-Second Delay M2 -----		2-15
Detonator, Percussion: M2A1, 8-Second Delay -----		2-17
Detonator Kit, Concussion: M1 -----		2-19
Cord, Detonating -----		2-21
Cord, Detonating: Inert-Reinforced, Dummy -----		2-23
Coupling Base, Firing Device -----		2-25
Coupling Base, Firing Device: Non-Metallic M2 -----		2-27
Coupling Body -----		2-29
Firing Device, Demolition: M1, Release Type -----		2-31
Firing Device, Demolition: M1, Delay -----		2-33
Firing Device, Demolition: M1, Pull Type -----		2-35
Firing Device, Demolition: M5, Pressure Release -----		2-37
Firing Device, Demolition: M122 -----		2-39
Firing Device, Demolition: M142, Multipurpose (Pressure, Pull, Pressure Release, or Tension Release Type)-----		2-41

Firing Device, Demolition: M3, Pull Release Type -----	2-43
Firing Device, Demolition: M1 and M1A1, Pressure Type -----	2-45
Primer, Percussion: Cap, M2 -----	2-47
Primer, Percussion: Cap, M27 -----	2-49
Fuse, Blasting, Time: (Safety Fuse) -----	2-51
Fuse, Blasting: Time, M700 -----	2-53
Fuse, Blasting Time, Inert -----	2-55
Igniter, Time Blasting Fuse: M1, Friction -----	2-57
Igniter, Time Blasting Fuse: M2, Weatherproof -----	2-59
Igniter, Time Blasting Fuse: M60, Weatherproof -----	2-61

CHAPTER 3. ELECTRICAL BLASTING EQUIPMENT

Blasting Machine M32/M34 -----	3-3
Blasting Machine, 10-Cap (Dixon) (Most Recent Model of this Type) -----	3-5
Blasting Machine, 10-Cap Fidelity Type or White Rodgers Type -----	3-7
Blasting Machine, 50-Cap (Most Recently Issued Type) -----	3-9
Blasting Machine, 30-Cap (Generator Type) -----	3-11
Blasting Machine, 50-Cap (Generator Type) -----	3-13
Blasting Machine, 100-Cap (Generator Type) -----	3-15
Test Set, Blasting Cap: M51 -----	3-17
Galvanometer, Blasting -----	3-19
Battery, Standard Galvanometer Type BA-245/u -----	3-21
Battery, Low Temperature Galvanometer -----	3-23

CHAPTER 4. CHARGES

Charge, Demolition: Cratering, 43-Pound -----	4-3
Charge, Explosive, Springing (for Rod, Earth, Blast Driven, M13) -----	4-5
Charge, Propelling, Earth Rod: M12 -----	4-7
Dynamite: Military, M1 -----	4-9
TNT Block Demolition Charges-Charge, Demolition: Block (1/4-, 1/2, 1-Pound) TNT -----	4-11
Destructor, Explosive: Universal, M10 -----	4-13
Destructor, Explosive: M19 -----	4-15
Charge, Demolition: Shaped, M2A3 and M2A4 15-pound -----	4-17
Charge, Demolition: Shaped, M3 and M3A1 40-pound -----	4-19
Charge, Demolition, Shaped, Linear, Flexible: 20, 30, 40, 60, 75 Grains-per-foot -----	4-20.1
Charge, Demolition, Shaped, Linear, Flexible: 125, 225, 300, 400, 500 and 600 Grains-per-foot -----	4-20.3
Charge, Demolition: Block M118 (Flex-X Sheet Explosive) ---	4-21
Charge, Demolition, Roll: M186 (Flex-X Sheet Explosive) ---	4-23
Charge, Demolition, Block M112 -----	4-25
Charge, Demolition: Block M5 and M5A1 -----	4-27
Charge, Demolition: Block M3 -----	4-29
Charge, Demolition: Block M2, Tetrytol -----	4-31
Charge, Demolition, Linear, HE, M58, M58A1, M58A3 -----	4-33

	<u>Page</u>
Charge, EOD, MK 86, Mod 0 -----	4-35
Charge, EOD, MK 87, Mod 0 -----	4-37
Charge, EOD, MK 88, Mod 0 -----	4-39
Charge, EOD, MK 89, Mod 0 -----	4-41
Cutters, Powder Actuated: MK 23, Mod 0 -----	4-43
Cutters, Powder Actuated: MK 24, Mod 0 -----	4-45

CHAPTER 5. DEMOLITION KITS AND ASSEMBLIES

Charge, Demolition: Assembly M37 -----	5-3
Charge, Demolition: Assembly M183 -----	5-5
Demolition Kit, Bangalore Torpedo: M1A1 and M1A2 -----	5-7
Demolition Equipment Set: Explosive Initiating, Nonelectric -----	J-9
Demolition Equipment Set: Explosive Initiating, Electric and Nonelectric -----	5-11
Demolition Kit, Projected Charge: M1 and M1A1 (M1E1) --	5-15
Demolition Kit, Projected Charge: M157 -----	5-17
Demolition Kit, Projected Charge: M173 -----	5-23
Demolition Kit, Cratering M180-Demolition Kit, Cratering, Training: M270 -----	5-25
Explosive Kit, Earth Rod: Set No. 1 -----	5-29
Tripod M23 Assembly for Blast Driven Earth Rod M13 -----	5-32

CHAPTER 6. INCENDIARY DEVICES

Cryptographic Equipment Destroyer, Incendiary (Typical): M1A1, M1A2, and M2A1-----	6-3
File Destroyer, Incendiary, ABC-M4-----	6-5
Document Destroyer, Emergency, Incendiary: M3 -----	6-7
Document Destroyer, Emergency, Incendiary: M4 -----	6-11

CHAPTER 1

INTRODUCTION

1-1. PURPOSE

This manual is a reference handbook published as an aid in planning, training, familiarization, and identification of demolition items.

1-2. SCOPE

a. For each item of materiel, there are illustrations and descriptions together with characteristics and related data. Included in the related data are weights, dimensions, performance data, packing, shipping and storage data, type classification, and logistics control codes (LCC).

b. Information concerning supply, operation, and maintenance of the items will be found in the publications referenced for those items. A complete listing of these publications is maintained in DA Pam 310 series indexes.

c. Within this manual, items with the following type-classifications are included:

- (1) Standard (LCC-A), (LCC-B).
- (2) Contingency (COM).
- (3) Limited Procurement (LP).
- (4) Reclassified obsolete (OBS) for regular Army use, but used by National Guard or Reserve units.

(5) Reclassified OBS for all Army use, but used by Marine Corps, Air Force or Navy. Items with the following type-classification are not included: Reclassified OBS for all US use. No US stocks remain. (Foreign use or stock may remain).

d. Numerical values, such as weights, dimensions, candlepower, etc., are nominal values, except when specified as maximum or minimum. Actual items may vary slightly from these values. Allowable limits can be obtained from the drawings indicated in the data sheets.

1-3. METRIC CONVERSION CHART

For approximate conversions to/from metric measures see figure 1-1.

1-4. Quantity-Distance Classes and Storage Compatibility Groups.

Quantity-Distance (QD) classes and Storage Compatibility groups (SCG) listed in this manual are changed. For conversion to new system see Table 1-1, below.

Table 1-1. Quantity-Distance Classes and Storage Compatibility Groups

Quantity-distance hazard class 1*		Storage Compatibility Group 1* 3*	
Old	New 2*	Typical - New	
8	6.1		D
7	1.1		E
6	1.2(18)		
5	1.2(12)		
4	1.2(08)		F
3	1.2(04)		G
2	1.3		C
1	1.4		S

Notes:

1* New QD and SCG's are compatible with classes used by NATO nations.

2* Numbers in parenthesis are minimum distance x 100 feet to protect against specific fragment hazards and vary with items and types of ammunition. (Refer to TM 9-1300-206).

3* There is no simple conversion from old SCG's to new system. The SCG groups listed in this column are typical for the majority of items in the corresponding listed QD class but do not apply to every individual item in the class. For SCG of individual items refer to TM 9-1300-206.

METRIC CONVERSION CHART

Approximate Conversions to Metric Measures				Approximate Conversions from Metric Measures			
Symbol	When You Know	Multiply by	To Find	Symbol	When You Know	Multiply by	To Find
LENGTH				LENGTH			
in	inches	2.5	centimeters	cm	centimeters	0.04	inches
ft	feet	30	centimeters	m	meters	3.3	feet
yd	yards	0.9	meters	m	meters	1.1	yards
mi	miles	1.6	kilometers	km	kilometers	0.6	miles
AREA				AREA			
in ²	square inches	6.5	square centimeters	cm ²	square centimeters	0.16	square inches
ft ²	square feet	0.09	square meters	m ²	square meters	1.2	square yards
yd ²	square yards	0.8	square meters	km ²	square kilometers	0.4	square miles
mi ²	square miles	2.6	square kilometers	ha	hectares (10,000 m ²)	2.5	acres
WEIGHT				WEIGHT			
oz	ounces	28	grams	g	grams	0.035	ounces
lb	pounds	0.45	kilograms	kg	kilograms	2.2	pounds
	short tons (2000 lb)	0.9	tonnes	t	tonnes (1000 kg)	1.1	short tons
VOLUME				VOLUME			
tp	teaspoons	5	milliliters	ml	milliliters	0.03	fluid ounces
Tbsp	tablespoons	15	milliliters	l	liters	2.1	pints
fl oz	fluid ounces	30	milliliters	l	liters	1.06	quarts
c	cups	0.24	liters	l	liters	0.26	gallons
pt	pints	0.47	liters	m ³	cubic meters	35	cubic feet
qt	quarts	0.95	liters	m ³	cubic meters	1.3	cubic yards
gal	gallons	3.8	liters				
cu ft	cubic feet	0.03	cubic meters				
yd ³	cubic yards	0.76	cubic meters				
TEMPERATURE				TEMPERATURE			
°F	Fahrenheit	Subtract 32	Multiply by .55	°C	Celsius	Add 1.8	To Find Fahrenheit
			To Find Celsius				

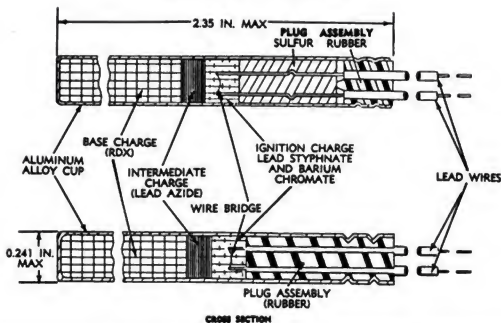
AR 101380-A

Figure 1-1. Metric conversion chart.

CHAPTER 2
INITIATING AND PRIMING DEVICES

THIS PAGE INTENTIONALLY LEFT BLANK

CAP, BLASTING, ELECTRIC: M6

Type Classification:

Std A OTCM 37401, dtd 26 May 1960.

Use:

Electric Blasting Cap M6 is used to initiate high explosives with a blasting machine or other suitable source of electric power. It is capable of detonating all standard military explosives.

Description:

Blasting Cap M6 consists of a base charge of RDX, an intermediate charge of lead azide and an ignition charge of smokeless powder, potassium chlorate and lead salt of dinitro cresol in an aluminum alloy cup. Two 12-foot lead wires, connected by a bridge wire in the ignition charge, extend through a rubber (or rubber and sulfur) plug assembly in the open end of the cup. Two circumferential crimps secure the plug assembly in the cup.

Functioning:

To function the cap, its leads are connected to a blasting machine. The blasting machine is actuated to produce electrical current which flows through the cap's bridge wire producing heat. If sufficient current is put through the bridge wire the heat ignites the ignition charge which initiates the intermediate charge which, in turn, causes detonation of the base charge.

Tabulated Data:

Container material-----	Aluminum alloy
Color-----	Unpainted
Dimensions-----	2.35 in. x 0.24 in.
Filler:	
Base charge-----	RDX
Intermediate charge-----	Lead Azide
Ignition charge-----	Special Mix (e.g. Smokeless Powder)
Method of actuation-----	Electric current

Shipping and Storage Data:

Quantity-distance class-----1.1
 Storage compatibility group----B
 DOT shipping classification----Explosive C
 DOT designation-----ELECTRIC BLASTING
 CAPS
 DODIC-----M130
 Specification-----MIL-C-14003 A
 Packaging-----6 Per Carton
 1 Carton Per
 Barrier Bag
 25 Bags Per Fiber
 Board Container
 6 Containers (900
 Caps) Per Wooden
 Box (Or As Re-
 quired)

Packing box:

Weight (w/contents)-----113 lb
 Dimensions-----23-1/8 x 19-1/2
 x 21 in.
 Cube-----5.48 cu ft

References:

FM 5-25
 TM 9-1375-213-12
 TM 9-1375-213-34
 SC/1340/98 IL

Drawing -----8830951
 Packaging-----6 per carton, one
 carton per vapor-
 proof bag, 50
 bags per fiber-
 board container,
 12 containers
 (3600 caps) per
 waterproof lined
 wooden box or
 10/50/10=5000

Packing box:
 Dimensions-----23-1/8 in. x 19-
 1/2 in. x 21 in.
 Cube-----5.48 cu ft

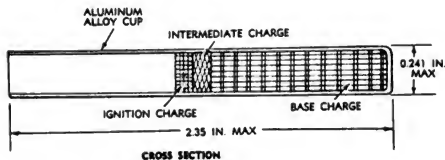
Packing box:

Weight (w/contents)-----114 lb

Reference:

FM 5-25
 TM 9-1375-213-12
 TM 9-1375-213-34
 SC 1340/98 IL

CAP, BLASTING: SPECIAL, NONELECTRIC, J-1 (TYPE 1)



AR 101135

Type Classification:

Std OTCM 36841, dtd 1958.

Use:

Nonelectric Blasting Cap J-1 is used to prime all standard military explosives.

Description:

This nonelectric cap consists of a tube-shaped aluminum alloy cup, containing an ignition charge of lead styphnate and lead azide, and a base charge of RDX or PETN. The charges are pressed in place. The open end of the cup is designed to accommodate time blasting fuse, detonating cord or the nipple end of a firing device coupling base.

Functioning:

On initiation by a flame or impact, the ignition charge detonates the intermediate charge which activates the intermediate charge which

activates the base charge, in turn. Detonation of the base charge initiates the explosive charge.

Tabulated Data:

Container material-----Aluminum Alloy
Dimensions-----2.35 in. x 0.24 in.

Filler:

Base charge-----RDX or PETN
Intermediate charge-----Lead azide
Ignition charge-----Lead styphnate & lead azide
Method of actuation-----Flame or impact

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----B
DOT shipping classification-----C Explosive
DOT designation-----BLASTING CAPS
DODIC-----M131
Specification-----MIL-C-14003

Packaging-----50 per can, 20
cans per fiber-
board carton,
five cartons
(5000 caps) per
waterproof wooden
box

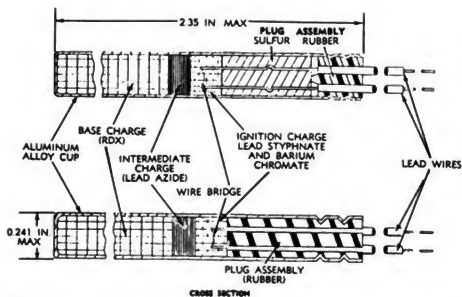
Packing Box:
Weight (w/contents)-----66 lb

Dimensions-----23-3/4 in. x 17-
1/8 in. x 14 in.
Cube-----3.1 cu ft

References:

FM 5-25
TM 9-1375-213-12
TM 9-1375-213-34
SC 1340/98 IL

CAP, BLASTING, ELECTRIC, SPECIAL, J-2, TYPE II

Type Classification:

Std OTCM 36841, dtd 1958.

Use:

Blasting caps are initiating devices used to detonate high explosives.

Description:

Blasting Cap J-2 consists of an aluminum cup filled with a base charge of PETN or RDX, an intermediate charge, usually of lead azide, and an ignition charge usually of a lead styphnate base. Two 12-foot long electrical lead wires, connected by a bridge wire in the ignition charge, extend from the open end of the cup. The wires are sealed in place by a plug assembly made of sulphur and rubber or rubber only. The base ends of the two wires are fastened together by a short-circuiting tab or shunt. Blasting Cap J-2, Type II is used with electric blasting machines to detonate military explosives.

Functioning:

When electric current (from a blasting machine) of 1/2 amp or more is passed through the cap's lead wires, the bridgewire is heated to the point that it initiates the sensitive igniter mix surrounding it. This, in turn, initiates the intermediate charge, which detonates the base charge of high explosive.

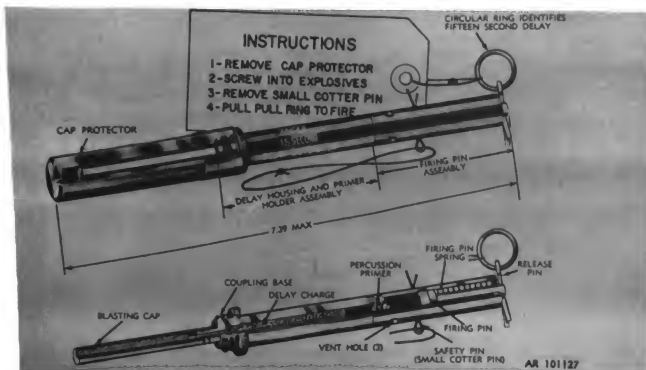
Tabulated Data:

Container material-----	Aluminum alloy
Color-----	Unpainted
Dimensions:	
Length-----	2.35 in. x 0.24 in. dia

Filler:

Base charge-----	PETN or RDX
Intermediate charge-----	Lead azide, lead styphnate & igniter mix
Method of actuation-----	Blasting machine

DETONATOR, PERCUSSION: M1A2, 15-SECOND DELAY

Type Classification:

Std A OTCM 37119, dtd 1959.

Use:

Percussion Detonator M1A2 is a device used to initiate demolition charges after a 15-second delay. This type of detonator can be used underwater, and is particularly effective during assault demolition.

Description:

The detonator consists of a firing pin assembly, a delay housing and primer holder assembly, and a special blasting cap. The firing pin and spring, comprising the main components of the firing pin assembly, are held in position by a safety pin and a release pin. The primer holder is fitted with a percussion primer, and the delay housing contains a delay train of a pyrotechnical mixture. The blasting cap is crimped to a coupling base which is an integral part of the delay housing. The blasting cap is covered, during shipment and storage, by a cap protector. The special blasting cap is similar to the M7 Blasting Cap. The main difference is that the igniter compound is adjusted

to maintain a certain dimension at the open end of the cap. The 15-second delay percussion detonator may be distinguished from the 8-second delay percussion detonator by the markings on the surface of the delay housings and by the shapes of the release pull rings. The 15-second delay percussion detonator has a circular pull ring, while the pull ring on the 8-second delay detonator is shaped like a T.

Functioning:

After the safety pin is removed and the release pin is pulled, the firing pin strikes the primer, which ignites the pyrotechnic delay train. At the end of the delay train, the burning powder ignites the igniter mix in the blasting cap and consequently the blasting cap detonates other explosives. It should be noted that, above 60°F, the actual delay time will be less than normal while below 60°F the delay time will be greater.

Tabulated Data:

Container material-----	Metal
Color-----	Olive drab w/yellow markings
Weight-----	3 oz

Dimensions:

Length-----7-1/3 in.
 Diameter-----7/16 in.
 Filler-----Delay mix, primer-
 mix, RDX
 Method of actuation-----Release pin

Shipping and Storage Data:

Quantity-distance class-----A 1.1
 Storage compatibility group----B
 DOT shipping classification----Class A
 DOT designation-----TIME FUZES—
 HANDLE CAREFULLY
 DODIC-----M450
 NSN-----1375-00-729-4378
 Drawing-----879903
 Packaging-----One detonator per
 tube assembly, 10
 tube assemblies
 per paperboard
 carton, one
 carton per bar-
 rier bag, 5 bags
 per fiberboard
 outer carton,
 each outer carton
 in outer barrier
 bag, 4 outer bar-
 rier bags (200
 detonators) per
 wooden box.

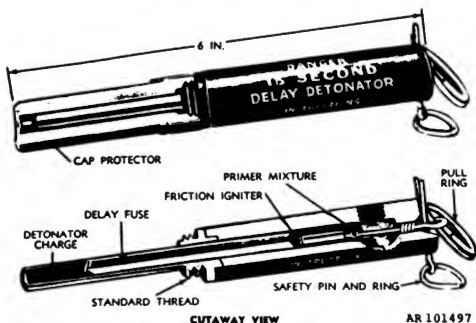
Packing box:

Weight (w/contents)-----62 lb
 Dimensions-----21-1/2 in. x 17-
 11/16 in. x
 18-15/32 in.
 Cube-----4.05 cu ft

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL

DETONATOR, FRICTION: 15 SEC DELAY M1 OR M1A1

Type Classification:

OBS AMCTCM 6418, dtd 1968.

Use:

The 15-Second Friction Delay Detonator is a device used to initiate demolition charges after a 15-second delay. This delay detonator is effective during assault operations and may be used under water.

Description:

This Delay Detonator consists of a cylindrical-shaped plastic housing containing a pull-wire coated with a friction material. The pull-wire is set in a flash compound. A tube set in the lower end of the housing is a combination delay and blasting cap. There is a 15-second delay-mix facing the friction lighter side followed by an igniter charge and then a primer charge and, finally, a blasting cap mix. There is a protective cap covering the blasting cap end and a safety cotter pin with a ring for extracting which is positioned through the pull-wire to block its premature movement.

This detonator is identical to the 8-Second Delay Friction Detonator M2. The 15-Second Delay Detonator has a pull ring on the friction wire, while the 8-Second Delay has a "T" handle. Each delay detonator is appropriately marked.

Functioning:

With the safety pin removed, the pull wire handle (ring) is pulled to draw the friction-coated portion of the pull wire through the flash charge. This ignites the delay column. At the end of 15 seconds, the flame reaches the end of the delay mix and ignites the igniter mix. This in turn initiates the primer charge which then detonates the blasting cap portion. The detonation in turn sets off the demolition charge.

Tabulated Data:

Container material-----	Plastic
Color-----	Olive drab
Weight-----	8 oz (approx)
Dimensions:	
Length-----	6 in. (approx)
Diameter-----	3/4 in. (approx)
Filler-----	Friction powder delay mix, and RDX
Method of actuating-----	Pull wire
Quantity-distance class-----	1.1
Storage compatibility group-----	B
DOT shipping classification-----	A
DOT designation-----	TIME FUZES— HANDLE CAREFULLY

Shipping and Storage Data:

DODIC-----	M542
NSN-----	Not available
Drawing-----	F 73-9-110

Packaging -----10 detonators/
cardboard box;
6 boxes in an
inner packing;
4 inner packs
(200 detonators)
per wooden box

Packing box:

Weight-----53 lb

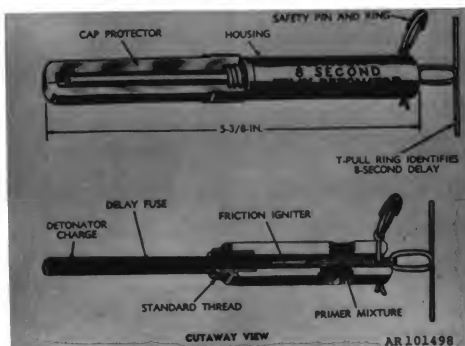
Dimensions-----21-1/2 in. x 17-
11/16 in. x 18-
18/32 in. (ap-
prox)

Cube-----4.05 cu ft

References:

FM 5-25
TM 9-1375-213-12
TM 9-1375-213-34
SC 1340/98 IL

DETONATOR FRICTION 8-SECOND DELAY M2

Type Classification:

OBS AMCTCM 6418, dtd 1968.

Use:

The 8-Second Friction Delay Detonator is a device used to initiate demolition charges after 8 seconds delay. This delay detonator is effective during assault operations and may be used under water.

Description:

This delay detonator consists of a cylindrical-shaped plastic housing containing a pull wire coated with a friction material. The pull wire is set in a flash compound. A tube set in the lower end of the housing is a combination delay and blasting cap. There is a 15-second delay mix facing the friction lighter side, followed by an igniter charge, then a primer charge and, finally a blasting cap mix. There is a protective cap covering the blasting cap end and a safety cotter pin with a ring for extracting which is positioned through the pull wire to block its premature movement.

This detonator is identical to the Friction Delay, the Friction Detonator 15-Second Delay M1 or M1A1. The 15 Second Delay Detonator has a pull ring on the friction wire, while the 8-Second Delay has a "T" handle. Each delay detonator is appropriately marked.

Functioning:

With the safety pin removed, the pull wire handle (ring) is pulled to draw the friction coated portion of the pull wire through the flash charge. This ignites the delay column. At the end of 8 seconds, the flame reaches the end of the delay mix and ignites the igniter mix. This, in turn, initiates the primer charge which then detonates the blasting cap portion. The detonation, in turn, sets off the demolition charge.

Tabulated Data:

Container material-----	Plastic
Color-----	Olive drab
Dimensions:	
Length-----	5-3/8 in. (approx)
Diameter-----	3/4 in. (approx)
Filler-----	Friction powder, delay mix, and RDX
Method of actuating-----	Pull wire
Quantity-distance class-----	1.1
Storage compatibility group-----	B
DOT shipping classification-----	A
DOT designation-----	TIME FUZES—HANDLE CAREFULLY

Shipping and Storage Data:

DODIC-----	M541
Drawing-----	F 73-9-110

NSN-----Not available
 Packaging-----10 detonators/card-
 board box
 6 boxes in an in-
 ner packing
 4 inner packs (240
 detonators) per
 wooden box

Packing Box:

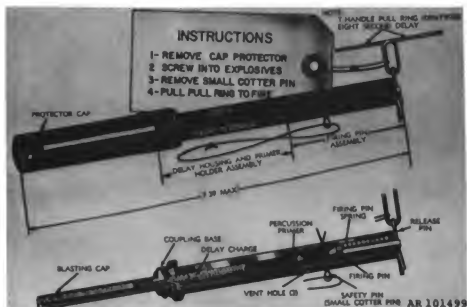
Drawing-----Not available

Weight-----53 lb
 Dimensions-----21-1/2 in. x 17
 11/16 in. x 18
 18/32 (approx)
 in.
 Cube-----4.05 cu ft

References:

FM 5-25
 TM 9-1375-213-12
 TM 9-1375-213-34
 SC 1340/98 1L

DETONATOR, PERCUSSION: M2A1, 8-SECOND DELAY



Type Classification:

C & T Material Status Record 11756003.

Use:

Percussion Detonator M2A1 is a device used to initiate demolition charges after an 8-second delay. This type of detonator can be used underwater, and is particularly effective during assault demolition.

Description:

The detonator consists of a firing pin assembly, a delay housing and primer holder assembly, and a special blasting cap. The firing pin and spring, comprising the main component of the firing pin assembly, are held in position by a safety pin and a release pin. The primer holder is fitted with a percussion primer, and the delay housing contains a delay train of a pyrotechnical mixture. The blasting cap is covered during shipment and storage, by a cap protector. This special blasting cap is similar to the M7 blasting cap. The main difference is that the igniter compound is adjusted to maintain a certain dimension at the open end of the cup. The 15-second delay percussion detonator may be distinguished from the 8-second delay percussion detonator by the markings on the surface of the delay housings and by the shapes of the release pull rings. The 15-second delay percussion detonator has a circular

pull ring. While the pull on 8-second delay detonator is shaped like a T.

Functioning:

After the safety pin is removed and the release pin is pulled, the firing pin strikes the primer, which ignites the pyrotechnic delay train. At the end of the delay train, the burning powder ignites the igniter mix in the blasting cap and consequently the blasting cap detonates other explosives. It should be noted that above 60°F the actual delay time will be less than nominal and below 60°F, the delay time will be greater.

Tabulated Data:

Container material-----	Metal
Color-----	Olive drab w/yel-low markings
Weight-----	3 oz
Dimensions:	
Length-----	7-1/3 in.
Diameter-----	7/16 in.
Filler-----	Delay mix, primer-mix and RDX
Method of actuation-----	Release pin

Shipping and Storage Data:

Quantity-distance class-----	1.1
Storage compatibility group-----	B
DOT shipping classification-----	Class A
DDIC-----	M448

DOT designation-----TIME FUZES—
 -----HANDLE CAREFULLY
 NSN-----1375-00-729-4375
 Drawing-----8799903
 Packaging -----One detonator per
 tube assembly,
 10 tube assemblies
 per paperboard
 carton, one carton
 per barrier bag,
 5 bags per fiber-
 board outer
 carton, each
 outer carton in
 outer barrier bag,
 4 outer barrier
 bags per wooden
 box.

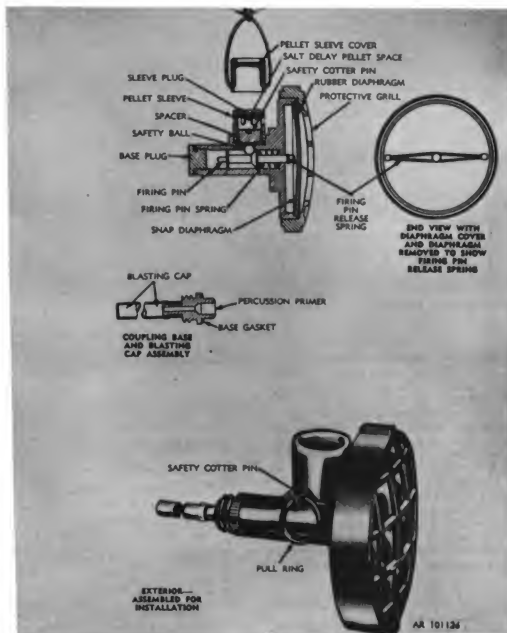
Packing box:

Weight (w/contents)-----62 lb
 Dimensions -----21-1/2 in. x 17-
 11/16 in. x 18-
 15/32 in.
 Cube -----4.05 cu ft

References:

FM 5-25
 TM 9-1375-213-12
 TM 9-1375-213-34
 SC 1340/98 IL

DETONATOR KIT, CONCUSSION: M1

Type Classification:

Std OTCM 36841, dtd 1958.

Use:

Concussion Detonator Kit M1 is a mechanical device used to simultaneously detonate a number of demolition charges, underwater or above ground. It is distinguished by the fact that

simultaneous detonation occurs without connecting demolition charges by detonating cord or other firing systems. The concussion detonator is actuated when it receives a detonation wave or an impulse through water or air.

Description:

Each kit contains a firing mechanism, a coupling base and blasting cap assembly, and

two salt delay pallets. Their details are as follows:

(1) The firing mechanism has a convex, snap-type, bronze diaphragm faced with a sheet-rubber diaphragm and a protective grill. The bronze diaphragm is positioned directly above a split firing-pin release spring which, together with a steel safety ball and a cotter pin, holds the firing pin spring in the SAFE position. A perforated pellet sleeve mounted above the firing pin houses a metal spacer and a salt pellet. A removable paper pellet-sleeve cover prevents the salt pellet from dissolving prematurely. For shipping and storage, the firing mechanism is fitted with a base plug.

(2) The coupling base and blasting cap assembly consists of threaded coupling base assembled with a primer and a blasting cap.

(3) The two salt delay pellets, used in underwater installation only, are color coded to indicate delay times. The blue pellet takes approximately 3-1/2 minutes to dissolve; the yellow pellet, approximately 7 minutes.

Functioning:

(1) Underwater. When the safety pin is pulled and the pellet sleeve cover removed, water flows through the holes in the pellet sleeve, dissolving the salt pellet. With the salt pellet dissolved, the metal spacer and safety ball are free to move up in the pellet sleeve, leaving the firing pin release spring as the only restraint on the firing pin. Detonation is initiated by a shock wave from a detonating charge nearby. When the shock wave strikes the diaphragm, it snaps back against the firing release spring, driving the firing pin into the primer. The primer initiates the blasting cap which detonates the demolition charge. Do not use this concussion detonator in depths of more than 15 feet. The hydrostatic pressure at greater depths may function the device.

(2) In air. The salt pellet and pellet sleeve cover are not used in above ground installations. The detonator functions above ground the same as underwater except that there is no delay in arming after the safety cotter pin is removed.

Tabulated Data:

Container material-----Metal
Color-----Olive drab w/yellow markings
Weight-----11 oz
Dimensions:
Length-----5 in.
Diameter-----3 in. (max)
Explosive components-----Primer, blasting cap
Method of actuation-----Shock wave

Shipping and Storage Data:

Quantity-distance class----- (04) 1.2
Storage compatibility group-----B
DOT shipping classification-----Class C
DOT designation-----DETONATING FUZES
DODIC-----M540
NSN-----1375-00-028-5173
Drawing-----73-104
Packaging-----One kit per metal container, hermetically sealed; 50 containers per wooden box

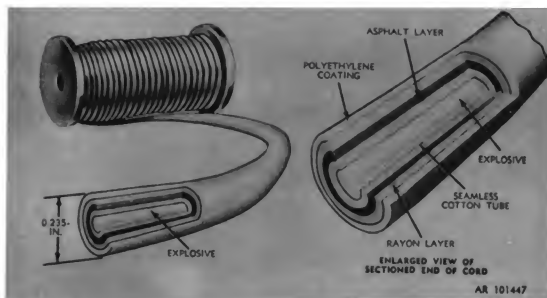
Packing Box:

Weight (w/contents)-----59 lb
Dimensions-----20-3/8 in. x 18-3/16 in. x 11-1/32 in.
Cube-----2.4 cu ft

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL

CORD, DETONATING

Type Classification:

Std A OTCM 36841, dtd 1958.

Use:

Detonating Cord is used to prime and detonate other explosive charges.

Description:

Although Specification MIL-C-17124 lists 12 different detonating cords, this data sheet addresses Type 1, Class E only because it is the only detonating cord standard for US Army use. This type of detonating cord consists of a core of high velocity explosive in a seamless textile tube. The tube is covered with a thin layer of asphalt, and sheathed in an outer cover of plastic coated textile. The plastic outer cover is smooth and colored olive drab. It has a detonating velocity of not less than 5,900 meters per seconds.

Functioning:

When the explosive core of the detonating cord is detonated by a blasting cap, the detonating wave travels along the cord to other blasting caps or explosive charges attached to it.

Tabulated Data:

Color-----Olive drab
Filler-----PETN

Weight (per 1000 ft):

Class E-----22 lb

Diameter:

Type 1 Class E-----0.235 in.

Method of actuation-----Blasting capShipping and Storage Data:

Quantity-distance class-----1.1

Storage compatibility group-----D-2

DOT shipping classification-----Class C

DOT designation-----CCPC DETONATING

FUSE HANDLE
CAREFULLY

DODIC-----M456

Packaging-----100 to 1000 foot/
spool Up to 8000
foot/wooden box

Packing Box:

Weight (w/contents) }
Dimensions }-----As required
Cube }

References:

TM 9-1375-213-12

TM 9-1375-213-34

FM 5-25

SC 1340/98 1L

THIS PAGE INTENTIONALLY LEFT BLANK

CORD, DETONATING: INERT-REINFORCED, DUMMY



AR 101137

Type Classification:

Std A OTCM 36841, dtd 1958.

Use:

Inert detonating cord is used in training demolition personnel in the proper procedures for priming demolition charges.

Description:

This inert detonating cord, similar to Type I, Class E in construction and external appearance, consists of an asphalt-coated cotton tube sheathed in an outer cover of smooth plastic coated rayon. The inert cord differs from the service cord in that the cord of the training item is inert loaded with poly-vinyl chloride (PVC) filler and the plastic outer coat is blue.

Functioning:

The inert detonating cord is used in demonstration and training for demolition and it does not perform any ballistic function.

Tabulated Data:

Color-----Blue
 White (per 1000 ft)-----22 lb
 Diameter-----Approx 0.235 in.
 Filler-----PVC

Shipping and Storage Data:


Quantity-distance class-----N/A
 Storage compatibility group-----N/A
 DOT shipping classification-----N/A
 DOT designation-----N/A
 DODIC-----M458
 Specification-----MIL-C-17124
 Packaging-----As required

References:

FM 5-25
 TM 9-1375-213-12
 TM 9-1375-213-34
 SC 1340/98 IL

THIS PAGE INTENTIONALLY LEFT BLANK

COUPLING BASE, FIRING DEVICE



INTERNAL



EXTERNAL

ARD80-0289

Type Classification:

Std A AMCTM 3802, dtd 1965.

Use:

The coupling base provides the means for holding a primer and positioning it in a firing device so that the firing pin of the firing device will strike it properly to function the primer. It is designed for assembly to any military standard nonelectric blasting cap. Firing devices are supplied with base couplings. Base couplings are stocked for use in renovation and for use in replacement of base couplings expended in training.

Description:

The base is fitted with an M27 primer on one end and the other end is fitted with a protective shipping cap. The coupling base has two sets of external threads. One end permits assembly into the firing devices and the other end can be threaded into the explosive's capwell. The rubber seal in the nipple seals the coupling into the blasting cap. The blasting cap user crimps the blasting cap onto the nipple.

The coupling base is cylindrical in shape and is made of metal.

Functioning:

When the firing device functions, its firing pin strikes the primer. The primer ignites and, in turn, initiates the blasting cap. The blasting cap functions the explosive charge.

Tabulated Data:

Item material-----Zinc based casting alloy
Color-----Olive drab
Dimensions:
Length-----1 in.
Diameter-----3/4 in.
Explosive component-----M27 (old) or M39A1 (new) primer or commercial equivalent

Shipping and Storage Data:

Quantity-distance class-1.4
Storage compatibility group-----B
DOT shipping classification-----C
DOT designation-----SMALL ARMS PRIMER-HANDLE CAREFULLY
DODIC-----M327
Specification-----MIL-B-1596
Packaging-----50/wtrprf ctn
10 ctn (500 bases) per wooden box

Packing Box:

Weight (w/contents)-----48 lb

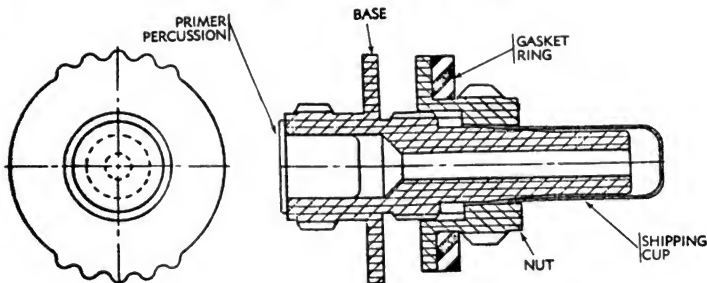
TM 43-0001-38

Dimensions-----19-13/16 in. x
17-3/4 in. x
12-7/32 in.
Cube-----2.5 cu ft

50/wtrprf carton-----10 ctn (500
case/wooden
box

Reference: MIL-8 11596

COUPLING BASE, FIRING DEVICE: NON-METALLIC M2



AR 101495

Type Classification:

Std A AMCTM 3802, dtd 1965.

Use:

The coupling base provides the means for holding a primer and positioning it in a firing device so that the firing pin of the firing device will strike it properly to function the primer. It is especially designed for assembly to an M7 blasting cap. Firing devices are supplied with base couplings. Those currently stocked have metallic ones; new procurements will contain this base coupling. Base couplings are stocked for use in renovation and for use in replenishment of base couplings expended in training.

Description:

This item is comprised of three main plastic pieces:

a. A base fitted with an M39A1 primer on one end and the other end covered with a protective shipping cap. The base has two sets of external threads. The primer side has threads to permit the assembly to firing devices and the other end has threads to accommodate a nut, such that it will jam the flared end of an M7 blasting cap against the protrusion and make a watertight seal (analogous to a tubing compression fitting).

b. A nut which has internal threads to mate with the base and external threads to mate with demolition charges. The nut is so constructed that its internal conical shape mates with the conical shape of the base (blasting cap end).

c. A gasket is positioned on the nut to assure a watertight fit between the nut and the explosive item.

Functioning:

When the firing device functions, its firing pin strikes the primer. The primer ignites and, in turn, initiates the blasting cap. The blasting cap functions the explosive charge.

Tabulated Data:

Item material-----	Plastic
Color-----	Black, olive drab
Dimensions:	
Length-----	1 in.
Diameter-----	3/4 in.
Explosive component-----	M39A1 primer
<u>Shipping and Storage Data:</u>	
Quantity-distance class-----	1.4
Storage compatibility group----	B
DOT shipping classification----	C
DOT designation-----	SMALL ARMS PRIMER—HANDLE CAREFULLY

Change 2

2-27

Shipping and Storage Data:

DODIC-----M327
 Drawing-----8837262
 Packaging-----250/carton, 6
 cartons (1500
 boxes) wooden

Packing Box:


Weight (w/contents)----60 lb
 Dimensions-----19-13/16 in. x
 17-3/4 in. x
 12-7/32 in.

Cube-----2.5 cu ft
 50/wtrprf carton-----10 ctn (500
 case/wooden
 box

References:

MIL-B-11596
 FM 5-25
 TM 9-1375-213-12
 TM 9-1375-213-34
 SC 1340/98-IL

COUPLING BODY



AR 102150-A

Type Classification:

Std A.

Use:

The coupling body provides the means for holding a primer and positioning it in a firing device so that the firing pin of the firing device will strike it properly to function the primer. It also provides the means of securing a blasting cap to the firing device so that it will be initiated by firing of the primer. The coupling body is functionally interchangeable with the coupling bases used with older firing devices in this mode of operation and has the additional alternate capability of lighting a time blasting fuse for short delay type booby traps. The coupling body is currently (1980) used only as a component of the M142 Firing device.

Description:

The coupling body is a cylindrical plastic assembly that contains the explosive initiating element, an M42 primer, and a screw-on cap assembly that will secure either a non-electric blasting cap or a time blasting fuse into the body. The primer end is threaded to fit into the body of a mechanical firing device. The other end is threaded to mate with the capwells of older explosive charges or (by threading on the packing nut) to provide a waterproof seal around the blasting cap or time blasting fuse.

Functioning:

When the firing device functions, its firing pin strikes the primer. The primer ignites and, in turn, initiates the blasting cap or lights the time blasting fuse.

Tabulated Data:

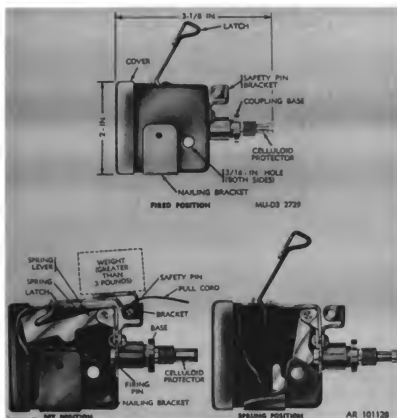
Item material-----Plastic
Color-----Olive drab
Dimensions:
 Length-----1-9/16 in.
 Diameter-----9/16 in.
Explosive component-----M42 primer
Quantity-distance class-----1.4
Storage compatibility group-----B
DOT shipping classification-----C

DOT designation-----SMALL ARMS PRIMER-----
HANDLE CAREFULLY
DODIC-----Not available

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
MIL-B 11596
SC 1340/98 IL

FIRING DEVICE, DEMOLITION: M1, RELEASE TYPE

Type Classification:

C&T, T MSRS 1176003.

Use:

Firing Device M1, a release-type device, actuated by the removal of a restraining weight, is used in setting up boobytraps.

Description:

This firing device has a cube-shaped body with a primed coupling base extending from one side. The opposite side is fitted with a detachable cover. The body houses the firing mechanism which includes a firing pin, a spring, a spring lever and a latch. The latch engages a lip on the lever and extends through an opening in the top of the body to a bracket mounted above the coupling device. The latch is held in safe position by a safety pin inserted through the bracket. Holes on opposite sides of the body permit the insertion of a nail or heavy-gauge wire for added safety. A nailing bracket

is welded to the base of the device for use in installation. The coupling base, fitted with a celluloid protector used during shipping and storage is threaded externally for assembly with the boobytrap. A restraining weight of 3 pounds or more is needed on the spring latch when the device is installed.

Functioning:

Upon removal of the restraining weight, the latch releases the spring lever which springs forward in a 75 degree arc to strike the firing pin. This initiates the primer in the coupling base, which in turn ignites the coupled blasting cap and the resulting detonating blasting cap sets off the explosive device.

Tabulated Data:

Container material-----	Steel
Color-----	Olive drab or plated steel (silver or cadmium gold)

Dimensions (w/coupling
base)-----2 in. x 2 in. x
3 in.
Filler-----Primer mixture
Method of actuation-----Removal of re-
straining load

Shipping and Storage Data:

Quantity-distance class-----1.4
Storage compatibility group-----8
DOT shipping classification-----Class C
DOT designation-----PERCUSSION FUZE
DODIC-----M631
Drawing-----Eng Dwg D39661-1
Packaging-----4 per chipboard
box, 20 boxes
(80 devices) per
wooden box

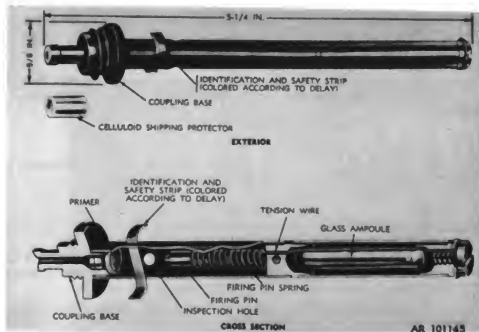
Packing Box:

Weight (w/contents)-----44.1 lb
Dimensions-----26-1/4 in. x
10-1/2 in. x
8-1/2 in.
Cube-----1.35 cu ft

References:

FM 5-25
TM 9-1375-213-12
TM 9-1375-213-34
SC 1340/98 IL
FM 5-31
FM 20-32

FIRING DEVICE, DEMOLITION: M1, DELAY



Type Classification:

Contingency MSRS 11756003.

Use :

Firing Device M1 is a chemically timed device used for delayed action firing of mines and demolition charges.

Description:

The device consists of a two-piece tubular body. The two tubes are joined together by a plug. One half of the body is brass; the other half, very thin copper. The copper half contains a sealed glass ampoule filled with a corrosion chemical. The brass half houses a firing pin and spring and is fitted with a primed base coupling. A restraining wire, attached to the copper end of the body, extends through the entire length of the body to the firing pin. It holds the firing pin in a cocked position so that the firing pin spring is compressed and the wire is under tension. A safety strip, color coded for identification, is positioned through a hole in the firing pin housing to block the firing pin from striking the primer prematurely. The

six different colors of the safety strip denote the six different time delays.

Functioning:

The copper portion holding the glass ampoule is squeezed, the glass ampoule breaks, releasing its chemical filler. The chemical reacts with the restraining wire at a predetermined rate. When the wire is eaten through, the firing pin is released and is driven by the spring into the primer in the coupling base. The resulting flame of the primer ignites the blasting cap, which is attached to base coupling, and consequently detonates the mine or demolition charge. It should be noted that the length of delay time is affected by extremes in temperature to the extent that it increases at low temperatures and decreases at high temperatures.

Tabulated Data:

Body material-----Brass and copper
Color of firing device-----Olive drab w/yel-
low markings
Color coding of safety strips:
6 to 14 minute delay -----Black
12 to 32 minute delay-----Red

Color coding of safety strips:—

Continued
 45 to 115 minute delay----White
 100 to 280 minute delay---Green
 210 to 570 minute delay---Yellow
 610 to 1130 minute delay---Blue

Weight-----1.5 oz

Dimensions:

Length-----5-1/4 in.
 Diameter-----5/8 in.

Filler-----Primer mixture

Method of actuation-----Pressure

Shipping and Storage Data:

Quantity-distance class-----1.4
 Storage compatibility group---B
 DOT shipping classification---Class C
 DOT designation-----TIME FUZES—
 HANDLE CAREFULLY

DODIC:

Color Code:

Black-----M616
 (mixed Pack) Red,
 White, Green
 Yellow, Blue-----M617
 Red-----M619
 White-----M620
 Green-----M621
 Yellow-----M622
 Blue-----M623

Drawing-----8846784

*Packing-----10 per setup box,
 1 box per vapor
 barrier bag, 15
 bagged boxes
 per carton, 1
 carton per bag,
 3 bagged cartons
 (450 devices)
 per wirebound
 wooden box.

Packing Box:

Weight (w/contents)-----56 lb
 Dimensions-----16-2/16 in. x
 14-1/2 in. x
 8-27/32 in.
 Cube-----1.2 cu ft

*Packaged as described herein except as noted
 below. See SC 1340/98 IL for other packs.

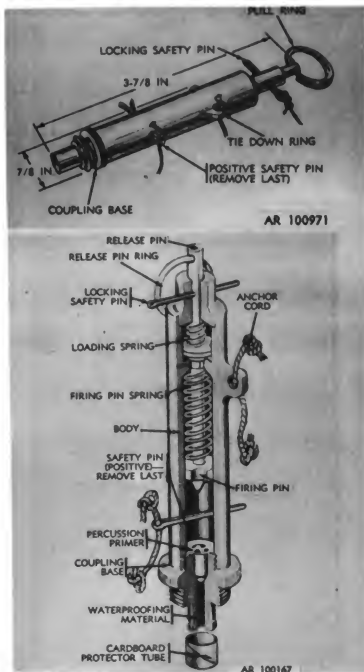
Yellow and Green packed 10/carton, 12 cartons/
 waterproof lined wooden box.

Mixed packed in sets of 10 red, 3 white, 3 green,
 one yellow and one blue per fiberboard box, and
 5 boxes per wooden carton.

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL
 FM 20-32
 FM 5-31

FIRING DEVICE. DEMOLITION: M1. PULL TYPE

Type Classification:

Std A AMCTCM, dtd 1968.

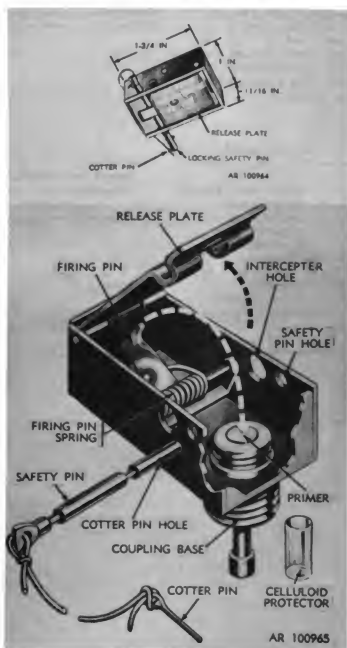
Use:

Pull-type Firing Device M1, activated only by a pull on a trip wire, is used in setting up boobytraps, boobytrapping mines, and as an actuator for improvised antipersonnel mines.

Description:

This firing device consists of a cylindrical case (body), head and coupling base. The head, which is permanently joined to the case, contains a release pin, release pin ring, a loading spring, and a safety pin. The case, which contains the firing mechanism consisting of the firing pin and compression spring, also contains a positive safety pin. The coupling base, which is screwed

FIRING DEVICE, DEMOLITION: M5, PRESSURE RELEASE

Type Classification:

CAT MSRS 11756003.

Use:

Pressure Release Firing Device M5 is used in boobytrap installations to activate mines and demolition charges.

Description:

This device consists of a rectangular body, containing the firing mechanism, and a primed coupling base. The firing mechanism consists of a spring-loaded firing pin, a release plate, and a safety pin. The coupling base, primed with a percussion primer, is threaded to fit in the capwell of a mine activator or demolition charge.

Functioning:

A restraining load of approximately 5 pounds is placed on the firing device at the time of installation. When the restraining load is removed, the release plate moves out of line, releasing the firing pin. The spring-loaded firing pin strikes the primer. The resulting flame from the primer ignites the blasting cap which in turn detonates the charge.

Tabulated Data:

Container material-----Pressed steel
 Color-----Olive drab w/yel-
 low markings
 older items are
 plated steel
 (cadmium-gold
 colored) w/
 black markings
 Weight-----2 oz
 Dimensions-----1-3/4 in. x 1 in.
 x 3/4 in.
 Filler-----Primer mixture
 Method of actuation-----Pressure release

Shipping and Storage Data:


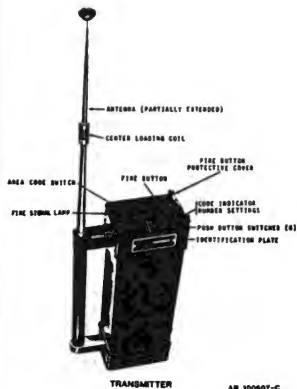
Quantity-distance class-----1.4
 Storage compatibility group---B

DOT shipping classification----Class C
 DOT designation-----PERCUSSION FUZES
 DODIC-----M627
 Drawing-----9249244
 Packaging-----4 firing devices
 per paperboard
 carton, one
 carton, per bar-
 rier bag, 5
 bags per fiber-
 board carton,
 10 cartons (200
 firing devices)
 per wooden box
 Packing box:
 Weight (w/contents)-----46.2 lb
 Dimensions-----21-9/16 in. x 13-
 1/2 in. x 11 in.
 Cube-----1.6 cu ft

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL
 FM 5-31
 FM 20-32

FIRING DEVICE, DEMOLITION: M122

Type Classification:

STD MSR 05816017

Use:

The Demolition Firing Device M122 is used to detonate explosives from a remote location.

Description:

The Demolition Firing Device M122 consists of a separate transmitter and ten receivers. The transmitter transmits coded radio signals to activate a specific receiver and is a one piece, self-contained unit similar in appearance to a walky-talky. The fully transistor-

ized unit, which is powered by a battery pack, can generate, encode and transmit a radio signal to activate a receiver. Over a million different codes may be selected for transmission; therefore, many receivers may be activated from one transmitter in a short period of time.

The receiver, placed in the vicinity of the explosive, initiates the explosive upon receipt of the properly coded radio signal. It is a small box with an integral cylindrical battery compartment on top. It contains the electric circuitry to fire the attached blasting caps upon receiving the properly encoded command signal from a transmitter. Special circuitry allows the receiver to be actuated only by receipt of a coded radio signal unique to the particular receiver. Each and every receiver has its own individual code. Power for the operation of the receiver and for the firing of the blasting caps is a single D cell.

Functioning:

When actuated by the transmitter, the receiver acts as a low capacity electric blasting machine. The full functioning sequence is as follows:

a. Charges, mines, etc. are emplaced and electrically primed in the normal manner.

b. The receiver is emplaced and its antenna is positioned vertically.

c. Firing leads of the blasting cap circuit are connected to the receiver's blasting cap binding posts.

d. The receiver's delay-arming switch is moved to the ARM position and the operating personnel withdraw to the remote firing location.

e. After the arming delay period has passed, the transmitter, (set to the proper code) is functioned when desired

and the receiver fires the **blasting caps**. The receiver can remain on **duty** awaiting its actuation signal for a **long time** (a nominal 20 days can be expected, depending upon environment and battery).

Tabulated Data:

Packing Data:

Shipping box (with contents):

Size:
Length-----25.5 in. (64.8 cm)
Width-----24.5 in. (62.2 cm)
Height-----11.5 in. (29.2 cm)

Weight(as shipped)-75.0 lb (34.0 kg)
Cube-----4.2 cu ft (0.2 cu m)

Carrying case (w/ contents, including batteries):

Size:
Length-----23.75 in. (60.3 cm)
Width-----22.75 in. (57.8 cm)
Height-----8.8 in. (22.4 cm)
Weight-----35 lb (16.6 kg)
Cube-----2.8 cu ft (0.08 cu m)

Transmitter:

NSN ---- 1375-01-021-0606

Size (antenna collapsed):

Length---11.00 in. (28 cm)
Width---2.63 in. (6.37 cm)
Height---6.25 in. (15.87 cm)

Weight:

Without
battery pack---2.25 lb (1.25 kg)

With battery
pack-----4.25 lb (2.13 kg)

Operating
temperature-----25°F to ±125°F
(-32°C to +52°C)

Effective Range:

Nominal-----0.6 mile (1.0 km)

Estimated:

Through dense
foliage-----0.6 mile (1.0 km)
or lessThrough dense
jungle-----0.5 mile (0.8 km)
or lessOver land
(clear line-
of-sight)-----2.0 miles (3.3 km)

Over water-----3.0 miles (5.0 km)

Over frozen
tundra-----0.5 mile (0.8 km)
or lessFrom aircraft
(clear line-
of-sight)-----6.0 miles (10.0 km)

Receiver:

Size:

Length-----4 in. (10 cm)

Width-----4 in. (10 cm)

Height-----4 in. (10 cm)

Weight:

Without
battery-----1.1 lb (0.5 kg)

With battery--1.4 lb (0.6 kg)

Capacity

Nominal (see
Table 2-1 for
details)-----Five M6 electric
Blasting caps in
seriesOperating tem-
perature w/
alkalinebattery----- -25°F to +125°F
(-32°C to +52°C)

Transmitter Battery Pack:

Type-----Alkaline

Voltage-----18v

BA type-----N/A

NSN-----6135-01-110-3516

Size:

Length-----5.1 in. (12.9 cm)

Width-----3.3 in. (8.4 cm)

Height-----2.3 in. (5.8 cm)

Weight-----2.0 lb (0.9 kg)

Marking (initial
production only):Battery, Dry
9296723

Contract No.

Date

18 volts

Manufacturer's name, Plant
Location

Receiver Battery:

Type-----Alkaline

Voltage-----1.5v

BA type-----BA 3030/u

NSN-----6135-00-930-0030

Operating temp

range----- -25°F to +125°F
(-32°C to +52°C)

On-duty life
Nominal-----20 days

Expected receiver
on-duty life using
fresh battery at
various temper-
atures----- -25°F--20 days;
+70°F--50 days;
+125°F--30 days

Type-----Alkaline

Voltage-----1.5v

BA type-----BA 3202/u (being
replaced by BA
3030/u but still
available in
some areas)

NSN-----6135-00-935-8738

Use-----General and low
temperatures

Operating temper-
ature range----- -25°F to +125°F
(-32°C to +52°C)

On-duty life
Nominal-----20 days

Expected receiver
on-duty life using
fresh battery at
various temper-
atures----- -25°F--25 days;
+70°F--50 days;
+125°F--30 days

Alternate Receiver Batteries:

Type-----Zinc Carbon

Voltage-----1.5v

BA type-----BA 30/u

NSN-----6135-00-120-1020

Use-----Limited--Moderate
temperatures only

Operating temper-
ature range-----+60°F to +100°F
(+18°C to +38°C)

Expected receiver
on-duty life using
fresh battery at
various temper-
atures-----0°F--8 hours;
+60°F--20 days;
+100°F--15 days

Type-----Mercury*

Voltage-----1.35v

BA type-----BA 1030/u

NSN-----6135-00-125-5265

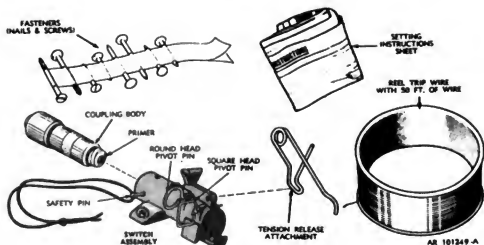
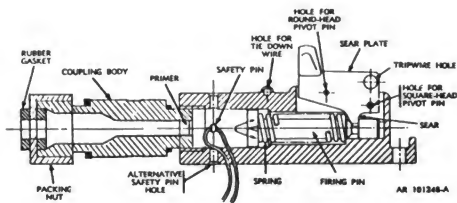
Use-----High temperature

Operating temper-
ature range-----+70°F to +125°F
(+21°C to +52°C)

Expected receiver
on-duty life using
fresh battery at
various temper-
atures----- +50°F--1 day;
+70°F--20 days;
+125°F--30 days

*The BA 1030/u mercury battery does not have the protruding positive contact of alkaline and zinc carbon batteries. Because of this (a) always carefully check polarity of a mercury battery when installing, (b) rotate the mercury battery two full turns within battery compartment after inserting it, and (c) always assure the receiver's contacts are making proper contact by conducting a checkout of any receiver being used with a mercury battery.

FIRING DEVICE, DEMOLITION: M142, MULTIPURPOSE (PRESSURE, PULL, PRESSURE RELEASE, OR TENSION RELEASE TYPE)



Type Classification:

S (LCCA) Mar 77.

Use:

The M142 is a mechanical firing device intended for use with anti-personnel mines and when setting up boobytraps using demolition charges. It provides in a single item a simple means of mechanical initiation of a boobytrap

by pressure, pull, pressure release, or tension release.

Description:

a. The basic component of the device is a mechanical switch designed for mechanical actuation (to initiate the explosive) by pressure, pull, pressure release or tension release. In addition, to its four mode capability, the M142 can be used to ignite either a

blasting cap (as in other firing devices) or a time blasting fuse for setting a short delay type boobytrap. The device is weather sealed and will also function under water.

b. The firing device consists of a number of different components to facilitate operation in four modes. These components which make up firing device are:

(1) The switch that incorporates two pivot pins, a sear plate, a spring and a firing pin. A safety pin is also incorporated in the switch to prevent accidental initiation. It is positioned in front of the firing pin and is only removed after the desired operating mode is set up.

(2) A tripwire--50 feet of copper wire wound on a cardboard spool. An olive drab coat of paint over the wire prevents it from accidentally unwinding and aids concealment. It is used in the tension release mode and in the pull mode.

(3) A tension release attachment--special formed stainless steel wire that has a spring type action. In the tension release mode the attachment holds the tripwire under tension that, in turn, maintains the firing device in a constant armed position. Actuation is initiated when the taut tripwire is cut which permits the sear plate to release the firing pin.

(4) A coupling body--a cylindrical plastic assembly that contains the explosive initiating element, an M42 primer, but no blasting cap. (The cap must be installed by the user.)

(5) An Instruction Sheet giving abbreviated setup instructions is provided with each device.

(6) Fasteners--a set of nails and screws, for securing the switch are included with each device.

c. The olive drab plastic switch and coupling body are unpainted. They are unmarked except for a yellow band painted on the coupling body. The brass safety pin and steel pivot pins are unpainted.

d. The M142 firing device components, including the instruction sheet, screws and nails are packed in a cylindrical metal container 3-1/8 in. diameter and 1-1/4 in. high. Fifty-six containers are packed in four M19A1 ammunition boxes (14 per box) which are in turn packed in a wirebound wooden box.

Functioning:

a. The switch contains a spring loaded firing pin held in position by a moveable sear plate that can be set to release the firing pin in any one of the four operating modes.

(1) The operating mode is determined by selective removal of one of the two pivot pins in the switch which permits the sear plate to rotate about the other pivot pin. When both pins are in place the sear plate is locked in position. The two pivot pins, the round head pivot pin and square head pivot pin are of different diameters and are not interchangeable.

(2) When the switch is set for pull or pressure, (removal of the square headed pin) a pull of 7 lb min or a pressure of 25 lb min makes the sear plate pivot on the round-headed pin, releasing the spring loaded firing pin.

(3) When the switch is set for pressure (by removal of the round-

headed pin) the sear plate is held down by a load of at least 2 pounds. Removal of the 2-pound load makes the sear plate pivot on the square-headed pin, releasing the spring loaded firing pin.

(4) When the switch is set for tension release (by removal of the round-headed pin) the sear plate is held under tension by a taut tripwire. Cutting of the tripwire makes the sear plate pivot on the square-headed pin, releasing the spring loaded firing pin.

b. The coupling body is interchangeable with the standard coupling base in functioning attached blasting caps and, in addition, has the alternate capability of lighting a time blasting fuse. The coupling body has another advantage over the standard coupling base in that it is not necessary to crimp the blasting cap to attach it.

Tabulated Data:

Actuating force:

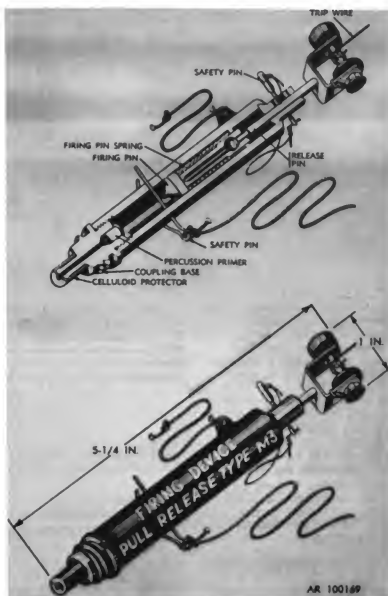
Pressure-----25 pounds or more
Pull-----7 pounds or more
Pressure release--2 pounds or more to set, but not more than 150 pounds

Tension release-----Release of tension
Model-----M142
Weight-----1.2 oz
Length-----4.0 in.
Width-----1.6 in.
Height-----1.1 in.
Material-----Plastic, steel, brass and stainless steel
Primer-----M42
Metal Container:
Dimensions-----Approx 3-1/8 od x 1-5/8 ht
Color-----Olive drab with white lettering

Shipping and Storage Data:

Quantity-distance class-1.4
Storage compatibility group-----B
DOT shipping classification-----Class C
DOT designation-----EXPLOSIVE RELEASE DEVICE
DODIC-----ML03
NSN-----1375-01-040-1526
Drawing-----9296865
Packing-----56 devices packed in 4 boxes each containing 14 firing devices

FIRING DEVICE, DEMOLITION: M3, PULL RELEASE TYPE

Type Classification:

Std A AMCTCM 6384, dtd 1968.

Use:

This firing device is a mechanical device designed for actuation by either an increase (pull) or decrease (release) of the tension of a

taut tripwire and is intended for use with anti-personnel mine M3, or in setting up boobytraps with mines or demolition charges.

Description:

The firing device consists of a head, body, coupling base, firing pin, release pin, safety pin, and winch assembly. The head, which is

crimped to the body, acts as a guide for the release pin. The body contains a spring-loaded firing pin, in which the knob end of the release pin is installed. The coupling base, which screws into the body, contains the primer. The outer end of the coupling base is threaded to fit mine activators and Demolition Charge capwells and has a nipple. A blasting cap may be assembled to the nipple.

The outer end of the firing pin is slotted longitudinally to form four jaws, and grooved internally to receive a knob on the inner end of the release pin. The slotted end of the firing pin passes through a cylindrical opening in the body. It is held in this position by the knob of the release pin when the release pin is in its normal axial position and the safety pin is in place. The safety pin passes through an elongated opening in the head and a hole in the release pin. A small cotter pin, which passes through a hole in the end of the safety pin, prevents accidental movement of the safety pin during shipment. The safety pin when in position, prevents forward or backward movement of the release pin (beyond the slight movement permitted by the elongated slot in the head), thus preventing release of the firing pin. The winch consists of a bracket, spool with a knurled knob, and a pawl, and is attached to the outer end of the release pin.

A positive safety pin, one leg of which passes through a hole in the body between the firing pin and the primer, prevents the firing pin from striking the primer should the firing pin be accidentally released. The other leg of the safety pin is bent around the body, to keep it in place during shipment and handling. An anchor cord (12 inches long), attached to the eyelet on the body, is used to anchor the firing device firmly during installation.

Functioning:

a. Pull Operation. A direct pull of 6 to 10 pounds on the tripwire causes the release pin to be pulled outward until the jaw end of the firing pin passes beyond the constricted opening in the body. In this position, the jaws spread, thereby releasing the firing pin from the knob of the release pin. The jaws then close, releasing the firing pin which, driven by its spring, fires the primer.

b. Tension-Release Operation. Release of tension, such as cutting or detaching the trip wire, permits the release pin and spring-loaded firing pin from the release pin. The released firing pin, driven by its spring, fires the primer.

Tabulated Data:

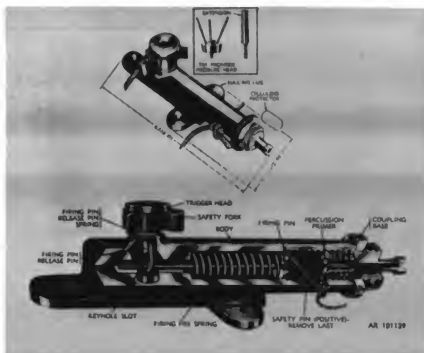
Material-----	Zinc die casting alloy
Color-----	Olive drab w/yel-low markings
Weight-----	Not available
Dimensions:	
Length-----	5-1/4 in.
Diameter-----	1 in.
Explosive charge (filler)-----	Primer mixture
Method of actuation-----	Pull or release of tripwire

Shipping and Storage Data:

Quantity-distance class-----	1.4
Storage compatibility group-----	B
DOT shipping classification-----	Class C
DOT designation-----	PERCUSSION FUZES
DODIC-----	M629
Drawing-----	73-G-87/8837267
Packaging-----	5 devices and 2 80-ft spools of tripwire per pkg, 5 pkgs per inner pkg, 6 inner pkgs (150 devices and 60 spools) per wooden box.
Packing box:	
Weight (w/contents)-----	49.9 lb
Dimensions-----	15-3/8 in. x 11-3/8 in. x 10-3/4 in.
Cube-----	1.18 cu ft

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 FM 5-31
 FM 20-32
 SC 1340/98 IL

**Type Classification:**

C&T, T MSRS 11756003.

Use:

Firing Devices M1 and M1A1, Pressure Type, are pressure-activated devices used to detonate boobytraps and mines.

Description:

The firing device consists of a head, case, and coupling base. The case that contains the firing mechanism has three lugs, each with a hole for use in anchoring the device. The firing mechanism consists of a spring-loaded firing pin held in the cocked position by a firing pin release pin, which is attached to the pressure cap. This is accomplished by a keyhole-shaped opening in the trigger pin. The smaller part of this opening fits into a groove in the firing pin (cocked position); the larger part of the opening permits the free movement of the firing pin upon release. The head, an integral part of the case, contains the firing pin release pin mechanism, which terminates in a pressure cap. A tapped hole in the center of the pressure cap is provided for use of an extension. The coupling

base, which screws into the case, contains the primer. A removable fork, located under the pressure cap, prevents movement of the firing pin release pin. The safety pin, which passes through a hole in the case between the firing pin and the primer of the coupling base, prevents the firing pin from striking the primer should the firing pin be accidentally released.

Functioning:

A pressure of 20 pounds on the pressure cap compresses the firing pin release pin spring and pushes the release spring downward. When the enlarged portion of the keyhole-shaped opening in the release pin is in the line with the spindle, the firing pin is released. The spring-loaded firing pin then fires the primer. The flame from the primer ignites the blasting cap which, in turn, detonates the charge.

Tabulated Data:

Housing material-----	Metal
Color-----	Olive drab w/yel-low markings
Weight-----	0.228 lbs
Dimensions:	
Length-----	4-1/2 in.
Diameter-----	1/2 in.

Method of actuation-----Pressure
 Filler-----Primer mix

Shipping and Storage Data:

Quantity-distance class-----1.4
 Storage compatibility group----B
 DOT shipping classification----Class C
 DOT designation-----PERCUSSION FUZES
 DODIC-----M626
 Drawing:
 M1-----73-9-70
 M1A1-----73-9-70-1
 Packaging*-----5 per box, 50
 boxes (250
 devices) per
 wooden box
 Packing box:
 Weight (w/contents)-----80 lb

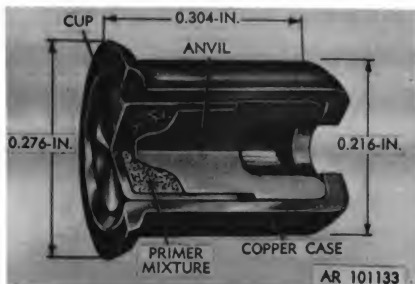
Dimensions-----27-1/4 in. x
 12-3/4 in. x
 10-1/4 in.
 Cube-----2.06 cu ft

*This pack is for Firing Device, Demolition Pressure Type M1A1. The M1 is packed 30 per cardboard box, 30 boxes per wooden box. The total weight is 78 lbs.

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL

PRIMER, PERCUSSION: CAP, M2

Type Classification:

Std OTCM 36841, dtd 10 July 1958.

Use:

Percussion Primer M2 is a component of a coupling base. It is issued separately for re-priming firing devices used with practice mines and boobytraps.

Description:

This primer consists of a vented copper housing fitted with an open cup containing primer mixture and an anvil. The housing is designed for pressfitting in the chamber of the coupling base.

Functioning:

When the primer is struck by a firing pin, the anvil strikes the primer mixture which ignites and emits a small but intense flame.

Tabulated Data:

Housing material-----Copper
 Dimensions:
 Length-----0.304 in.
 Diameter-----0.216 in.

Filler-----Primer mixture
 Method of actuation-----Percussion

Shipping and Storage Data:

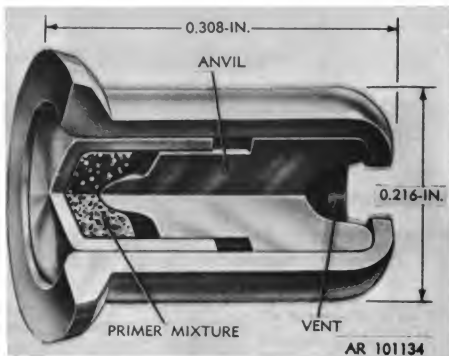
Quantity-distance class-----1.4
 Storage compatibility group-----B
 DOT shipping classification-----Explosive C
 DOT designation-----SMALL ARMS PRIMER—
 HANDLE CAREFULLY
 DODIC-----M180
 Drawing-----B4760-1 ENG
 Packaging-----100 per cardboard
 box, 50 boxes
 (5000 primers)
 per wooden box
 Packing box:
 Weight (w/contents)-----24 lb
 Dimensions-----18-3/8 in. x
 9-3/4 in. x
 7-1/2 in.
 Cube-----0.8 cu ft

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 SC 1340-98 IL

THIS PAGE INTENTIONALLY LEFT BLANK

PRIMER, PERCUSSION: CAP, M27



Type Classification:

Std A OTCM 36841, dtd 10 July 1958.

Use:

The Percussion Cap Primer M27 is a component of a coupling base. It is issued separately for repriming firing devices used with practice mines and boobytraps.

Description:

This primer, similar in construction to Percussion Primer M2, consists of a vented copper housing containing a cup of primer mixture and an anvil. The housing is designed for press fitting in the chamber of the coupling base.

Functioning:

When the primer is struck by a firing pin, the anvil strikes the primer mixture which ignites and emits a small but intense flame.

Tabulated Data:

Housing material-----	Copper
Dimensions:	
Length-----	0.308 in.
Diameter-----	0.216 in.
Filler-----	Primer mixture
Method of actuation-----	Percussion

Shipping and Storage Data:

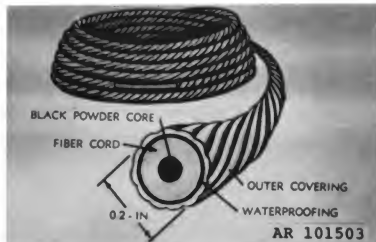
Quantity-distance class-----	1.4
Storage compatibility group----	8
DOT shipping classification----	Explosive C
DOT designation-----	SMALL ARMS PRIMERS-- HANDLE CAREFULLY
DODIC-----	M810
Drawing-----	883781C
Packaging-----	As required
Packing box-----	N/A

References:

SC 1340-98 IL
TM 9-1375-213-12
TM 9-1375-213-34

THIS PAGE INTENTIONALLY LEFT BLANK

FUSE, BLASTING, TIME: (SAFETY FUSE)

Type Classification:

Std B, OTCM 36841, dtd 1958.

Use:

Time blasting fuse (safety fuse) is used in military demolitions to ignite nonelectric blasting caps, above ground or underwater. The fuse is designed to permit the operator to ignite it and reach cover before detonation occurs.

Description:

Time blasting fuse consists of a waterproofed fiber cord with a core of black powder. The outer surface of the cord is corrugated, and is usually orange in color.

NOTE

Because of its corrugated surface, safety fuse does NOT form a waterproof seal when a blasting cap is crimped onto it. Sealing compound must be used to waterproof the installation.

Functioning:

On ignition, the flame travels through the core of black powder at a uniform rate towards

the blasting cap and detonating it on contact. The burning rate varies between rolls, and sometimes within a single roll, from approximately 30 seconds per foot to 45 seconds or more. The burning rate may be affected by climatic conditions, and it increases significantly underwater.

Tabulated Data:

Container material-----	Fiber
Color-----	Usually orange
Dimensions:	
Length-----	50 ft coil
Diameter-----	0.2 in.
Filler-----	Black powder
Method of actuation-----	Flame or fuse igniter

Shipping and Storage Data:

Quantity-distance class-----	1.4
Storage compatibility group----	5
DOT shipping classification----	Explosive C
DOT designation-----	SAFETY FUSE
DODIC-----	M670
Specification-----	MIL-F-20412, MIL-E-15160
Packaging-----	50 ft per coil, 2 coils per package, 5 packages per metal can, 8 cans per wooden box (4000 ft)

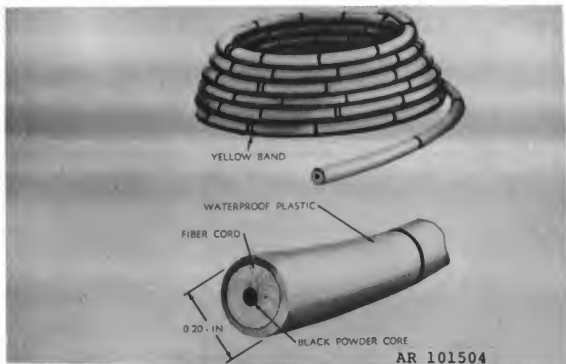
Packing box:

Weight (w/contents)-----93.6 lb
 Dimensions-----30 in. x 14-5/8 in.
 x 14-5/8 in.
 Cube-----3.9 cu ft

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL

FUSE, BLASTING: TIME, M700

**Type Classification:**

Std A OTCM 36841, dtd 1958.

Use:

Time Blasting Fuse M700 is used in military demolitions to ignite non-electric blasting caps. The burning rate of the fuse permits the operator to ignite the fuse and reach cover before detonation. This fuse is similar to and interchangeable with standard safety fuse.

Description:

The fuse consists of a continuous delay of black powder, tightly wrapped and inclosed by an inner cover of jute yarn counterwound with cotton yarn, and covered by a thin cover of bitumen which in turn is covered on the outside by an extruded plastic sheath. The fuse is olive drab with a yellow single band 1/4 inches wide every 18 inches and a double yellow band every 90 inches. The burning rate is 36 to 44 seconds per foot.

Functioning:

When the fuse is ignited, the flame travels through the core of black powder towards the blasting cap and detonates it on contact. The burning rate may be affected by humidity, temperature and if used under water. Under artic

conditions, the plastic covering may become brittle and crack easily.

Tabulated Data:

Covering material-----	Fiber cord
Color-----	Olive drab w/yel-low markings
Dimensions:	
Length-----	50 ft coil
Diameter-----	0.2 inches
Filler-----	Black powder
Method of actuation-----	Flame or fuse igniter

Shipping and Storage Data:

Quantity-distance class-----	1.4
Storage compatibility group-----	5
DOT shipping classification-----	Explosive C
DOT designation-----	SAFETY FUSE
DODIC-----	M670
Specification-----	MIL-F-45144
Packaging-----	50 ft per coil, 2 coils per pkg, 5 pkg per metal can, 8 cans (4000 ft) per wooden box

Packing box:

Weight (w/contents)-----	107 lb
Dimensions-----	30-1/2 in. x 15-5/16 in. x 17-7/32 in.

TM 43-0001-38

References:

TM 9-1375-213-12

TM 9-1375-213-34

FM 5-25

SC 1340/98 IL

FUSE, BLASTING TIME, INERT

Type Classification:

Std A OTCM 36841, dtd 1958.

Use:

This inert fuse is used for demonstration and for training in demolition work requiring time blasting fuse.

Description:

The fuse consists of a continuous inert mix simulating the black powder core of the live fuse. It is tightly wrapped and inclosed by an inner cover of jute yarn counterwound with cotton yarn and covered by a thin coat of bitumen which in turn is covered on the outside by an extruded plastic sheath. The fuse is blue in color and bears 1/8 in. black marking "INERT" on each end of the 50 foot roll.

Functioning:

This item does not function. Its only purpose is for demonstration and to give the operator the feel and practice in the use of time blasting fuse.

Tabulated Data:

Cover material-----	Plastic
Color-----	Blue w/black markings
Dimensions:	
Length-----	50 ft coil
Diameter-----	0.2 in.
Filler-----	Inert material
Method of actuation-----	None

Shipping and Storage Data:

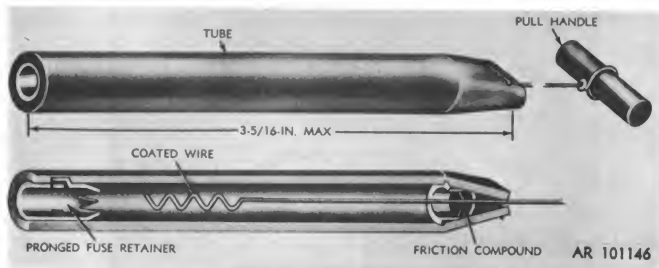
Quantity-distance class-----	N/A
Storage compatibility group-----	N/A
DOT shipping classification-----	N/A
DOT marking-----	None
DODIC-----	M671
Specification-----	MIL-F-45144
Packaging-----	As required
Packing box-----	N/A

References:

FM 5-25
 TM 9-1375-213-12
 TM 9-1375-213-34
 SC 1340/98 IL

THIS PAGE INTENTIONALLY LEFT BLANK

IGNITER, TIME BLASTING FUSE: M1, FRICTION

Type Classification:

Obsolete Material Status Record 11756003.

Use:

Time Blasting Fuse Igniter M1 is a friction-actuated device used to initiate time blasting fuse.

Description:

Igniter M1 consists of a paper tube fitted with a pronged fuse retainer at one end and a pull handle at the other. The pull handle is assembled to a coated wire which extends through a small cup of friction compound in the forward end of the tube.

Functioning:

When the pull handle is pulled, the movement of the wire through the tube ignites the friction compound, which in turn, ignites the time blasting fuse held in the fuse retainer.

Tabulated Data:

Container material-----Paper
Color-----Grey, Brown or
O.D.

Dimensions:

Length-----3-1/3 in.
Diameter-----0.34 in.
Filler-----Friction powder
Method of actuation-----Pull wire handle

Shipping and Storage Data:

Quantity-distance class-----1.4
Storage compatibility group-----S
DOT shipping classification-----Explosive C
DOT designation-----FUSE IGNITERS
DODIC-----M765
Specification-----MIL-I-125
Packaging-----10 cylindrical
cardboard con-
tainers of 250
igniters each
(2500 igniters in
each wooden box)

Packing box:

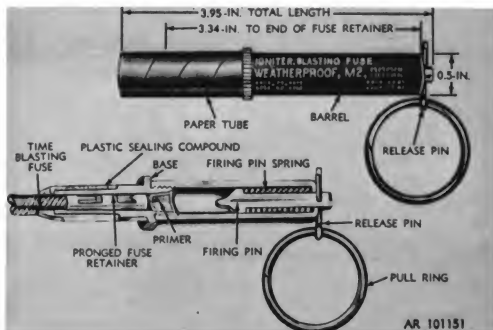
Weight (w/contents)-----As required
Dimensions-----As required
Cube-----As required

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL
DWG 78-0-136

THIS PAGE INTENTIONALLY LEFT BLANK

IGNITER, TIME BLASTING FUSE: M2, WEATHERPROOF

Type Classification:

CAT OTCM 37290, dtd 1959.

Use:

Weatherproof Fuse Igniter M2 is used to ignite time blasting fuse. It is especially useful for adverse weather conditions. It may also be used under water.

Description:

Igniter M2 is a two-piece assembly of a barrel and a coupling base. The barrel is fitted with a firing mechanism which consists of a firing pin, a firing pin spring and a release pin. The release pin is attached to a pull ring. The coupling base contains a percussion primer and a pronged fuse retainer. The base is protected, during shipment and storage, by a removable paper tube. Included in the package is plastic sealing compound.

Functioning:

When the release pin is pulled, the firing pin strikes the percussion cap which then ignites, in turn, the fuse. The igniter will ignite the fuse under all weather conditions, even under water if properly waterproofed.

Tabulated Data:

Body material-----Metal
Color-----Olive drab or black w/yellow markings

Dimensions:
Length-----3.95 in.
Diameter-----0.5 in.

Shipping and Storage Data:

Quantity-distance class-----1.4
Storage compatibility group-----S
DOT shipping classification-----Class C
DOT designation-----FUSE IGNITERS
DODIC-----M766
Drawing-----8796313
Packaging-----5/carton, 30 cartons (150 igniters) per wooden box

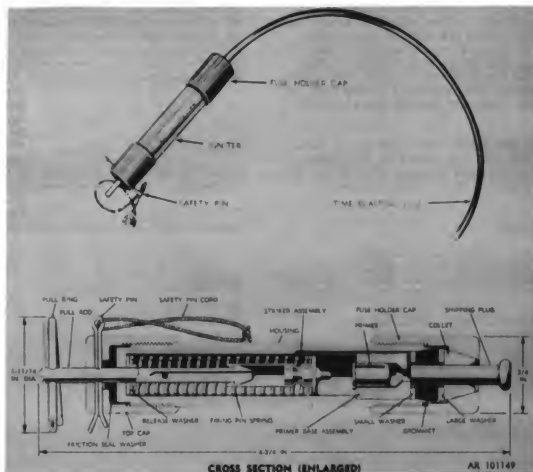
Packing box:
Weight (w/contents)-----As required
Dimensions-----As required
Cube-----As required

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL
MIL-I-394

THIS PAGE INTENTIONALLY LEFT BLANK

IGNITER, TIME BLASTING FUSE: M60, WEATHERPROOF

**Type Classification:**

Std OTCM 37290 dtd 1959.

Use:

The weatherproof time blasting fuse igniter M60 is a pull-type assembly and is used to initiate time blasting fuse. It may be used under all weather conditions and even underwater. A watertight seal is formed only with the smooth-surfaced time blasting fuse M700.

Description:

The igniter consists of three major assemblies: a firing mechanism, a fuse holder and a primer base.

The firing mechanism has a housing with a threaded cap on one end. A firing pin, pull rod,

release washer, and firing-pin spring are situated inside the housing. One end of the pull rod protrudes through the top cap and accepts the pull-ring and safety pin. The pull rod has a venting passage which is opened only during firing when the pull rod is drawn out of the igniter body. A rubber friction seal washer, located between the top cap and the housing, seals the forward end of the housing. The fuse holder is assembled to the base.

The fuse holder assembly consists of a threaded cap with a split, tapered collet inside. A tapered grommet is fitted inside the collet. The shipping plug fits in the cap and is held in place by the grommet and the collet. The rubber grommet also seals the fuse end of the igniter.

The primer base assembly, located inside the housing, consists of a base and a percussion primer.

Functioning:

After the fuse is inserted in the igniter and secured, the safety cotter pin is removed. A 10 to 30 pound pull on the pull ring brings the spring-loaded firing pin back to the release washer, which spreads the firing pin's jaws. This releases the firing pin from the knobbed end of the pull rod. Once released, the firing pin is driven by the compressed spring into the primer, which fires and ignites the adjacent fuse.

High pressure gasses generated by the burning primer and fuse are vented to the atmosphere through the vent passage, eliminating a buildup of pressure which could rupture the igniter.

Tabulated Data:

Body-----Nylon
 Material-----Metal
 Color-----Olive drab w/yellow markings
 Dimensions:
 Length-----4.8 in.
 Diameter-----1.2 in.
 Filler-----Primer mixture
 Method of actuation-----Pull rod

Shipping and Storage Data:

Quantity-distance class-----1.4
 Storage compatibility group-----S
 DOT shipping classification-----Class C
 DOT designation-----FUSE IGNITERS
 DODIC-----M766
 Drawing-----8822497
 Packaging-----5 igniters per
 paperboard box
 one box per
 barrier bag, 6
 bags (300 igni-
 ters) per wooden
 box
 Weight (w/contents)-----36.5 lb
 Dimensions-----17-9/16 in. x
 10-11/16 in. x
 19-17/32 in.
 Cube-----2.04 cu ft

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL
 MIL-I-3948

CHAPTER 3
ELECTRICAL BLASTING EQUIPMENT

THIS PAGE INTENTIONALLY LEFT BLANK

BLASTING MACHINE M32/M34



ARDED-0275

Type Classification:

M34-Std MSR-12156009.

M32-Std B AMTC 8605, dtd Aug 1971.

Use:

These almost identical small, lightweight blasting machines are designed to replace the larger, heavier machines. The M32 is capable of initiating 10 M6 blasting caps, the M34 is capable of initiating 50 M6 blasting caps. These machines are capable of firing their rated number of blasting caps via a 500-foot length of WD-1 cable.

Description:

The impact-resistant plastic housing completely seals the machines against sand, dust,

dirt, mud and even total immersion in three feet of water. The terminals, spring-loaded Signal Corps type, allow rapid and positive connection of the firing lead conductors. These machines derive their power from an alternator using a capacitor discharge circuit.

Functioning:

These machines use a small alternator which is gear driven by the handle-actuated plunger. Electrical output from the alternator is rectified and fed into capacitors. When sufficient energy is available in the capacitors the internal switching circuit discharges the electrical energy to the output terminals, and thus to the blasting circuit. If there is no blasting circuit attached to the terminals, this energy will be discharged through an internal bypass circuit.

Tabulated Data:

Machine Blasting M32

Dimensions (handle depressed):

Length-----2-1/2 in.
Width-----1-1/8 in.
Height-----4-1/8 in.
Weight-----11 oz

Electrical output (min)
(as required by spec)-----1.5 amps into
a 48-ohm load
for 1.5 mil sec

Machine Blasting M34

Dimensions (handle depressed):

Length-----1-1/4 in.
Width-----2-5/8 in.
Height-----5-1/4 in.
Weight-----13 oz

Electrical output (min) (as
required by spec)-----1.5 amps into a
150-ohm load for
1.5 mil sec

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL
SC 1375-95-CL-P02

BLASTING MACHINE, 10-CAP (DIXON) (MOST RECENT MODEL OF THIS TYPE)

Type Classification:

Commercial

Use:

Blasting machines provide the electric current necessary to initiate electric blasting caps. The 10-cap machine is one of the most often used and derives its power directly from a shunt-wound DC generator.

Description (10-Cap):

This machine is a large, hand-held, metal-cased, rounded edge box with a removable twist handle and two screw type terminals on top. Each machine has a brass nameplate containing pertinent data and a leather strap for ease in handling.

Functioning:

The electric output of the Dixon machine is much higher than older machines, and it has a built-in safety circuit. Twisting the handle of the 10-cap machine gear drives a shunt wound DC generator. No current reaches the output terminals unless the machine has been actuated

with enough force to produce sufficient energy to fire all ten caps in a series circuit.

Tabulated Data:

Specification-----	MIL-B-60410
Case-----	Metal
Color-----	Olive drab
Dimensions (handle not included):	
Height-----	6-1/8 in.
Width-----	4-5/8 in.
Depth-----	3-5/8 in.
Weight (total)-----	6 lb
Electrical output (min as required by spec)-----	1.5 amps into a 35-ohm load for 10 milsec
Twist angle of handle-----	150 deg

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL
 SC 1375-95-CL-P02

THIS PAGE INTENTIONALLY LEFT BLANK

BLASTING MACHINE, 10-CAP FIDELITY TYPE OR WHITE RODGERS TYPE



Use:

Blasting machines provide the electric necessary to initiate electric blasting caps.

Description (10-Cap):

This machine is a large hand-held metal-case, rounded edge box with a removable twist handle and two screwtype terminals on top. Each machine has a brass nameplate containing pertinent data and a leather strap for ease in handling.

This older 10-cap machine is known as the Fidelity-type machine since it was primarily manufactured by Fidelity Electric Company.

Functioning:

Twisting the handle of the 10-cap machine gear drives a shunt wound DC generator. No current reaches the output terminals until the end of the twist-stroke when a switch is closed. This

assures that the generator is at a high level of output before the output is put into the blasting circuit.

Tabulated Data:

Specification-----	WB-411
Dimensions (handle not inserted):	
Height-----	5-5/8 in.
Width-----	4-1/8 in.
Depth-----	3-5/8 in.
Weight (total)-----	4-1/2 lb
Electrical output (min)-----	1.5 amps into a 32-ohm load for 10 mll sec
Twist angle of handle-----	150 deg

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL
SC 1375-95-CL-P02

THIS PAGE INTENTIONALLY LEFT BLANK

BLASTING MACHINE, 50-CAP (MOST RECENTLY ISSUED TYPE)



AR 101963

Use:

This blasting machine provides the electric current necessary to initiate 50 electric blasting caps.

Description (50-Cap):

This blasting machine is a large wooden cased box with a handle-actuated plunger and two screw-type terminals on top. Each machine has nameplate containing pertinent data. A small indicator lamp is located on the top surface between the terminals.

Functioning:

When the handle actuates the plunger the gear drives a shunt wound DC generator. This blasting machine contains a built-in safety circuit. The safety circuit does not allow any current to reach the output terminals until the machine's plunger has been actuated with sufficient energy

for maximum output. An indicator lamp lights when the machine is delivering electrical energy to its output terminals. This assures that the generator is at a high level of output before output is switched into the blasting circuit.

Tabulated Data:Dimensions (Plunger depressed):

Height-----15-1/2 in.

Width-----8 in.

Depth-----6-1/2 in.

Weight-----20 lb

Electrical output (min)-----1.5 amps into
a 240 ohm load
for 10 milsec

Stroke length of plunger-----8 in.

MSN-----1375-00-141-
9495

Specification-----PA-PD-2753

References:

TM 9-1375-213-12

TM 9-1375-213-34

FM 5-25

SC 1340/98 IL

SB 700-20

BLASTING MACHINE, 30-CAP (GENERATOR TYPE)

Use:

This blasting machine provides the electric current necessary to initiate 30 electric blasting caps.

Description (30-Cap):

This blasting machine is a large rectangular wooden box with a handle-actuated plunger and two screwtype terminals on top. Each machine has nameplate containing pertinent data.

Functioning:

When the handle actuates the plunger, the gear drives a shunt wound DC Generator. No current reaches the output terminal until the end of the plunger drive closes a switch. This assures that the generator is at a high

level of output before output is switched into the blasting circuit.

Tabulated Data:

Specification-----	WB-411
Dimensions (Plunger depressed):	
Height-----	16 in.
Width-----	8 in.
Depth-----	8 in.
Weight-----	Up to 25 lb
Electrical output (min) (as required by spec)-----	1.5 amps into a 90-ohm load for 10 milsec

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SB 700-20
 SC 1340/98 IL

THIS PAGE INTENTIONALLY LEFT BLANK

BLASTING MACHINE, 50-CAP (GENERATOR TYPE)



AR 101960

Use:

This blasting machine provides the electric current necessary to initiate 50 electric blasting caps.

Description (50-Cap):

This blasting machine is a large rectangular wooden box with a handle-actuated plunger and two screwtype terminals on top. Each machine has nameplate containing pertinent data.

Functioning:

When the handle actuates the plunger, the gear drives a shunt wound DC Generator. No current reaches the output terminal until the end of the plunger drive stroke closes a switch. This assures that the generator is at a high level of output before output is switched into the blasting circuit.

Tabulated Data:

Specification-----	WB-411
Dimensions (Plunger depressed):	
Height-----	17 in.
Width-----	8 in.
Depth-----	8 in.
Weight-----	Up to 28 lb
Electrical output (min) (as required by spec)-----	1.5 amps into a 160-ohm load for 10 milsec
Stroke length of plunger-----	8 in.

References:

TM 9-1375-213-12
TM 9-1375-213-34
SB 700-20

THIS PAGE INTENTIONALLY LEFT BLANK

BLASTING MACHINE, 100-CAP (GENERATOR TYPE)

Use:

This blasting machine provides the electric current necessary to initiate 100 electric blasting caps.

Description (100-Cap):

This blasting machine is a large rectangular wooden box with a handle-actuated plunger and two screwtype terminals on top. Each machine has nameplate containing pertinent data.

Functioning:

When the handle actuates the plunger, the gear drives a shunt wound DC Generator. No current reaches the output terminal until the end of the plunger drive closes a switch. This assures that the generator is at a high level of output before output is switched into the blasting circuit.

Tabulated Data:Dimensions (Plunger depressed):

Height-----18 in.

Width-----8 in.

Depth-----10 in.

Weight-----Up to 32 lb

Electrical output (min)

(as required by spec)-----1.5 amps into a
160-ohm load for
10 milsec

Stroke length of plunger-----5 to 8 in.

References:

TM 9-1375-213-12

TM 9-1375-213-34

SB 700-20

THIS PAGE INTENTIONALLY LEFT BLANK

TEST SET, BLASTING CAP: M51

Type Classification:

Std A AMCTC-4638, dtd June 1966.

Use:

This test set was developed as a replacement for the blasting galvanometer to test continuity of electrical blasting circuits.

NOTE

The M51 will replace the Blasting Galvanometer on an attrition basis only.

Description:

The M51 is a hand-held, plastic-bodied rectangular prismoid with a protruding squeeze handle. There are two screw type contact terminals, one on either side of the instrument and a test light near one corner of the instrument body. Test set M51 contains a magneto-

type electrical impulse generator. The test set is replacing the blasting galvanometer.

Functioning:

When the handle of the test set is depressed, a minute amount of current flows from the impulse generator, through the blasting circuit, and through a switching circuit. If the blasting circuit is continuous and has less than 200 ohms resistance, the current can flow through the blasting circuit and actuate the switching circuit, which lights the indicator lamp. If the blasting circuit is open or contains a high resistance, no current (or a very small amount) flows and the switching circuit is not actuated.

Tabulated Data:

Dimensions (handle up):

Length-----	4-3/4 in.
Width-----	1-15/16 in.
Height-----	3-5/8 in.
Weight-----	15-1/2 oz
Specification-----	MIL-T-48134A

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 1L
SC 1375-95-CL-P02

GALVANOMETER, BLASTING



Type Classification:

Not available.

Use:

This small instrument checks the continuity and determines the approximate resistance of electrical blasting circuits.

Description:

This is a small rectangular, box-shaped device with a meter on one face and two protruding, round electrical contacts on top. The galvanometer is one of ONLY two instruments generally authorized for checking out blasting circuits. It is furnished in a leather shoulder carrying case with a window for reading the meter.

Functioning:

This blasting galvanometer works by sending a minute amount of current from a silver chloride battery through the blasting circuit and through a D'Arsonnal meter. The meter's needle responds

in proportion to the amount of resistance the current encounters in the blasting circuit.

Tabulated Data:

Specification-----WB-411

Dimensions (approx dimensions vary with manufacturer):

Length-----4-1/4 in.

Width-----3-1/4 in.

Depth-----1-7/8 in.

Weight (less battery)-----16 oz

Scale range:

All models-----1 to 25

Some models-----0 to ∞ ohms

No. of batteries-----One

Type of batteries authorized:

Normal temperatures----- (0 to +125°F)-
low temperatures
(-20 to 0°F)

Silver chloride drycell.

MIL-B-131368-----Type BA-245/u
Silver chloride
dry cell MIL-B-
131368, Type
BA-2245/u

References :

TM 9-1375-213-12

TM 9-1375-213-34

FM 5-25

SC 1340/98 1L

SC 1375-95-CL-P02

BATTERY, STANDARD GALVANOMETER TYPE BA-245/u



Use:

This standard galvanometer battery is used in the blasting galvanometer.

Description:

This Battery is small and cylindrical with two screw terminals on top. Markings will vary with manufacturer. This is a special silver-chloride dry cell battery used only in Blasting Galvanometers.

Functioning:

The galvanometer battery is a special type that allows only a very small current to flow even when shorted.

NOTE

This battery will deteriorate slowly at average room temperature, therefore, it should be stored in a refrigerator if it is to be unused for a month or more.

Tabulated Data:

0.9 volt cylindrical shape, 2-terminal stud and nut type.

Diameter-----3/4 in.

Length-----2-3/8 in.

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL
 SC 1375-95-CL-P02

THIS PAGE INTENTIONALLY LEFT BLANK

BATTERY, LOW TEMPERATURE GALVANOMETER

Use:

This battery is used in the blasting galvanometer in a low temperature environment only.

Description:

This battery is small and cylindrical with two screw terminals on top. Markings will vary with manufacturer. This is a special silver-chloride dry cell battery formulated for low temperature.

Functioning:

The galvanometer battery is a special type that allows only a very small current to flow even when shorted.

NOTE

Prolonged exposure to temperatures no higher than ordinary room temperature will greatly shorten the shelf and useful life of this special low-temperature galvanometer battery. Therefore, this battery should be removed from the galvanometer and stored in a refrigerator anytime the galvanometer is not in use.

Tabulated Data:

0.9 volt cylindrical shape, 2-terminal stud and nut type, corrosion-resistant.

Diameter-----3/4 in.
Length-----2-3/8 in.

TM 43-0001-38

References:

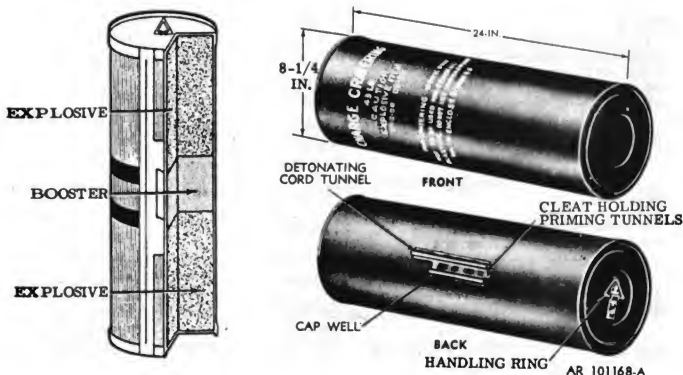
TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL
SC 1375-95-CL-P02

CHAPTER 4

CHARGES

THIS PAGE INTENTIONALLY LEFT BLANK

CHARGE, DEMOLITION; CRATERING, 43-POUND

Type Classification:

Std OTCM 36841; dtd 1958.

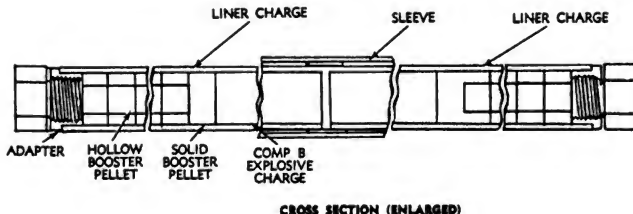
Use:

The 43-pound cratering demolition charge is the standard cratering charge. Because of the large amount of explosive in convenient forms, it may also be used in destroying buildings and fortifications and overturning bridge abutments. The ammonium nitrate based explosive has a relatively low detonating velocity and is therefore unsuitable for cutting and breaching operations. However, the low velocity blast effect gives it a pushing or heaving effect which makes it suited for cratering and ditching operations.

Description:

The 43-pound cratering demolition charge is a watertight cylindrical metal container with approximately 30 pounds of an ammonium nitrate based explosive and a TNT booster of approximately 10 pounds in the center portion next to the priming tunnels. Two priming tunnels are attached to the outside of the container, midway between the ends. One tunnel serves as a cap well for priming the demolition charge with an electric or nonelectric military blasting cap. The other tunnel is for priming with detonating cord passed through the tunnel and knotted at the end. A cleat between the tunnels secures time blasting fuse, electrical firing wire or detonating cord in place. A

CHARGE, EXPLOSIVE, SPRINGING (FOR ROD, EARTH, BLAST DRIVEN, M13)



AR 101139

Type Classification:

Obsolete - Material Status Record 11756003.

Use:

The charge, sometimes referred to as a rigid Linear Demolition Charge, is a separate item issued with the Kit, Rod, Earth, Blast Driven Set: M13. This charge is used for enlarging the hole produced by the Rod, Propelling M13. It produces a hole in the ground of about 12 inches in diameter. This hole is suitable for emplacing cratering charges in order to create obstacles. These holes can also be used for emplacing Classes 6, 7, and 9 telephone poles. The Kit is not a replacement for the earth auger; rather, it is a supplement to the earth auger in that it is used in situations which prohibit the use of the auger.

Description:

This item consists of two charge tube assemblies; each approximately 3/4 inches in diameter and three feet long. Each tube

contains approximately 0.6 lb Comp B and nine RDX booster pellets one of which is solid and the remaining eight are hollow. The hollow end contains a threaded adapter capable of accepting a base coupling. The item includes a sleeve which enables the operator to join two tubes together to form a springing charge assembly of approximately 6 feet in length.

Functioning:

After the Earth Rod, Blast Driven: M13 has been extracted, the springing charge is inserted and readied for functioning with a suitable primer (blasting cap, electric, nonelectric, delay detonator, etc.). The primer initiates the booster which, in turn, detonates the main Comp B charge. The resulting explosion enlarges the hole in the ground.

Tabulated Data:

Container material-----	Plastic
Color-----	Natural phenolic
Weight-----	0.9 lb/per loading assembly

Dimensions:

Length-----3 ft approx./per
loading as-
sembly
Diameter-----3/4 in. approx
Filler-----Comp B (Main
charge)
Booster-----RDX pellets
Method of actuation-----Blasting cap,
std firing
device, or
detonators

DOT designation-----HIGH EXPLOSIVE
DODIC-----M440
Drawing-----82-13-23
Packaging-----Two 3 ft sections
+ 1 connecting
sleeve, each
packed 20 per
wooden box

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-2
DOT shipping classification----Class A

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL

CHARGE, PROPELLING, EARTH ROD: M12


Type Classification:

Std A OTCM 36841, dtd 1958.

Use:

This charge is a separate item of issue, and is a component of Demolition Kit, Earth Rod, Blast Driven Set No. 1. It is used for propelling a steel rod into the ground 6 feet; depending upon the type of soil present. After the rod is extracted from the ground, the hole is enlarged with charge, explosive, springing, for Rod, Earth, Blast, Driven, M13 (linear demolition charge). The holes, about 12 inches in diameter, can be used for emplacing cratering explosives, log obstacles, and classes 6, 7, and 9 telephone poles. The kit is not a replacement for the earth auger. Rather, it is used in situations which prohibit the use of the earth auger.

Description:

This charge has an outer cylindrical metal container holding 270 grams Smokeless Powder

M2 and M44 Primer consisting of a two-inch long x 1/2 inch diameter plastic container. The plastic container holds approximately 3-1/2 grams Glazed Black Powder and 12 inches of Time Blasting Fuse which is permanently attached. The primer is centrally located in the propelling charge.

Functioning:

The item, after being assembled with the primer, is placed into the bottom of the firing chamber of the Earth Rod. Then mud or clay is firmly packed onto the charge to fill the firing chamber. The Time Blasting Fuse is protruding through the mud. The fuse is initiated with a fuse igniter or other convenient means (the operator takes cover). The burning fuse ignites the black powder in the primer. The black powder ignites the propellant. The burning propellant powder drives the rod down into the ground.

Tabulated Data:

Container material-----Metal
Color-----Olive drab

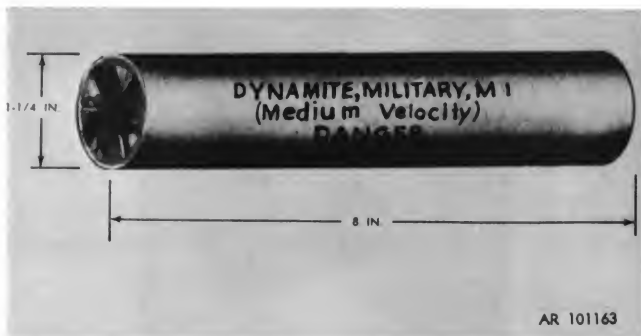
Weight-----3/4 lb
 Dimensions:
 Length-----2-3/4 in. x 3-
 13/16 in. dia
 Filler-----Smokless powder
 Primer (M44)-----Black powder
 Method of actuation-----Time Blasting
 fuse lighter
 igniter
 Quantity-distance class-----1.3
 Storage compatibility group-----C
 DOT shipping classifications-----Class B
 DOT designation-----PROPELLANT EXPLO-
 SIVES, CLASS B
 DODIC-----M405
 Drawing-----71-9-237
 Packaging-----Wooden box con-
 tains 20 charges
 placed between
 separator and
 2 cartons each
 containing 10
 primers

Packing box-----8796522
 Weight-----2 lb, 5 oz
 Dimensions:
 Length-----16.4 in. x 2 in.
 dia

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL

DYNAMITE: MILITARY, M1



AR 101163

Type Classification:

Std OTCM 37119, dtd 1959.

Use:

Military dynamite M1 is a medium-velocity blasting explosive used in military construction, quarrying and demolition.

Description:

Military dynamite consists of a mixture of RDX, petroleum based binder and guar gum packed in cylindrical paraffin coated paper cartridges. Each cartridge is 1-1/4 inches in diameter and 8 inches long.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

Tabulated Data:

Container material-----	Paper
Color-----	Tan w/black markings
Dimensions:	
Length-----	8 in.
Diameter-----	1-1/4 in.
Filler -----	RDX, binder and guar gum
Method of actuation-----	Blasting cap or detonating cord

Shipping and Storage Data:

Quantity-distance class-----	1.1
Storage compatibility group-----	D-2
DOT shipping classification-----	Class A
DOT designation-----	HIGH EXPLOSIVES-- DANGEROUS
DODIC-----	MS91
Drawing-----	MIL-D-45413
Packaging-----	50 cartridges per waterproof bag, 2 bags (100 cartridges) per wooden box

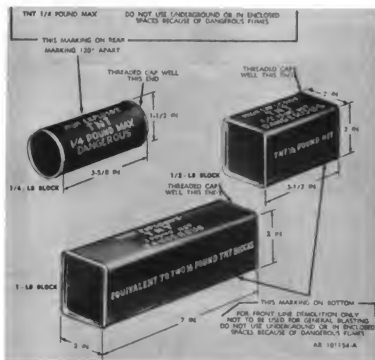
Packing Box:

Weight-----62 lb
Dimensions-----19-7/8 in. x
 11-7/8 in. x
 11-7/8 in.
Cube-----1.57 cu ft

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL

TNT BLOCK DEMOLITION CHARGES
CHARGE, DEMOLITION: BLOCK (1/4-, 1/2-, 1-POUND) TNT



Type Classification:

Std OTCM 36841, dtd 1958.
 Std AMCTCM 6039, dtd 1968.

Use:

TNT block demolition charges are standard demolition charges and are used for all types of demolition work. However, the 1/4-pound charge is used primarily for training purposes.

Description:

TNT block demolition charges are issued in three sizes. The 1/4-pound block demolition charge is in a cylindrical waterproof cardboard container, and the 1/2-pound and 1-pound block demolition charges are in rectangular waterproof cardboard containers. All three have metal ends with a threaded cap well in one end. TNT (trinitrotoluene) charges have a high detonating velocity and thus TNT is particularly well suited to cutting or breaching hard surfaced materials.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

Tabulated Data:

Container material-----	Cardboard
Color-----	Olive drab w/yellow markings
Weight-----	1/4 lb, 1/2 lb, or 1 lb
Dimensions:	
1/4-lb block-----	3 5/8 in. (length) x 1-1/2 (diameter)
1/2-lb block-----	3 1/2 in. x 2 in. x 2 in.
1-lb block-----	7 in. x 2 in. x 2 in.
Filler-----	TNT

Method of actuation-----Military blasting
caps or detonat-
ing cord

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-1
DOT shipping classification-----Class A
DOT designation-----HIGH EXPLOSIVE--
DANGEROUS

DDIC:

1/4-1b block-----M030
1/2-block-----M031
1-1b block-----M032

Ordnance Part Number:

1/4-1b block-----8797113
1/2-1b block-----8885245
1-1b block-----8885249

Packaging:*

1/4-1b block-----192 blocks w/4
bags of 12 (ea)
priming adapters
per wooden box**
1/2-1b block-----96 blocks w/2
bags of 12 (ea)
priming adapters
per wooden box**
1-1b block-----48 blocks w/tag
of 12 priming
adapters per
wooden box**

Packing box:*

Weight (w/contents):

1/4-1b block-----84 lb
1/2- & 1-1b blocks-----71.5 lb

Dimensions (Outside):

1/4-1b blocks-----18-1/8 in. x
16-5/8 in. x
9-7/8 in.
1/2- & 1-1b blocks-----22-1/2 in. x
11-1/4 in. x
9-5/8 in.

Cube:

1/4-1b blocks-----1.7 cu ft
1/2- & 1-1b blocks-----1.4 cu ft

*See SC 1340/98 IL for other packs.

**Priming Adapter M1A4, Ordnance Part Number
8800913, is also available as a separate item
of issue.

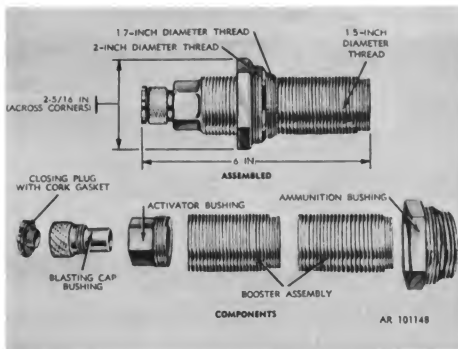
Limitations:

TNT block demolition charges cannot be molded
and are difficult to use on an irregular shaped
target. TNT is not recommended for use in closed
spaces because its explosion produces explosive
gases.

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL

DESTRUCTOR, EXPLOSIVE: UNIVERSAL, M10

Type Classification:

Std OTCM 36841, dtd 1958.

Use:

Universal Destructor M10 is used primarily to convert high explosive bombs and artillery projectiles into improvised demolition charges. It is also used to destroy deteriorated and abandoned ammunition. The destructor is designed to accommodate any ammunition with 1.5-, 1.7-, or 2-inch fuze wells.

Description:

Destructor M10 is essentially an adapter-bosser assembly consisting of an ammunition bushing, a booster assembly, an activator bushing, and a blasting cap bushing. The ammunition bushing is threaded externally to fit 1.7- or 2-inch diameter fuze wells. Internally, it is threaded to mate with the booster assembly, which consists of two booster cups filled with tetryl pellets. The booster cups, threaded together to form an assembly, are attached at the forward end to an activator bushing. The tetryl pellets in the forward cup have center holes designed to accommodate a blasting cap or activator. The 1.5-inch external thread which accepts the activator can also be threaded

into a 1.5-inch fuze cavity. The activator bushing, threaded to accept an M1 activator, is assembled at the forward end to a blasting cap bushing which will accept any standard firing device. During shipment and storage, the blasting cap bushing is sealed with a closing plug and cork gasket.

Functioning:

On activation by blasting cap or mine activator, the tetryl pellets in the booster explode. The resulting detonating wave initiates the explosive filled target.

Tabulated Data:

Container material-----	Rolled sheet steel
Color-----	Unpainted w/black markings
Weight-----	9 oz
Dimensions:	
Length-----	6 in. x 2 in. dia
Filler*-----	Tetryl
Method of actuation-----	Military blasting cap or mine activator

Shipping and Storage Data:

Quantity-distance class-----1.1

Storage compatibility group----D-2
 DOT shipping classification----Class A
 DOT designation-----BOOSTERS (EX-
 PLOSIVE)--
 HANDLE CARE-
 FULLY
 DODIC-----M241
 Drawing-----9216189
 Packaging-----One destructor
 per fiber con-
 tainer; 50
 containers per
 wooden box

Packaging Box:

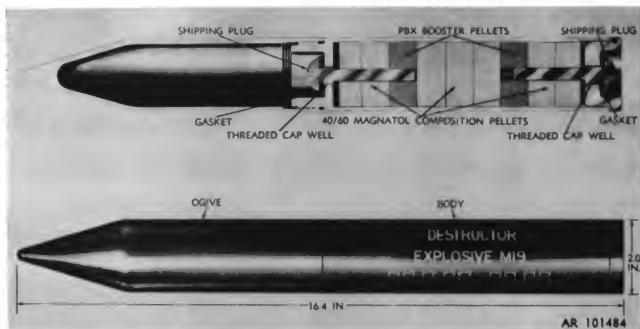
Weight (w/contents)-----64 lb
 Dimensions-----16-7/8 in. x
 15-1/16 in. x
 16-1/8 in.
 Cube-----2.3 cu ft

*Tetryl has been replaced by Comp A-3 for produc-
 tion after 7 Dec. 1973.

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 1L
 SC 1375-95-CL-P02

DESTRUCTOR, EXPLOSIVE: M19

Type Classification:

Obsolete Material Status Report 11756003.

Use:

This device is particularly suitable for use as a dust initiator in an enclosed space (box-car or unventilated warehouse) containing powdered dust such as coal, flour, soap, aluminum, or magnesium powders.

Description:

This destructor consists of a cylindrical, explosive-filled body with a removable ogive. Threaded cap wells at each end of the body are designed to accept coupling bases of firing devices or priming adapters. The explosive filler is a special material capable of detonating a high concentration of combustible dust, such as that found in a granary.

Functioning:

The M19 destructor was specially designed to initiate dust explosions. The primed item is

inserted into a barrel of flour or other material capable of making a flammable dust or mist. Upon initiation with a suitable primer, the PBX initiates the magnatol. The resulting explosion of PBX and magnatol causes the dust to be thrown into the air and suspended there long enough for the burning magnesium and aluminum powder in the magnatol to ignite the dust. The dust explosion causes such an increase in gas pressure that the structure usually is demolished.

Tabulated Data:

Container material-----	Metal
Color-----	Olive drab w/yel-low markings
Weight (approx)-----	2-1/2 lb
Dimensions:	
Length-----	16.4 in. long x 2 in. dia
Filler-----	PBX and 40/60 magnatol
Method of actuation-----	Military blasting cap

Shipping and Storage Data:

Quantity-distance class-----1.1

Storage compatibility group---D-2
 DOT shipping classification---Class A
 DOT designation-----EXPLOSIVE MINES
 DODIC-----M235
 Drawing-----8846587
 Packaging-----One destructor
 per fiber con-
 tainer, 6 con-
 tainers per
 wooden box

Packing Box:

Weight (w/contents)-----26.5 lb

Dimensions-----19-31/32 in. x
 10-13/16 in. x
 6-3/4 in.
 Cube-----0.8 cu ft

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL
 MIL-C-20331
 71-9-237

CHARGE, DEMOLITION: SHAPED, M2A3 AND M2A4 15-POUND

Type Classification:

Std AMCTCM 5026, dtd 1967.

Use:

Shaped charges are primarily used to bore holes in earth, metal, masonry, concrete, and paved and unpaved roads. This particular shaped charge has been especially designed for use against reinforced concrete.

Description:

Shaped demolition charges used in military demolition operations are tapered top cylindrical blocks of high explosives having a lined, conical cavity in one end which directs the cone liner material into a narrow jet for penetrating metal, concrete, earth or other materials. Maximum penetration is obtained when the charge is exploded at a specific distance from the target, called standoff.

A standoff distance is provided by a fiber sleeve supporting the charge. A carrying handle is attached to each charge. The two 15 pound shaped charges described here are identical except for the explosive content:

a. Charge, Demolition: Shaped (15-Pound) M2A3. Shaped demolition charge M2A3 contains approximately 9-1/2 pounds of comp B with a 50-50 pentolite booster weighing approximately 2 pounds in a moisture-resistant molded fiber container. Older models are completely pentolite loaded. A cylindrical fiber base slips on end of charge to provide a standoff distance. A cone of glass is used as a cavity liner in this charge.

b. Charge, Demolition: Shaped (15-Pound) M2A4. Shaped demolition charge M2A4 is less sensitive to gunfire than charge M2A3. Charge M2A4 is identical to charge M2A3 in performance, the 50-50 pentolite booster has been replaced by 50 grams of comp A3. Also, the main charge

of comp B has been increased to maintain same total weight as charge M2A3.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave. The shape of the liner focuses the shock wave to a point. This concentrated shock wave converts the liner into a high speed jet of liner material which penetrates the target.

Tabulated Data:

Container material-----	Molded fiber w/ glass liner
Color-----	Olive drab w/yel- low markings
Weight-----	15 lb
Dimensions (w/standoff):	
Length-----	15 in.
Diameter-----	7 in.
Filler:	
Shaped charge-----	Comp B or pento- lite (older M2A3's only)
Booster:	
M2A3-----	50/50 pentolite
M2A4-----	50 grams Comp A3
Method of actuation-----	Military blasting Cap

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-2
DOT shipping classification-----A
DOT designation-----HIGH EXPLOSIVES-
DANGEROUS
DODIC-----M420
Item Drawing-----8861565
Packaging-----3 charge/barrier
bag 1 bag/
wooden box

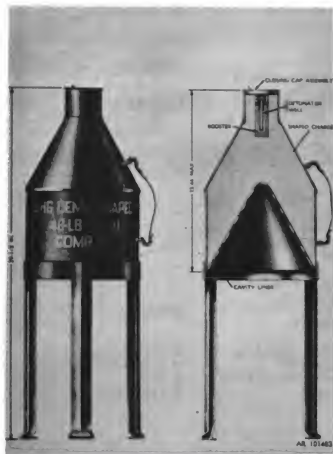
Packing Box:

Drawing-----8861208
Weight (w/contents)-----45 lb
Dimensions-----As required
Cube-----As required

References :

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 IL

CHARGE, DEMOLITION: SHAPED, M3 AND M3A1 40-POUND

Type Classification:

Std AMCTCM 5027, dtd 1967.

Use:

Shaped charges are primarily used to bore holes in earth, metal, masonry, concrete, and paved and unpaved roads. This particular shaped charge is especially useful for use against thick reinforced concrete pavements laid on dense high-strength base courses.

Description:

Shaped demolition charges used in military demolition operations are tapered top cylindrical blocks of high explosive having a lined, conical cavity in one end which directs the cone liner

material into a narrow jet for penetrating metal, concrete, earth or other materials. Maximum penetration is obtained when the charge is exploded at a specific distance from the target, called standoff. A standoff is provided by a metal tripod for supporting this charge. A carrying handle is attached to each charge. The two 40 pound shaped charges described here are identical except for the explosive content:

a. Charge, Demolition: Shaped (40-Pound) M3. Shaped demolition M3 charge contains approximately 28.3 pounds of comp B with 1.7-pound booster of 50-50 pentolite in a metal container. The cavity liner is made of metal. A metal tripod for obtaining a standoff distance is also provided.

b. Charge, Demolition: Shaped (40-Pound) M3A1. Shaped demolition charge M3A1 is less

sensitive to gunfire than charge M3. Charge M3A1 is identical to charge M3 in performance, except that the 50-50 pentolite booster has been replaced by a booster of approximately 50 grams of comp A3. Also the main charge of Comp B has been increased to maintain the same total weight as charge M3.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave. The shape of the liner forces the shock wave to a point. This concentrated shock wave converts the liner into a high speed jet of liner material which penetrates the target.

Tabulated Data:

Container material-----Metal
 Color-----Olive drab w/yel-
 low markings
 Weight-----40 lb
 Dimensions (w/o standoff):
 Length-----15-1/2 in.
 Diameter-----9-1/2 in.
 Filler:
 Shaped charge-----Comp B
 Booster:
 M3-----50/50 pentolite
 M3A1-----Comp A3
 Method of actuation-----Military blasting
 cap

Shipping and Storage Data:

Quantity-distance class-----1.1
 Storage compatibility group----D-2
 DOT shipping classification----A
 DOT designation-----HIGH EXPLOSIVES--
 DANGEROUS
 DODIC-----M421
 Drawing-----8858390
 Packaging-----One charge and one
 standoff frame
 per wooden box
 Packing box:
 Weight (w/contents)-----65 lb
 Dimensions-----20-9/16 in. x
 11/16 in. x
 13-9/32 in.
 Cube-----1.8 cu ft

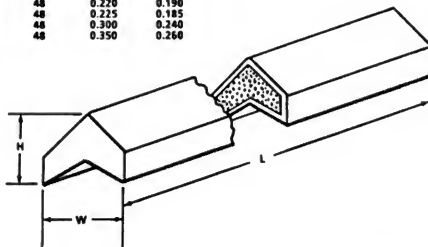
References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL

CHARGE, DEMOLITION, SHAPED, LINEAR, FLEXIBLE: 20, 30,
40, 60, 75 GRAINS PER FOOT

LEGEND

GRAINS PER FOOT	L (LENGTH) (IN.)	W (WIDTH) (IN.)	H (HEIGHT) (IN.)
20	48	0.190	0.160
30	48	0.220	0.190
40	48	0.225	0.185
60	48	0.300	0.240
75	48	0.350	0.260



ARD 2629

Type Classification:

Std MSR 01816004.

Use:

This family of "Flexilinear" shaped charges (FLSC's) is used by Explosive Ordnance Disposal (EOD) personnel to remotely low order initiate (blow apart rather than detonate) or cut open explosive ordnance devices in order to render them safe to handle or transport. The FLSC can be cut to provide the length of charge required for the job at hand.

Description:

The FLSC is a long, thin metal-sheathed rod of explosive with a special cross-section shape (see illustration) that concentrates the

explosive's energy in a line to provide a cutting edge. The lead alloy sheath provides a great deal of flexibility so that the charge can be bent around a round target item as small as two inches in diameter. The ends of the charge sheath are capped with a soft rubbery elastomeric flexible epoxy to provide a moisture seal until the charge is cut to size for use. Cutting is done by scoring the sheath with a knife and breaking it along the score. The different charges all come in four foot lengths and differ in cross section dimensions and the amount of explosive load. They are designated by the amount of explosive per foot contained.

Functioning:

After the proper charge is cut to the size specified in the appropriate Render Safe Procedure (RSP),

it is primed with a military blasting cap and secured to (or adjacent to) the spot specified in the RSP. Initiation of the blasting cap detonates the charge's explosive load. The V-shaped notch in the metal sheath and the charge itself concentrates a large proportion of the detonation's energy into an intense "cutting edge" detonation wave. This concentrated detonation wave allows application of a large amount of energy to a small area of the target.

Tabulated Data:

Dimensions:

20 grains per foot:
48 in. x 0.190 in. x 0.160 in.

30 grains per foot:
48 in. x 0.220 in. x 0.190 in.

40 grains per foot:
48 in. x 0.255 in. x 0.185 in.

60 grains per foot:
48 in. x 0.300 in. x 0.240 in.

75 grains per foot:
48 in. x 0.350 in. x 0.260 in.

Filler:

Explosive charge----CH-6
Initiator Required--Military
 blasting cap

Shipping and Storage Data:

DODIC-----ML09, ML10, ML11,
ML12, ML13

Quantity-distance
class-----1.1

Storage compatibility
group-----D

DOT shipping
classification--Class A - High
Explosive

DOT designation---HIGH EXPLOSIVE-
DANGEROUS

NSN-----1375-01-083-2820,
1375-01-082-9919,
1375-01-082-9920,
1375-01-083-2822,
1375-01-082-9921

Drawing-----9331218,
9331219,
9331220,
9331221,
9331222

Packaging:
Quantity required-----6

Shipping Container:

Container material---Wood
Color-----Natural

Package Gross Wt.,
lbs. (calc)-----12.8, 13.6,
14.0, 14.6,
15.5

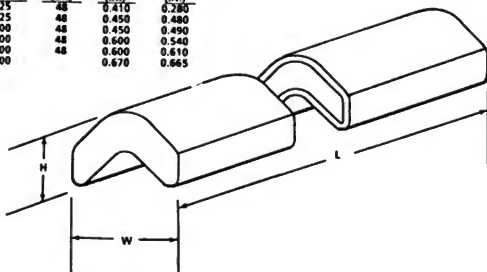
Dimensions-----50½ x 5½ x 2-3/50
Cube-----0.33 cu ft (calc.)

Reference:

SC 1375-95-CL-A03

CHARGE, DEMOLITION, SHAPED, LINEAR, FLEXIBLE 125, 225,
300, 400, 500 AND 600 GRAINS PER FOOT

LEGEND			
GRAINS PER FOOT	L (LENGTH) (IN.)	W (WIDTH) (IN.)	H (HEIGHT) (IN.)
125	48	0.410	0.280
225	48	0.450	0.480
300	48	0.450	0.490
400	48	0.500	0.540
500	48	0.600	0.610
600		0.670	0.665



ARD 2630

Type Classification:

Std MSR 01816004.

Use:

This family of "Flexilinear" shaped charges (FLSC's) is used by Explosive Ordnance Disposal (EOD) personnel to remotely low order initiate (blow apart rather than detonate) or cut open explosive ordnance devices in order to render them safe to handle or transport. The FLSC can be cut to provide the length of charge required for the job at hand.

Description:

The FLSC is a long, thin metal-sheathed rod of explosive with a special cross-section shape (see illustration) that concentrates the explosive's energy in a line to provide a cutting

edge. The lead alloy sheath provides a great deal of flexibility so the charge can be bent around a round target item as small as two inches in diameter. The ends of the charge sheath are capped with a soft rubbery elastomeric flexible epoxy to provide a moisture seal until the charge is cut to size for use. Cutting is done by scoring the sheath with a knife and breaking it along the score. The different charges all come in four foot lengths and differ in cross section dimensions and the amount of explosive load. They are designated by the amount of explosive per foot contained.

Functioning:

After the proper charge is cut to the size specified in the appropriate Render Safe Procedure (RSP), it is primed with a military blasting cap

and secured to (or adjacent to) the spot specified in the RSP. Initiation of the blasting cap detonates the charge's explosive load. The V-shaped notch in the metal sheath and the charge itself concentrates a large proportion of the detonation's energy into an intense "cutting-edge" detonation wave. This concentrated detonation wave allows application of a large amount of energy to a small area of the target.

Tabulated Data:

Dimensions:

125 grains per foot:
48 in. x 0.410 in. x 0.280 in.
225 grains per foot:
48 in. x 0.450 in. x 0.480 in.
300 grains per foot:
48 in. x 0.450 in. x 0.490 in.
400 grains per foot:
48 in. x 0.600 in. x 0.540 in.
500 grains per foot:
48 in. x 0.600 in. x 0.610 in.
600 grains per foot:
48 in. x 0.670 in. x 0.665 in.

Filler:

Explosive charge---CH-6
Method of
actuation -----Military Blasting
Cap

Shipping and Storage Data:

DODIC---ML14, ML15, ML16, ML17,
ML18, ML19.
Quantity-distance class-1.1
Storage compatibility
group-----D
DOT shipping
classification-----Class A-High
Explosive
DOT designation-----HIGH EXPLOSIVE,
DANGEROUS
NSN-----1375-01-082-9922,
1375-01-082-9923,
1375-01-082-9924,
1375-01-083-6325,
1375-01-082-9925,
1375-01-083-2821.
Drawing-----9331223,
9331224,
9331225,
9331226,
9331227,
9331228.
Packaging:
Quantity Required for 125, 225 and 300
Grains/Ft-----5
Quantity Required for 400, 500 and 600
Grains/Ft-----3

Shipping Container:

Container material-----Wood
Color-----Natural

Package Gross Wt., lbs (calc)--15.4
20.9
21.2
18.1
19.9
20.1

Reference:

SC 1375-95-CL-A03

CHARGE, DEMOLITION: BLOCK M118
(FLEX-X SHEET EXPLOSIVE)



Type Classification:

Std AMCTM 2818, dtd 1964.

Use:

Demolition charge M118 is designed for use as a cutting charge, and especially for use against steel targets. The sheets of explosive may be quickly applied to irregular and curved surfaces, and are easily cut to any desired dimensions. Demolition charge M118 may be used for small breaching charges but should not be used as a bulk explosive charge because of its high cost.

Description:

Demolition charge M118 (commonly called Flex-x or Sheet Explosive) consists of four 1/2-pound sheets of flexible explosive packed in plastic envelope. *Each sheet is approximately 3 in. x 12 in. x 1/4 in. thick. Included in each box of 20 charges M118 is a package of 80 blasting cap

holders M8. *Each sheet of explosive has a pressure-sensitive adhesive tape attached to one surface. A piece of release paper protects the adhesive surface. Its relative effectiveness is 1.14.

NOTE

Exact explosive contained in charges M118 will vary with manufacturer. At present, some manufacturers use PETN as the basis explosive while others use RDX. Charges of future manufacture may include still other explosives.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

*Blasting cap holder M8 is also available as a separate item of issue.

Tabulated Data:

Covering material-----Plastic (Mylar)
 Color-----Olive drab w/yel-
 low and black
 markings
 Weight-----2-1/4 lb
 Dimension (max)-----12-1/2 in. x 3-1/4
 in. x 1-1/4 in.
 Filler-----PETN or RDX
 Method of actuation-----Military blasting
 caps or detonat-
 ing cord

Shipping and Storage Data:

Quantity-distance class-----1.1
 Storage compatibility group---D-2
 DOT shipping classification---Class A
 DOT designation-----HIGH EXPLOSIVES--
 DANGEROUS
 DODIC-----MO24

Drawing-----9204247
 Packaging-----20 charges w/one
 bag of 80 blast-
 ing cap holders
 per wooden box

Packing box:
 Weight (w/contents)-----52.5 lb
 Dimensions-----17-3/4 in. x
 13-1/2 in. x
 8 in.
 Cube-----1.2 cu ft

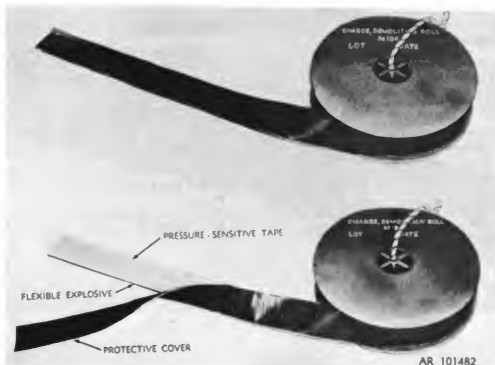
Limitations:

Adhesive tape will not adhere to wet or frozen surfaces. A supplementary adhesive must be used for such applications.

REFERENCES:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1375-95-CL-P02
 SC 1340/98 IL

**CHARGE, DEMOLITION, ROLL: M186
(FLEX-X SHEET EXPLOSIVE)**



AR 101482

Type Classification:

Std AMCTCM 5790, dtd 1968.

Use:

Roll Demolition Charge M186 is used in the same manner as sheet demolition charge M118. Charge M186 is especially adaptable for demolishing targets which require use of flexible explosive in long lengths particularly where several feet are required. It is especially useful in cutting steel, trees and targets of irregular shape. This explosive should not be used as a bulk explosive when others are available for the mission because it is expensive.

Description:

M186 is a rolled up sheet of explosive approximately 3 in. wide x 1/4 in. deep with a layer of foam backed adhesive tape attached. The adhesive is covered with a release paper. Roll demolition charge M186 is identical to charge M118 except that the explosive is in the form of a 50-foot roll on a plastic spool, rather than in sheet form. Each foot of the roll provides approximately 1/2 pound of explosive. It is marked in

order to show how much is left on the roll. Included with each roll are 15 blasting cap holders M8* and a canvas bag with carrying strap. The exact explosive contained in this charge will vary with the manufacturer. Some manufacturers use PETN while others use RDX as the basic explosive. In the future, other explosives may be used in the manufacture of this item. However, its performance will be identical to the charge demolition, M186 described herein.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

Tabulated Data:

Container material-----	Plastic spool, OD color
Color-----	Olive drab w/yellow and black markings

Weight-----25 lb
 Dimensions-----50 ft x 3 in. x
 1/4 in.
 Filler-----PETN or RDX
 Method of actuation-----Military blasting
 caps or detonat-
 ing cord

Packing box:
 Weight (w/contents)-----115 lb
 Dimensions-----19-7/8 in. x
 19-9/16 in. x
 14-1/32 in.
 Cube-----3.8 cu ft

Shipping and Storage Data:

Quantity-distance class-----1.1
 Storage compatibility group-----D-2
 DOT shipping classification-----Class A
 DOT designation-----HIGH EXPLOSIVES--
 DANGEROUS
 DODIC-----M060
 Drawing-----9297231
 Packaging-----One roll w/15
 blasting cap
 holders per
 canvas bag, 3
 bags per wire-
 bound box

Limitations:

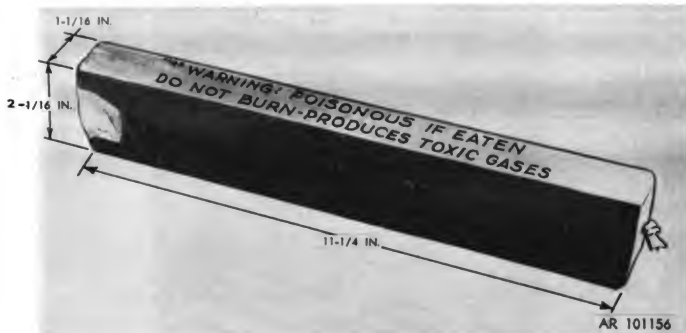
Adhesive tape will not adhere to wet surfaces or frozen surfaces. A supplemental adhesive should be used for such targets.

*Blasting cap holder M8 is also available as a separate item of issue.

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1375-95-CL-P02
 SC 1340/98 IL

CHARGE, DEMOLITION: BLOCK M112

Type Classification:

Std AMCTH 2818, dtd 1964.

Use:

Block demolition charge M112 is plastic explosive and used in the same manner as block demolition charge M5A1. This charge is ideally suited for cutting charges as the adhesive backing allows the charge to be attached to any relatively flat, dry surface above freezing (32°F, 0°C). The explosive may also be cut and/or removed from the mylar wrapper and hand formed as desired to suit the target.

Description:

Charge M112 consists of 1-1/4 pounds of Comp C4 packed in a mylar-film bag with pressure-sensitive adhesive tape on one surface for quick emplacement. The tape is protected by a peelable paper cover. Comp C4 in some block demolition charges is colored dull gray in a clear mylar-film bag. In charges of recent manufacture comp C4 is white and packed in an olive-drab mylar-film bag. Its relative effectiveness is 1.34.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

Tabulated Data:

Covering material-----	Mylar film
Color-----	Gray or olive drab w/yellow markings
Weight-----	1-1/4 lb
Dimensions-----	2-1/16 in. x 1-1/16 in. x 11-1/4 in.
Filler-----	Comp C4
Method of actuation-----	Detonating cord or blasting caps

Shipping and Storage Data:

Quantity-distance class -----	1.1
Storage compatibility group-----	D-2
DOT shipping classification-----	Class A

DOT designation-----HIGH EXPLOSIVES---
 DANGEROUS
 DODIC-----M023
 NSN-----1375-00-724-7040
 Drawing-----9204248
 Packaging-----30 charges per
 wirebound wooden
 box

Packing Box:

Weight (w/contents)-----47 lb
 Dimensions-----13-3/4 in. x 11-
 1/2 in. x 8-19/32
 in.
 Cube-----0.8 cu ft

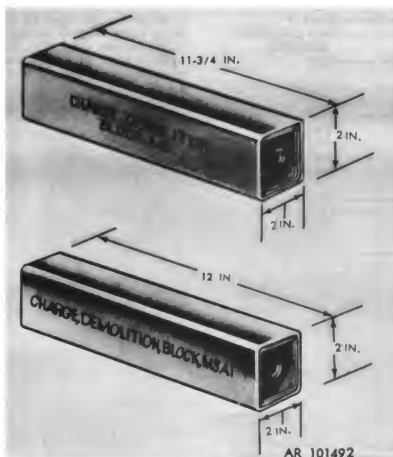
Limitations:

Adhesive tape will not adhere to wet surfaces or frozen surfaces. A supplemental adhesive must be used when applying to wet, frozen or dirty surfaces.

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1375-95-CL-P02
 SC 1340/98 IL

CHARGE, DEMOLITION: BLOCK M5 AND M5A1

Type Classification:

M5A1 - Std B OTCM 2818, dtd 1964.

Use:

Block demolition charge M5 or M5A1 is plastic explosive and is used in almost all types of demolition work, primarily for cutting and breaching. Because of its moldability and high brisance, the explosive is ideally suited for steel cutting charges and for cutting irregular shaped targets. It is insoluble in water and may be used for underwater demolitions.

Description:

Block demolition charge M5 contains comp C3 and the M5A1 contains Comp C4. The charge is encased in a clear plastic container with a threaded cap well in each end (M5). Bulk explosive is obtained by cutting open the plastic container.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

Tabulated Data:

Cover material-----	Plastic
Color-----	White or gray w/ yellow markings
Dimensions-----	2 in. x 2 in. x 11-3/4 in.
Weight-----	2-1/2 lb
Filler:	
M3-----	Comp C3
M5A1-----	Comp C4
Method of actuation-----	Military blasting caps of detonating cord

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group----D-2
DOT shipping classification-----Class A
DOT designation-----HIGH EXPLOSIVE -

DANGEROUS

DODIC-----M038
Drawing:
MS-----82-13-9
MSAL-----8833395
Packaging-----One charge per polyethylene bag,
 24 bags per wooden box

Packing box:
Weight (w/contents)-----75 lb
Dimensions-----17-5/16 in. x 13-5/16 in. x 11-29/32 in.
Cube-----1.6 cu ft


Limitations:

The white color of Comp C4 in block demolition charge M5A1 is difficult to camouflage. Running water will erode Comp C3 if not protected. Below -20°F Comp C3 becomes brittle and above +125°F exudes some oils and becomes buttery. Comp C3 emits gases which will cause sickening headaches.

References :

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1375-95-CL-P02
SC 1340/98 IL

CHARGE, DEMOLITION: BLOCK M3

Type Classification:

Obsolete Material Status Rcord 11756003.

Use:

Comps C2 or C3 are more powerful than TNT and of about the same sensitivity. Because of their plastic nature and high power, these explosives are suitable for cutting steel or irregular shaped targets, since they may be molded to fit the shape of the target and thus can achieve better contact with resulting high demolition efficiency. Being insoluble in water, block demolition charges of Comp C2 or C3 are suitable for underwater demolition, if enclosed in a container or wrapping to prevent erosion by running water.

Description:

Block demolition charge M3 is available in either Comp C2 or C3. It is enclosed in glazed paper which is perforated around the middle for ease in breaking open. The charge does not have a cap well. Comp C2 or C3 is pliable and may be molded at temperatures between -20°F and +125°F.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

Tabulated Data:

Container material-----	Pasteboard
Color-----	Olive drab w/black markings
Weight-----	2-1/4 lb
Dimensions-----	11 in. x 2 in. x 2 in.
Filler-----	Comp C3 or C2
Method of actuation-----	Detonating cord or military blasting cap

Shipping and Storage Data:

Quantity-distance class-----	1.1
Storage compatibility group----	D-2
DOT shipping classification----	Class A

DOT designation-----HIGH EXPLOSIVES—
 DANGEROUS
 DODIC-----M037
 Drawing-----76-1-1260
 Packaging-----8 per haversack;
 2 haversacks
 (16 ea) per
 wooden box
 Packing box:
 Weight (w/contents)-----58.1 lb
 Dimensions-----21-1/8 in. x 14-
 3/8 in. x 7-3/8
 in.
 Cube-----1.82 cu ft

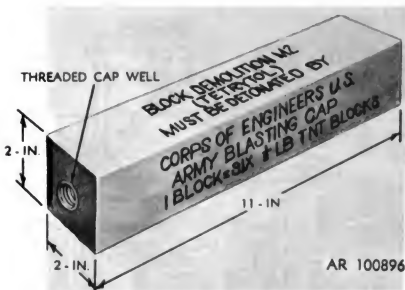
Limitations:

Below -20°F, Comp C2 or C3 becomes brittle
 and above +125°F, exudes some oils and becomes
 buttery. They emit gases which will cause
 sickening headaches.

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL

CHARGE, DEMOLITION: BLOCK M2, TETRYTOL

Type Classification:

Obsolete Material Status Record 11756003.

Use:

Tetrytol is more powerful and more brisant than TNT and is effective as a cutting or breaching charge. It may be used as an alternate to TNT in general demolition work. Its relative effectiveness factor is 1.2.

Description:

This charge is a block of 75-25 tetrytol with a tetryl booster pellet and a threaded metal cap well cast in each end. Each block is wrapped in olive-drab, asphalt-impregnated paper.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved

depends on the placement of the charge in relation to the target.

Tabulated Data:

Container material-----	Asphalt-impregnated paper
Color-----	Olive drab w/yellow markings
Weight-----	2-1/2 lb
Dimensions-----	11 in. x 2 in. x 2 in.
Filler-----	75-25 tetrytol
Method of actuation-----	Detonating cord or blasting cap

Shipping and Storage Data:

Quantity-distance class-----	1.1
Storage compatibility group----	D-2
DOT shipping classification----	Class A
DOT designation-----	HIGH EXPLOSIVES—DANGEROUS
DODIC-----	MO36
Drawing-----	75-14-410C
Packaging-----	8 per haversack, 2 haversacks (16 charges per wooden box)

Packing box:

Weight (w/contents)-----62.1 lb
 Dimensions-----21-1/8 in. x
 14-3/8 in. x
 7-3/8 in.
 Cube-----1.28 cu ft

Limitations:

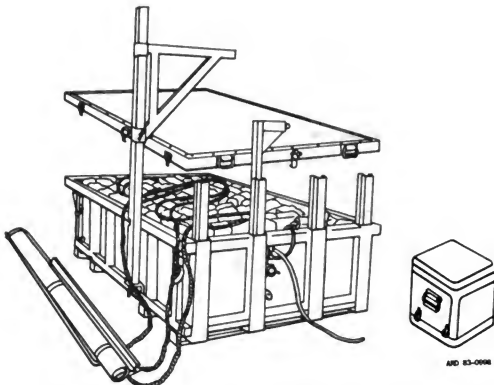
Tetrytol block charges must have the pure tetryl booster to insure detonation and can

therefore be broken into only two pieces. The tetryl booster is more sensitive to impact than tetrytol or TNT and may be detonated by small arms fire. Block demolition charge M2 of tetrytol is brittle and shatters easily if dropped or struck.

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL

CHARGE, DEMOLITION, LINEAR, HE, M58, M58A1, M58A2, and M58A3



Type Classification:

Std AMC T 511 (For/U.S. Marine Corps)

Use:

This charge is a mine clearing device used to clear a path for tanks, vehicles, and personnel through minefields or other obstacles.

Description:

The M58 Series charges all consist of a 350 foot sausage-like, flexible explosive charge packed in a special container (pallet) along with a steel towing cable assembly, a nylon arresting cable, and an electrically operated fuze. The charge is designed to be towed out over the target minefield by a rocket motor where it drops onto the ground and is then detonated on command by means of an electrical cable. The charge can be ground launched (wherein it is used as part of the M125 Demolition Kit) launched from a landing craft, or launched from a vehicle-towed trailer.

The major components of the M58 series Charges are

a. **Pallet.** The pallet serves as a protective storage and transportation container. The basic M58, M58A1, and M58A2 are packed in a steel pallet approximately 93 inches long, 53 inches wide, and 24 inches high. The steel pallet has a 3/4 inch plywood cover sheathed in steel sheet. The M58A3 is packed in a plywood pallet approximately 4 feet long, 4 feet wide, and 6 feet high.

b. **Charge.** The M58 series linear demolition charges are approximately 350 feet long and consist of three, 100-foot sections, and one 50 foot section of unit charges. Sections are joined by means of a left and right stop link bolted together. Each section contains a core of 3/4 inch nylon rope and three strands of 100-grain PETN detonating cord. The demolition charge contains five pounds of Comp C-4 per linear foot and is divided into unit charges each consisting of two, 5-1/2 x 1-1/2 x 3-1/2 rectangular pellets weighing approximately 1-1/4 pounds. Each unit is contained in a plastic bag wrapped around the core and secured thereto with filament tape. The exterior of the unit charge is covered with two reverse-direction, knitted nylon sleeves. A sausage effect is obtained by tying the ends of each unit charge with nylon coreless cord. A rocket harness connector is attached to the front and a demolition charge fuze connector to the rear of the demolition charge.

c. **Arresting Cable.** This cable consists of a 205-foot length of 3/4-diameter, three-strand nylon rope with an electrical lead running through the center of each of the three strands. The arresting cable is in the bottom of the pallet.

d. **Fuze.** The M1134 Series Fuzes have a diameter of approximately 1-1/2 inches, an overall length of approximately 4-3/4 inches, and weighs approximately 4 pounds. M1134 Series Fuzes contain six explosive elements—two electro-explosive initiators and four lead cups, two which contact the detonating cord boosters of the line charge and two in the rotor. The rotor is a rotatable metal disc that separates each explosive initiator from the adjacent one. When the fuze is armed by the line charge's arresting cable being pulled taut, cups in the rotatable disc allow exposure of the explosive elements and closing of a switch to connect the electro-explosive devices to the wires in the arresting cable. The M1134 Series Fuzes are also used with the Army's M173 Projected Charge Demolition Kit. One fuze is enclosed in a packing box and is stored and shipped in the pallet.

*See associated items

Differences Between Models:

Although the M58 series charges are identical in performance, it should be noted there are major difference in models. These are:

The M58A1 uses the M1134A1 Fuze which has been fitted with an RF trap making it less susceptible to accidental/premature detonation from radio waves and has had the arming system changed slightly from the original configuration. All M1134 fuzes should be of the "A1" upgraded configuration for use with the M58A1 changes.

The M58A2 and M58A3 utilize the new M1134A1 Fuze.

The M58, M58A1, and M58A2 can be launched from the ground, from a modified M353 trailer or from older model landing craft.

The pallet of the M58A2 has been modified in the following manner; the front end which had been angled is now upright, making the pallet rectangular in shape.

The M58A3 comes packed in a plywood container measuring approximately 4 x 4 x 6 feet high. This taller, narrower configuration is for use in new landing craft.

The M58A2 is being considered for Army use with the trailer mounted launcher.*

Associated Items:

a. Firing Kit, Demolition M1147. This kit contains all the cables, connectors, and a selector switch needed to fire all versions of the M58 charge using a standard Blasting Machine as power source. Any 10-cap, M-32 or M-34 Blasting Machine may be used.

b. Rocket Motor. Various versions of the MK22, 5-inch rocket are used to tow the M58 series linear charges.

c. M125 Demolition Kit. This kit was the first use of the M58 Charge. It consists of an M58 Charge, an M147 Firing Kit, an MK22 Rocket, and a simple launcher rail that attaches to the charge's pallet. It is meant for launching the charge from the ground.

d. M68 Inert Linear Charge. This is an inert, reusable, training version of the M58 Charge. It is loaded with rubber rather than explosive pellets and is equipped with an inert fuze (Model M1147). The M68 is launched with a live rocket motor in the same manner as the M58.

e. Adaptive Line Charge Launcher. This is a steel beam framework that straps onto a standard M353 Trailer. The framework allows securing of the M58 Line Charge pallet and contains an integral hydraulically-erected launcher rail for the towing rocket. With use of components from the M147 Firing Kit, this assembly allows remote erection of the launcher and firing of the rocket and line charge from the towing vehicle without exposing personnel.

armed by a pull of its arming device by the arresting cable becoming taut when the charge is fully deployed. The operator then rotates the firing control switch indicator to the "CHARGE" position and actuates the blasting machine again. This causes detonation of the fuze's electric initiators, the adjacent lead cups, the detonating cord and finally the C-4 pellets. Explosion of the charge clears a path several feet wide through the target minefield.

Tabulated Data:

NOTE

Dimensions and weights are all approximate.

Complete Assembly (M58, M58A1, and M58A2)

Length	93 in (236 cm)
Width	54 in (137 cm)
Height	28 in (71 cm)
Weight	3,000 lb (1 360 Kg)

Complete Assembly (M58A3)

Length	48 in
Width	48 in
Height	72 in
Weight	3,000 lb

Linear Demolition Charges, M58 Series

Length	350 ft (106.7 meters)
Weight (total)	2,042 lb (926 kg)
Weight, Comp C-4 pellet	1.1 4 lb
Number of pellets on line	1 400
Total Explosive Weight	1,750 lb (794 kg)
Electrical power supply	10-cap blasting machine (or M32 or M34)

Shipping and Storage Data

Quantity/distance class	1 1
Storage compatibility group	D
DOT shipping classification	A
DOT designation	Old explosive bomb
	New bursting charge
DDDIC	Army DDDIC not available
NSN	1375-00 008-8895
Drawing	8845322
Packaging	BUSHIPS 1289930

References

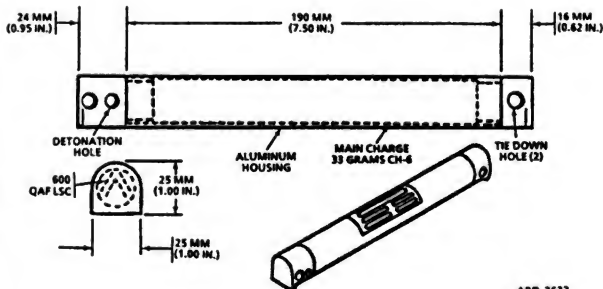
MIL C-46558
USMC Adaptive Line Charge Launch Kit
Manual, July 1981 (w/Change 1)
USMC TM 1375-10-1

Functioning:

Once the demolition charge has been positioned and readied for firing, the operator rotates the M1147 Kit's firing control switch indicator to the "ROCKET" position and hand actuates the 10-cap (or M-34) Blasting Machine smartly. This propels the rocket motor and demolition charge across the selected area. The M1134 fuze is mechanically and electrically

*See associated items

CHARGE, DEMOLITION, EOD, MK 86, MOD 0



ARD 2632

Type Classification:

Std A - MSR 01816004.

Use:

This shaped charge is used in EOD Operations to cut open, render safe to handle or disrupt the functioning of mines or other explosive ordnance devices. It is especially designed for underwater operations and is non-magnetic so that it can be used on a variety of targets.

This charge consists of a short length of flexible linear shaped charge sealed in an aluminum housing which provides the proper standoff for the shaped charge as well as a rigid mount that can be easily attached to the target and hold the initiating/blasting cap in place.

Functioning:

This item is initiated by detonation of a military blasting cap or detonator in its detonating hole (capwell). This detonation causes detonation of the explosive charge in the linear shaped charge which, in turn, produces a higher intensity detonation wave downward which forms into a "cutting edge" jet of energy which cuts or impacts the target to accomplish the desired effect. This charge will cut 0.3 inches (8mm) of mild steel.

Tabulated Data:

Explosive Filler-----	CH 6
Method of Actuation --	Electric or Non-electric blasting cap

Shipping and Storage Data:

Quantity-distance
 class----- 1.1
 Storage compatibility
 group----- D
 DOT shipping
 classification-----CLASS A EXPLOSIVE
 DOT designation-----HIGH EXPLOSIVE -
 DANGEROUS
 DODIC-----M995
 NSN-----1375-01-068-3985

Drawing-----5206201

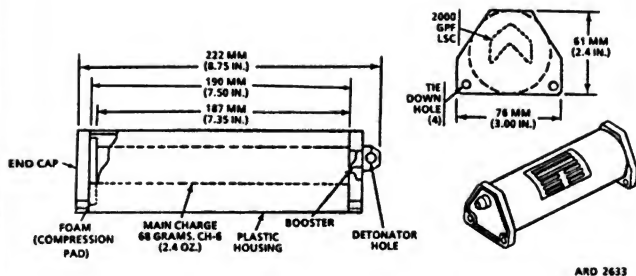
Packing box:

Dimensions-----11 x 5-5/16 x
 6-25/32 in.

References:

SC 1375-95-CL-A03

CHARGE, DEMOLITION, EOD, MK 87, MOD 0



ARD 2633

Type Classification:

Std A - MSR 01816004.

Use:

This shaped charge is used in EOD operations to cut open, render safe to handle, or disrupt the functioning of mines or other explosive ordnance devices. It is especially designed for underwater operations and is non-magnetic so it may be used on a variety of targets.

Description:

This charge consists of a short length of flexible linear shaped charge sealed in a plastic housing which provides the proper standoff for the

shaped charge as well as a rigid mount that can be easily attached to the target and hold the initiating detonator/blasting cap in place.

Functioning:

This item is initiated by detonation of a military blasting cap or detonator in its detonator hole (capwell). This detonation causes detonation of the explosive charge in the linear shaped charge which, in turn, produces a higher intensity detonation wave downward which forms into a "cutting edge" jet of energy which cuts or impacts the target to accomplish the desired effect. This charge will cut an inch (25mm) of mild steel.

Tabulated Data:

Explosive Filler-----CH 6
 Method of Actuation--Electric or non-
 electric
 blasting cap

Shipping and Storage Data:

Quantity-distance
 class-----1.1
 Storage compatibility
 group-----D
 DOT shipping
 classification-----CLASS A EXPLOSIVE

DOT designation-----HIGH EXPLOSIVE-
 DANGEROUS
 DODIC-----M996
 NSN-----1375-01-069-6671
 Packaging-----5206202
 Drawing-----5206202

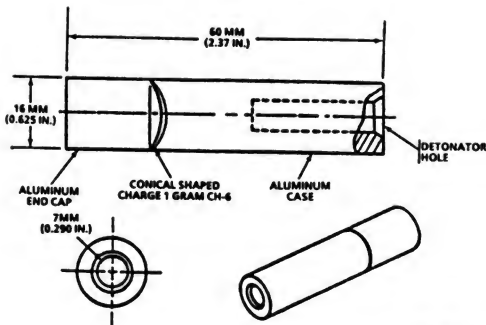
Packing box:

Dimensions-----8.656 ± 0.0624 x
 13.803 x
 17.281 in.

References:

SC 1375-95-CL-A03

CHARGE, DEMOLITION, EOD, MK 88, MOD 0



ARD 2634

Type Classification:

Std A - MSR 0186004.

Use:

This charge is designed for EOD
Render Safe Procedures on munitions.

Description:

This aluminum-cased cylindrical charge contains a small explosive charge formed around a copper cone. A detonator hole (capwell) is in one end of the sealed housing and there is a void in the other end to allow the proper standoff for the shaped charge in the center of the housing.

Functioning:

This shaped charge is initiated by detonation of a military blasting cap in its capwell. The cap's detonation sets off the shaped charge's explosive which, because of the conical indentation, forms a high intensity energy jet downward along the charge's axis. The MK 88 will penetrate half an inch of mild steel.

Tabulated Data:

Explosive Filler-----	CH 6
Method of Actuation-----	Electric or Non-electric Blasting Cap

Shipping and Storage Data:

Quantity-distance
 class-----1.1
 Storage compatibility
 group-----D
 DOT shipping
 classification-----Class A
 Explosive
 DOT designation-----HIGH EXPLOSIVE
 DANGEROUS
 DODIC-----M997
 NSN-----1375-01-068-3894

Drawing-----5206203

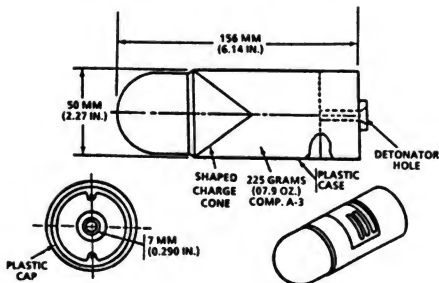
Packing Box:

Dimensions-----11 x 5-5/16 x
 6-25/32 in.

References:

SC 1375-95-CL-A03
 Appendix C.

CHARGE, DEMOLITION, EOD, MK 89, MOD 0



ARD 2635

Type Classification:Use:

This charge is designed for EOD
Render Safe Procedures on munitions.

Description:

This sealed, bullet-shaped, plastic-cased charge contains an explosive charge formed around a plastic case. A detonator hole (capwell) occupies the flat end of the container and there is a void in the rounded end to provide the standoff for the shaped charge.

Functioning:

The copper core of the MK 89 is formed into a slug of molten metal

within the energy jet for added penetrating ability. The concentrated energy jet performs the desired effect on the target. The MK 89 will penetrate five inches of mild steel.

Tabulated Data:

Explosive Filler-----Comp A-3
Method of Actuation----Electric or
Non-electric
Blasting Cap

Shipping and Storage Data:

Quantity-distance
class-----1.1
Storage compatibility
group-----D
DOT shipping classification-----Class A
Explosive
DOT designation-----HIGH EXPLOSIVE-
DANGEROUS

DDIC-----M998
NSN-----1375-01-069-6672
Drawing-----5205204

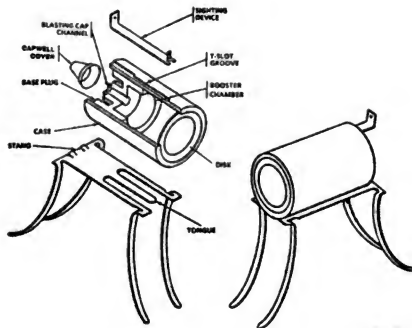
Packing Box:

Dimensions-----8.656± .062 x 13.803
x 17.281 in.

References:

SC 1375-95-CL-A03,
Appendix C.

CUTTERS, POWDER ACTUATED: MK 23 MOD 0 and MK 24 MOD 0 (EXROD)



AND 3521

Type Classification:

MSR 01816004

Use:

These Powder actuated cutters are used by EOD personnel to remotely render safe bombs or projectiles by forceful removal of either the fuze, the fuze baseplate containing the fuze, or by striking the item at a strategic location with an explosively propelled ballistic disc. These devices thus allow the target items to be rendered safe without causing high order detonation.

Description:

These cutters consist of small cylindrical impulse cartridges, specially made bendable metal stands

and sighting devices that connect onto the cartridges. The plastic-cased impulse cartridges each contain a booster and a main explosive charge and a specially shaped metal disc.

Functioning:

The cutter is manually positioned by the operator in accordance with the appropriate Render Safe Procedure using the metal stand and/or tape. A military blasting cap is secured in the blasting cap channel (capwell) by being pushed into the rubber grommet at the base of the channel. Firing of the cap detonates the booster which in turn, detonates the main charge. When the detonator wave strikes the convex metal plate it forms it into a non-molten slug of metal which is moving at hypersonic speed when it strikes the target.

The high impulse of the metal slug at high speed impacts the target. The cutter may be used singly or in groups depending upon the target.

Tabulated Data:

Container material-----Plastic
Color-----Olive Drab

Dimensions:

Length:

MK 23-----4.38 in.

MK 24-----5.75 in.

Diameter:

MK 23-----1.89 in.

MK 24-----2.89 in.

Base Plug Contents:

1-inch cylindrical CH-6

Booster encased in an aluminum cap and a blasting cap well.

70/30 OCTOL main charge:

MK 23-----4.0 oz

MK 24-----1.1 lb

Method of actuation---Military
Blasting Cap

Quantity-distance

class-----1.1

Storage compatibility

group-----D

DOT shipping

classification-----Class A

Explosive

DOT designation-----HIGH EXPLOSIVE-
DANGEROUS

Shipping and Storage Data:

DODIC-----ML04, ML05

Specification-----WS19935E

WS19936 (Navy)

NSN-----1375-01-037-5428

1375-01-037-5429

Packaging-----

Drawing-----5012844, 5012845

Packing Box:

Contains 6 MK 23's or

2 MK 24's

Material-----Wood

Weight (w/contents)----20.0 lb

Dimensions-----12-1/2 in x

6-1/4 in x

7-1/2 in

Cube-----0.3

References:

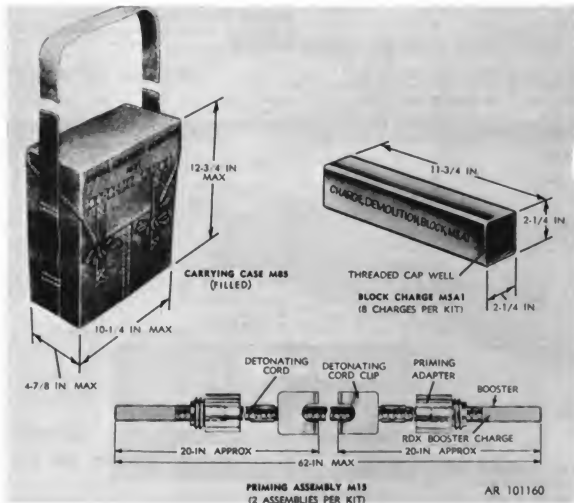
EODB/TM/TO 60A-2-1-50

SC 1375-95-CL-A03

CHAPTER 5
DEMOLITION KITS AND ASSEMBLIES

THIS PAGE INTENTIONALLY LEFT BLANK

CHARGE, DEMOLITION: ASSEMBLY M37

Type Classification:

Std AMCTCM 5263 dtd 1967.

Use:

Demolition charge M37 is used primarily in breaching obstacles or demolition of large structures where large charges are required (Satchel Charge).

Description:

The charge demolition assembly: M37 consists of a canvas bag (identified as carrying case M85) which contains 20 pounds of explosive

(Comp C4) in the form of eight M5A1 demolition blocks and two M15 priming assemblies. The demolition blocks are packed four to a bag along with four plastic hook assemblies, each with a 72 inch string attached. Each bag is in its own compartment of the carrying bag. The priming assemblies are in a pocket of the coverflap of the carrying bag. The carrying bag has two ties for tying the bag to a target.

The M5A1 charge is a rectangular block of Comp C4, 2 inches by 2 inches by 12 inches long, contained in a polyethylene container which has a threaded well cap at each end.

The priming assembly M15 is a piece of detonating cord approximately 60 inches long with a tetryl or PETN-filled booster at each end. Assembled to the detonating cord are two priming adapters M1A4 and two-clips, detonating cord: M1.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

Tabulated Data:

Container material-----Canvas
 Color-----Olive drab w/yel-
 low markings
 Weight (complete assembly)----23 lb
 Dimensions (packed carrying
 case)-----10-1/4 in. x 4-
 7/8 in. x 12-
 3/4 in.
 Filler-----Comp C4
 Method of actuation-----Military blasting
 cap, detonating
 cord

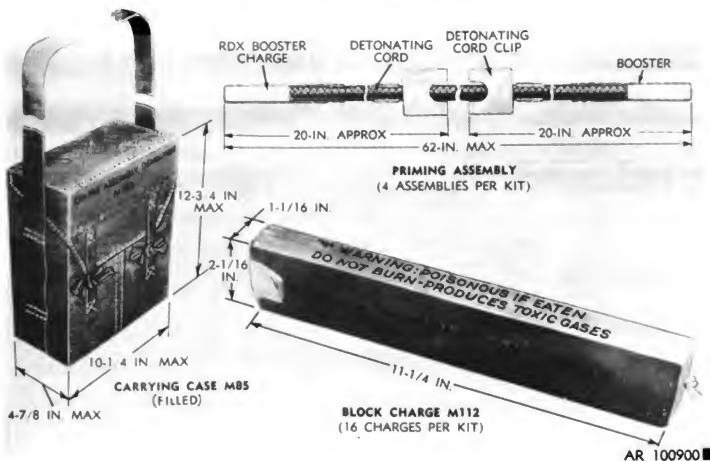
Shipping and Storage Data:

Quantity-distance class-----1.1
 Storage compatibility group----D-2
 DOT shipping classification---Class A
 DOT designation-----HIGH EXPLOSIVES--
 DANGEROUS
 DODIC-----M756
 Drawing-----8861107
 Packaging-----One assembly per
 canvas carrying
 case, 2 cases
 per wooden box
 Packing box:
 Weight-----57 lb
 Dimensions-----17-3/16 in. x
 13-1/4 in. x
 11-13/16 in.
 Cube-----1.5 cu ft

References:

TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL

CHARGE, DEMOLITION: ASSEMBLY M183



Type Classification:

Std AMCTCM 5263, dtd 1967.

Use :

Demolition charge assembly M183 is used primarily in breaching obstacles or demolition of large structures where large charges are required (Satchel Charge). This charge assembly replaces the charge assembly M37 when its supply is exhausted.

Description:

Charge assembly M183 consists of 16 block demolition charges M112, four priming assemblies and carrying case M85. Each priming assembly consists of a five-foot length of detonating cord assembled with two detonating cord clips and capped at each end with a booster. Each booster contains 13.5 grains of RDX or PETN. The components of the assembly are

issued in the carrying case.

The demolition charge M112 is a rectangular block of Comp C4 approximately 2 inches by 1-1/2 inches and 11 inches long, weighing 1-1/4 lbs. The block is in a mylar bag with a piece of double backed adhesive tape attached.

The M85 carrying case is a canvas bag with shoulder strap and ties.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave which demolishes the target by cutting, breaching, or cratering. The type of demolition achieved depends on the placement of the charge in relation to the target.

Tabulated Data:

Container material-----Canvas

Color-----Olive drab w/yel-
low markings
Weight (complete assembly)-----23 lb
Dimensions (assembled case)-----10-1/4 in. x 4-
7/8 in. x 12-
3/4 in.
Filler-----Comp C4
Method of actuation-----Military blasting
cap/detonating
cord

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-2
DOT shipping classification-----Class A
DOT designation-----HIGH EXPLOSIVES--
DANGEROUS
DODIC-----M757

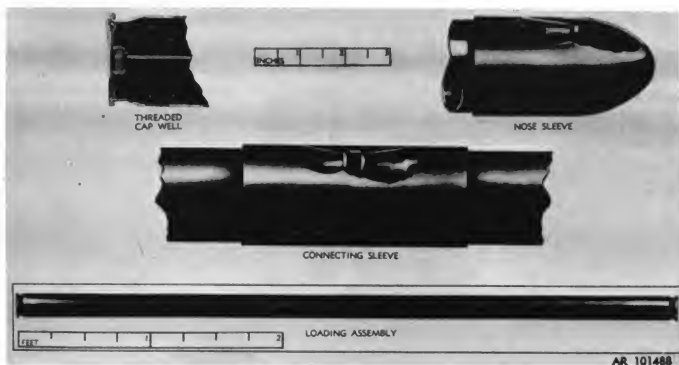
Drawing-----9216416
Packaging-----One assembly per
carrying case,
two cases per
wooden box

Packing box:
Weight (w/contents)-----57 lb
Dimensions-----16-5/8 in. x
11-5/16 in. x
12 in.
Cube-----1.5 cu ft

References:

TM 9-1375-213-12
TM 9-1375-213-34
FM 5-25
SC 1340/98 1L

DEMOLITION KIT, BANGALORE TORPEDO: M1A1 AND M1A2

Type Classification:

Std OTCM 36841, dtd 1958.

Use:

The bangalore torpedo demolition kit is used to clear paths through barbed wire entanglements and minefields. It clears a path 3 to 4 meters wide through barbed wire entanglements. In minefield breaching, it will explode all antipersonnel mines and most of the antitank mines in a narrow foot path. Many of the mines at the sides however may be shocked into a sensitive state, which makes extreme care necessary in any further mine-clearing. Bangalore torpedoes have also been used successfully for clearing heavy undergrowth of bamboo. It may also be used as a cratering charge, especially in connection with shaped charges against reinforced concrete targets.

Description:

Each kit contains 10 five foot long torpedoes (steel tubes filled with high explosive), 10

connecting sleeves, and a nose sleeve. Each end of the torpedo tube contains a threaded cap well. The nose sleeve, rounded at the end to facilitate pushing the torpedo through obstacles, is secured to the tube by a clip. The connecting sleeves are short, cylindrical couplings used to secure two or more torpedoes together, end to end. The M1A1 torpedoes have a main filler of approximately 9 lbs amatol with a TNT booster surrounding the capwells at each end. The M1A2 torpedoes have a main filler of approximately 10-1/2 lbs Comp B with a Comp A3 booster at each end.

Functioning:

When the charge is detonated, the explosive is converted into compressed gas. The gas exerts pressure in the form of a shock wave. The resultant blast from the shock wave clears a narrow path through a minefield or barbed wire entanglement.

Tabulated Data:

Container material-----Steel
Color-----Olive drab w/yellow markings

Weight (one tube)-----14.5 lb
 Dimensions:
 Length (one tube)-----5 ft
 Diameter-----2-1/8 in.
 Filler:
 M1A1-----Amatol and TNT
 M1A2-----Comp B and Comp
 A-3
 Method of actuation-----Military blasting
 cap

Shipping and Storage Data:

Quantity-distance class-----1.1
 Storage compatibility group----D-2
 DOT shipping classification----Class A
 DOT designation-----EXPLOSIVE BOMBS

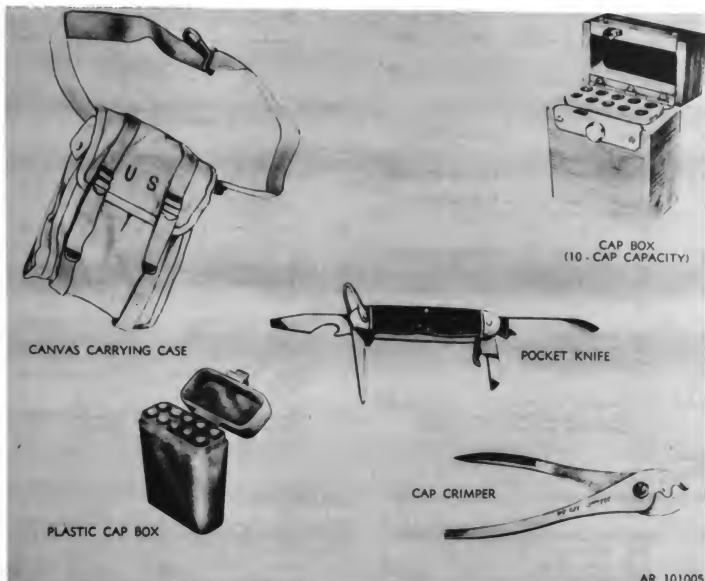
DODIC-----M028
 Drawing*-----8863369
 Packaging-----One kit per wooden
 box

Packing box:
 Weight (w/contents)-----198 lb
 Dimensions-----65-5/8 in. x 15-
 5/16 in. x 7 in.
 Cube-----4.1 cu ft

*Demolition Kit Bangalore Torpedo M1A2 only.

References:
 TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25
 SC 1340/98 IL
 FM 20-32

DEMOLITION EQUIPMENT SET: EXPLOSIVE INITIATING, NONELECTRIC

**Type Classification:**

The kit is STD for use by Army. There is no one committee action to classify the entire set. Rather, each component has been separately acted upon. The contents of the set are reviewed periodically by the user and items may be added or deleted as a result of the review.

Use:

This explosive initiation demolition equipment set is used for general demolition projects

requiring nonelectric initiation.

Description:

The nonelectric explosive-initiating demolition equipment set is composed of the components listed in tables 1 through 3 inclusive. Items listed in 1 are supplied as a kit on an initial issue basis only. Items in 2 and 3, used in conjunction with the items in the basic kit, are required but requisitioned separately. Items in all categories are requisitioned separately for replacement purposes.

Table 1. Components Issued in Basic Kit
(NSN 1375-00-047-3751)

Quantity	Item	NSN
2	Bag, Canvas, Carrying: demolition kit.	1375-00-212-4597
2	Box, Blasting Cap: plastic 10 cap capacity.	8140-00-168-6881
2	Crimper, Cap: M2 (w/fuze cutter).	5120-00-029-0683
2	Knife, Pocket	5110-00-162-2205
2	Pliers: lineman's (w/side cutter), length 8 in.	5120-00-239-8251
2	Tape, Measuring: self supporting, S, English and Metric graduation, 78.75 in.	5210-00-245-0301
1	Tape, Measuring: 5/8 in. w, non-metallic, 100 ft lg.	5210-00-554-7092

Table 2. Nonexplosive Components Required, but issued separately as needed. Quantities are nominal estimates.

Quantity	Item	NSN
25	Adapter, Priming: M1A4.	1375-00-565-4141
2	Tape, Pressure-Sensitive Adhesive: 2 in. wide, 72 yd roll w/adhesive on both sides.	7510-00-057-0096
100	Clip, Cord: M1, detonating.	1375-00-212-4602
2	Insulation Tape, Electrical: adhesive, 3/4 inch wide. 85 ft roll.	5970-00-644-3167
2	Sealing Compound: blasting cap, waterproof, 1/2 pt can.	1375-00-212-4603

2	Twine: fibrous No. 18, 1-lb ball.	4020-00-241-8892
50	Holder, Blasting Cap: M8.	1375-00-926-4105
2	Adhesive, Charge Demolition.	1375-00-935-9171

Table 3. Explosive Components Required, but Issued Separately as Needed

Quantity	Item	NSN/DODIC
50	Cap, Blasting: non-electric M7.	1375-00-756-1864 (M131)
80	Charge, Demolition: block, M112.	1375-00-724-7040 (M023)
5	Cord, Detonating: fuse, primacord, 100-ft spool.	1375-00-028-5161 (M455)
3	Cord, Detonating: PETN, olive drab, 1000 ft roll.	1375-00-180-9356 (M456)
2	Fuse, Blasting, Time: M700, 50 ft.	1375-00-028-5246 (M670)
50	Igniter, Blasting Fuse: M60 weather-proof.	1375-00-691-1671 (M766)

Tabulated Data:

NSN-----1375-00-047-3751
 Total weight-----6.29 lb
 Total volume-----0.24 cu ft

References:

SC 1375-95-CL-P02
 TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25

DEMOLITION EQUIPMENT SET: EXPLOSIVE INITIATING, ELECTRIC AND NONELECTRIC

**Type Classification:**

The kit is STD for use by Army. There is no one committee action to classify the entire set. Rather, each component has been separately acted upon. The contents of the set are reviewed periodically by the users and items may be added or deleted as a result of the review.

Use:

This explosive initiating demolition equipment

set is used for general demolition projects requiring either electric or nonelectric initiation.

Description:

The electric and nonelectric explosive-initiating demolition equipment set is composed of the components listed in tables 1 through 4 inclusive. Items listed in 1 are supplied as a kit on an initial issue basis only. Items in 2 and 3, used in conjunction with the items in the

basic kit, are required but requisitioned separately. Items in Table 4 are explosive items required by Ordnance Disposal Detachments and Controls. They are not supplied as a set, kit or outfit, but requisitioned separately. Items in all four categories are requisitioned separately for replacement purposes.

Table 1. Components issued in basic kit (NSN 1375-00-047-3750)

Quantity	Item	NSN
2	Bag, Canvas, Carrying: demolition kit.	1375-00-212-4597
1	Blasting Machine: ten-cap capacity.	1375-00-782-5541*
5	Box, Blasting Cap: plastic 10 cap capacity.	8140-00-168-6881
1	Chest, Demolition: engineer platoon, M1931.	1375-00-212-4600
2	Crimper, Cap: M2 (w/fuze cutter).	5120-00-029-0683
2	Tape, Measuring: self supporting, S, English and Metric graduation, 78.75 in., GGGT00106 (81348)	5210-00-245-0301
1	Tape, Measuring: 5/8 in. w, non-metallic, 100 ft lg, GGGT106 (81348).	5210-00-554-7092
1	Test Set, Blasting Cap: M51.	6625-00-999-3454**
2	Knife, Pocket	5110-00-162-2205
2	Pliers: lineman's (w/side cutter), length 8 in.	5120-00-239-8251
4	Reel, cable (firing, 500 ft).	8130-00-407-7859
1	Reeling Machine, Cable, Hand (w/ carrying straps, w/winding device, w/spool, w/o wire).	3895-00-498-8343

*When supply is exhausted, Blasting machine M32

NSN 1375-00-935-9173 is issued. Blasting machine 50 cap, M34, NSN 1375-00-567-0223 will replace the M32 Blasting machine when its supply is exhausted.

**Also listed as Test Set, Blasting Cap: M51 NSN 4925-00-999-3454. The test set replaces Galvanometer NSN 6625-00-212-4605 when supplies are exhausted.

Table 2. Nonexplosive Components Required, but Issued Separately as Needed. Quantities are Nominal Estimates Only.

Quantity	Item	NSN
100	Adapter, Priming: M1A4.	1375-00-565-4141
2	Tape, Pressure-Sensitive Adhesive: 2 in. wide, 72 yd roll w/ adhesive on both sides.	7510-01-057-0096
4	Cable, Powder, Electrical: firing, vinyl polymer insulation two conductor, No. 18 AWG stranded; 500-ft coil.	6145-00-299-6172
100	Clip, Cord: M1, detonating.	1375-00-212-4602 (M165)
6	Insulation Tape, Electrical: black adhesive, 3/4 inch wide. 85 ft roll.	5970-00-644-3167
2	Sealing Compound: blasting cap, waterproof, 1/2 pt can.	1375-00-212-4603
2	Twine: fibrous No. 18, 1-lb ball.	4020-00-241-8892
2	Wire, Electrical: Vinyl polymer, nylon jacket insulation, solid single tinned copper, No. 20 AWG, 200-ft coil.	6145-00-542-3968
50	Holder Blasting Cap: M8.	1375-00-926-4105 (M166)
	Holder, Blasting Cap: used w/electric and nonelectric blasting caps; plastic and sheet explosives, 447344.	1375-00-093-0140 (M165)

Table 2. Nonexplosive Components Required but Issued Separately as Needed (Cont)

<u>Quantity</u>	<u>Item</u>	<u>NSN</u>
2	Adhesive, Charge Demolition.	1375-00-935-9171
1	Battery, Dry, Silver Chloride (for galvanometer).	6135-00-128-1632
1	Battery, Dry, Silver Chloride (Low Temperature Type) (for galvanometer).	6135-00-833-9909

Table 3. Explosive Components Required, but Issued Separately as Needed

<u>Quantity</u>	<u>Item</u>	<u>NSN/DODIC</u>
50	Cap, Blasting: electric, M6.	1375-00-028-5224 (M130)
50	Cap, Blasting: non-electric M7.	1375-00-756-1864 (M131)
80	Charge, Demolition: block, M112.	1375-00-724-7040 (M023)
20	Charge, Demolition: block, M118.	1375-00-728-5941 (M024)
3	Charge, Demolition: Roll, M186, 25-lb, (PETN), 9211459 (19203). Used when NSN 1375-00-728-5941 is exhausted.	1375-00-926-4108 (M060)
50	Charge, Demolition: block, 1-lb (TNT).	1375-00-028-5142 (M032)
5	Cord, Detonating: fuse, primacord, 100-ft spool.	1375-00-028-5161 (M455)
3	Cord, Detonating: drab, 1000 ft roll.	1375-00-180-9356 (M456)
5	Destructor, Explosive: universal, M10.	1375-00-028-5171 (M241)
2	Fuse, Blasting, Time: M700, 50 ft.	1375-00-028-5246 (M670)
100	Igniter, Blasting Fuse: M60 weatherproof.	1375-00-691-1671 (M766)

Table 4. Expendable Explosive Items Required by EOD Only, but Issued Separately as Needed

<u>Quantity</u>	<u>Item</u>	<u>NSN/DODIC</u>
200	Cartridge, Caliber, 50: M33.	1305-00-028-6574 (A555)
50	Cartridge, impulse w/o integral cutting punch.	1378-00-896-3694 (M174)
20	Charge Demolition, Block TNT 1/4 lb.	1375-00-580-1377 (M030)
6	Cutter, Powder Actuated: MK23 Mod 0, 5012844 (53711).	1375-01-037-5428
6	Cutter, Powder Actuated: MK24 Mod 0, 5012845 (53711).	1375-01-037-5429

Tabulated Data:

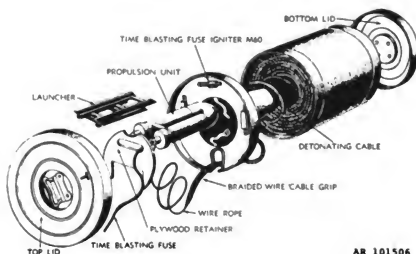

NSN-----1375-00-047-3750
 Total weight-----68.00 lb
 Total volume-----4.5 cu ft

References:

SC 1375-95-CL-P02
 TM 9-1375-213-12
 TM 9-1375-213-34
 FM 5-25

THIS PAGE INTENTIONALLY LEFT BLANK

DEMOLITION KIT, PROJECTED CHARGE: M1 AND M1A1 (M1E1)



Type Classification:

Obsolete Material Status Record 11756003.

Use:

Projected charge demolition kits M1 and M1A1 are used to clear an 8-foot lane through minefields planted with antipersonnel mines.

Description:

Each demolition kit consists of a cylindrical

carrying case, a 170-foot detonating cable, rocket motor M4 with launcher, time blasting fuse igniter, 15-second delay detonator and a tent stake. The entire demolition kit is contained in the waterproof aluminum carrying case, which is closed at each end with a removable lid. A pressfitted aluminum disk serves as a spacer securing the components inside the carrying case. The detonating cable, coiled around a cone in the case, is fitted at one end with a sleeve containing a booster charge and a capwell assembled with the delay detonator. This end of the cable also has a

braided wire cable grip with two wire loops for anchoring the cable to the tent stake. The rocket motor (positioned in the launcher) and a length of time blasting fuse are attached to the cable by a wire rope. Additionally, the M1A1 kit contains a lanyard and extra stakes for functioning the detonator remotely.

M1 and M1A1 (M1E1) projected charge demolition kits are identical in all respects except for the delay detonators and the time blasting fuse igniters issued with them. The M1A1 (M1E1) has the M60 weatherproof time blasting fuse igniter and the 15-second delay M1A2 percussion detonator, while the M1 has the M2 weatherproof time blasting fuze igniter and the 15-second delay M1 or M1A1 friction detonator.

Functioning:

Functioning occurs in the following sequence:

a. Fuse igniter is functioned in the usual manner by pulling the pull ring. The flame issued from the primer ignites the time blasting fuse.

b. The time blasting fuse ignites the M4 rocket which then becomes airborne and drags the detonating cable out of its container over the mine field. The cable falls to the ground and flight is arrested because the braided wire cable group is anchored to the ground by the tent peg.

c. The 15-second delay detonator (functioned manually) ignites the booster which in turn functions the detonating cable.

Tabulated Data:

Container material-----Aluminum
Color-----Olive drab w/yellow markings
Weight (complete kit)-----92 lb

Dimensions:
Length-----20 in.
Diameter-----16-1/2 in.
Explosive components-----Detonating cable
Method of actuation-----Delay detonator

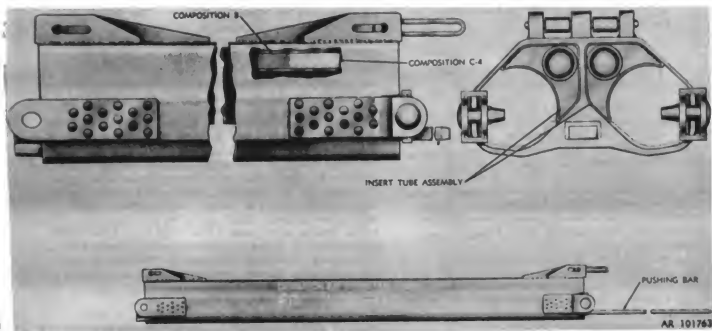
Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-2
DOT shipping classification-----Class A
DOT designation-----HIGH EXPLOSIVE—DANGEROUS
DODIC-----M445
Drawing-----8796266
Packaging-----One kit per carrying case, one case per cardboard lined wooden box
Packing box:
Drawing-----8797610
Weight (w/contents)-----121 lb
Dimensions-----25-7/16 in. x 18-3/8 in. x 19-7/32 in.
Cube-----5.20 cu ft

References:

FM 5-25
TM 9-1375-213-12
TM 9-1375-213-34
SC 1340/98 IL
FM 20-32

DEMOLITION KIT, PROJECTED CHARGE: M157

Type Classification:

STD A OTCM37415 dated 5/26/60.

Use:

Projected Charge Demolition Kit M157 is designed to clear a wide path for personnel and vehicles through minefield, planted with single-impulse pressure-type antitank mines. Although

the primary use of the kit is the breaching of minefields, it can be used effectively in breaching or cratering bands of log posts, steel rails, ditches and relatively small concrete obstacles.

Description:

This demolition kit consists of 79 irregular hexagonal tubes (section assemblies) approximately 11 inches wide, 7 inches high, which,

when assembled together, are 400 feet in length and the weight is approximately 10,000 pounds, including approximately 1,420 pounds of Comp B and approximately 27 pounds of Comp C-4. The components of the kit and the tank accessories used for deploying the kit are listed in Table 1.

Table 1. Tank Accessories and Component Parts for Assembly of 400-Foot (Approximately) Projected Charge Demolition Kit M157

Item	Quantity
Kit parts:	
Nose section assembly-----	1
Body section assembly-----	13
Center loading section assembly-----	62
Impact fuze section assembly-----	2
Tail section assembly-----	1
Fuzing:	
Fuze, mine, M602-----	2
Fuze explosive container loading assembly-----	2
Tank accessories (Accessories will fit M48A1 and M60 Tank):	
Cable, assembly No. 1-----	1*
Cable, assembly No. 2-----	1*
Chain, assembly No. 1-----	1
Chain, assembly No. 2-----	1
Clevis pin assembly-----	2
Drag plate assembly-----	1
Extension bar assembly-----	2
Gear box assembly-----	1
Multiple sheave assembly-----	1
Pulley support post assembly-----	1
Safety snap hook-----	3**
Shoulder screw (stripper bolts)-----	2
Single sheave assembly-----	1
Spring assembly-----	1
Bracket-----	1
Support-----	1
Nut (MS35690-1202)-----	2
Nut (MS35690-602)-----	2
Screw (MS90728-191)-----	4
Flat washer (MS27183-15)-----	2
Flat washer (MS27183-23)-----	2
Lock washer (MS35337-27)-----	6
Lock washer (MS35338-70)-----	4
Spare parts:	
Cotter pin (MS24665-134)-----	6
Cotter pin (MS24665-208)-----	6
Cotter pin (MS24665-495)-----	6
Cotter pin (MS24665-623)-----	6

*Cable assemblies—normally come assembled to the gear box assembly.

**One size 2 is assembled with Cable No. 1; two size 1 are assembled with spring assembly.

The entire kit is listed under DODIC M444. However, certain parts are separately listed for the convenience of the user. Accordingly, the tabulated data is arranged to reflect the major packaged assemblies and a brief description of each follows:

(1) Each section contains a pushing bar and is provided with joints at both ends; male on one end and female on the other, so that the sections can be linked together. The joints not only provide for attachment of one section to another, but assure flexibility of the assembled charge. The pushing bars, which run through tunnels in each section provide rigidity during emplacement and take stress or pushing. In addition to these common features, each section is designed to serve a particular function: The nose and tail sections are assembled with hook assemblies, hinges and plates which serve as contact points for the tank during emplacement. The body sections are empty and are primarily buffers assembled between the explosive-loaded sections and the nose and tail. The center loading sections and the impact fuze sections are explosive-loaded. Each contains two insert tubes loaded with Comp B and Comp C4. (The tubes are welded in place and cannot be disassembled for use as individual charges.) The insert tubes are specially shaped and positioned to obtain a shaped charge effect.

The impact fuze section also contains a fuze housing assembly which accommodates the bullet impact fuze assembly and the fuze explosive container loading assembly.

(2) Mine Fuze M603 is an impact type fuze fitted with an M120 booster. One fuze and one booster are assembled in the fuze well of each bullet impact fuze assembly.

(3) The Fuze Explosive Container Loading Assembly consists of a cone-shaped charge of Comp B in a metal container.

(4) Accessory Kit consists of a number of metal parts which, when assembled to a tank, enables the tank to push or pull the demolition kit.

Functioning:

After assembly of the kit, a tank pulls it to the edge of the minefield. The tank then pushes the kit into the minefield. Detonation of the charge is initiated by the impact of a .30 or .50 caliber bullet. When the bullet strikes the bullet impact fuze assembly, it detonates the fuze. The fuze sets off the booster. The booster, in turn, detonates the Comp B shaped charge in the fuze explosive container loading

assembly. The detonation of the shaped charge creates a narrow, concentrated jet of energy which penetrates the insert tubes in the impact fuze section assembly and detonates the filler. Detonation of the impact fuze section assembly results in a chain reaction which, sequentially, detonates the remaining explosive loaded sections. The resulting blast craters the area, creating a path approximately 320 feet long, 12 to 16 feet wide, and 3 to 5 feet deep.

Tabulated Data:

A. Complete assembly (less accessories).

Container material-----Aluminum alloy
Color-----Olive drab w/yel-
low markings
(on center sec-
tion)
Weight-----10,000 lb
Diameter (cross section)-----7 in. x 12 in.
Length-----400 feet
Method of actuation-----Bullet impact

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-2
DOT shipping classification-----Class A
DOT designation-----Explosive Bomb
DODIC-----M444

B. Nose Section.

Container material-----Aluminum
Color-----Olive drab with
black marking
Weight-----155 lb
Length-----90 in.
Width-----11 in.
Height-----1-1/4 in.
Fillers-----None

Shipping and Storage Data:

Quantity-distance class-----N/A
Storage compatibility group-----N/A
DOT shipping classification-----AMMUNITION—NON
EXPLOSIVE
Drawing-----F8838124
Packaging-----One section per
wooden box
Packed assembly:
Weight w/contents-----247 lb
Dimensions-----96-7/16 in. x 14
7/16 in. x 19-
31/32 in.
Cube-----15.8 cu ft

C. Body Section.

Container-----Aluminum
Color-----Olive drab w/black
markings
Weight-----89 lb
Dimensions:
Length-----60 in. approx
Width-----12 in. approx
Height-----7-1/4 in.
Filler-----None

Shipping and Storage Data:

Quantity-distance class-----N/A
Storage compatibility group-----N/A
DOT shipping classification-----Class N/A
DOT designation-----AMMUNITION—
NONEXPLOSIVE
Drawing-----8838126
Packaging-----One section per
two wooden end
protectors
Packed assembly:
Weight w/contents-----115 lb
Dimensions (each end
protector)-----10 in. x 14-3/8 in.
x 8-13/16 in.
(overall length
approx 5 ft 6 in.)
Cube-----4.8 cu ft

D. Center loading section.

Container-----Aluminum
Color-----Olive drab w/yel-
low marking
Weight-----135 lb
Dimensions:
Length-----Approx 60 in.
Width-----Approx 12 in.
Height-----Approx 7-1/4 in.
Filler:
Composition B-----22 lb
Composition C-4-----0.42 lb

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-2
DOT shipping classification-----Class A
DOT designation-----EXPLOSIVE BOMB
Drawing-----8836946
Packaging-----One section per
two wooden end
protectors
Packed assembly:
Weight w/contents-----161 lb
Dimensions-----10 in. x 14-3/8 in.
x 8-13/16 in.
(overall length
approx 5 ft 6 in.)

Packaged assembly:—Continued
Cube-----4.8 cu ft

E. Explosive Fuze Container Loading Assembly.

Container-----Sheet steel
Color-----Olive drab w/yel-
low markings
Weight-----5-1/2 lb (approx)
Dimensions:
Length-----6-1/4 in.
Width-----3-1/4 in.
Height-----6-1/4 in.
Filler (each item):
Fuze container - Comp B
or B1-----5 lb
M120 Booster (F8835171)
Comp A4-----11 grams
M603 Fuze w/M45 Detonator:
RDX-----1.85 grams
Lead oxide-----401 grams
Primer mix-----1.69 grams

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-2
DOT shipping classification-----Class A
DOT designation-----EXPLOSIVE BOMB
Drawings:
Fuze explosive container
(loading)-----1375-00-987-4961
M603 fuze-----73-9-55
M120 booster-----8835171
Packaging-----One fuze per metal
container, 2 con-
tainers (2 fuzes)
and 2 explosive
container loading
assemblies per
wooden box
Packaged assembly:
Weight w/contents-----18.3 lb
Dimensions-----13-3/4 in. x 8 in.
x 8-27/32 in.
Cube-----0.5 cu ft

F. Tail section.

Container-----Aluminum
Color-----Olive drab w/black
markings
Weight-----157 lb
Dimensions:
Length-----90 in. (approx)
Width-----12 in. (approx)
Height-----18 in.
Filler-----None

Shipping and Storage Data:

Quantity-distance class-----N/A
Storage compatibility group-----N/A
DOT shipping classification-----N/A
DOT designation-----AMMUNITION—NON-
EXPLOSIVE
Drawing-----8838152
Packaging-----One section per
wooden box
Packaged assembly:
Weight w/contents-----247 lb
Dimensions-----112 in. x 14-3/8
in. x 19-17/32
in.
Cube-----18.2 cu ft

G. Impact Fuze Section.

Container-----Aluminum
Color-----Olive drab w/yel-
low markings
Weight-----148 lb
Dimensions:
Length-----60 in. (approx)
Width-----12 in. (approx)
Height-----14 in. (approx)
(at highest
point)
Filler:
Comp B-----22 lb
Comp B-4-----0.42 lb

Shipping and Storage Data:

Quantity-distance class-----1.1
Storage compatibility group-----D-2
DOT shipping classification-----Class A
DOT designation-----EXPLOSIVE BOMB
Drawing-----8836944
Packaging-----One assembly per
wooden box
Packaged assembly:
Weight w/contents-----214 lb
Dimensions-----67-5/8 in. x
14-7/16 in. x
20-17/32 in.
Cube-----11.6 cu ft

H. Accessory Kit (tools and push attachments).

The accessories come packed in three boxes.
Each box contains a carton in a barrier bag.
The size, shape and gross weights are not
specified for boxes No. 1 and No. 2. Available
data for box No. 3 is listed below:

Box No. 1 contains:
2 Extension bars-----Part No. 8799635

- 1 Chain assembly No. 1-----Part No. 8799665
1 Chain assembly No. 2-----Part No. 8799667

Box No. 2 contains:

- | | | | |
|---|------------------------------|----------|---------|
| 1 | Drag plate assembly----- | Part No. | 8799639 |
| 1 | Pully support post----- | Part No. | 8799657 |
| 1 | Multiple sheave assembly---- | Part No. | 8799652 |
| 2 | Clevis pin assembly----- | Part No. | 8799690 |
| 1 | Spring assembly----- | Part No. | 8799673 |
| 1 | Single sheave assembly----- | Part No. | 8799651 |
| 1 | Bracket----- | Part No. | 9211241 |
| 1 | Support----- | Part No. | 9211242 |

Component parts package containing:

- ```

2 nuts - MS3 5690-1202-----2 flat washers -
 MS27183-15
2 nuts - MS35690-602-----2 flat washers -
 MS27183-23
4 screws - MS90728-60-----6 lock washers -
 MS35337-27
6 screws - MS90728-191-----4 lock washers -
 MS35338-70

```

Box No. 3 contains:

Gearbox assembly - Cable assembly No. 1 w/attach-  
ments - Cable assembly No. 2 w/attachments.

- 6 cotter pins - MS24665-134----6 cotter pins - MS24665-495  
6 cotter pins - MS24665-208----6 cotter pins - MS24665-623

**Packaged assembly - Box. No. 3:**

Weight-----54 lb  
Dimensions-----19-15/16 in. x  
                    11-1/16 in. x  
                    10-3/32 in.  
Cube-----1.4 cu ft

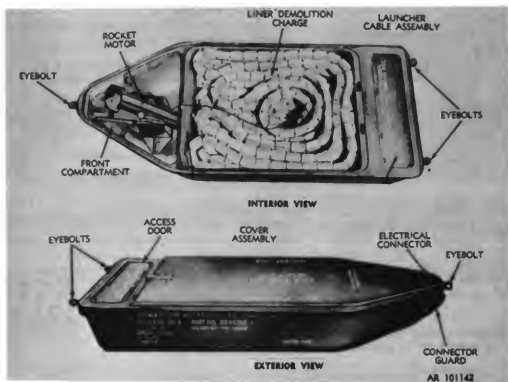
### References:

TM 9-1375-204-10  
FM 5-25  
FM 20-32  
SC 1340/98 IL



THIS PAGE INTENTIONALLY LEFT BLANK

## DEMOLITION KIT, PROJECTED CHARGE: M173

Type Classification:

CAT AMCTCM 8886 dated January 1972.

Use:

Projected Charge Demolition Kit M173 is a minefield clearing device used specifically in areas planted with a single-impulse, pressure-type, antitank mines. The kit can be towed over land or water and fired by an appropriate size vehicle fitted with a 24-volt, direct-current, bayonet-type receptacle.

Description:

Demolition Kit M173 consists, basically, of a waterproof skid, a linear demolition charge, a linear charge propulsion system a fuze and the accessories required to tow and fire the kit. The fiberglass hull (body) of the boat-shaped skid is divided into three compartments. The front compartment houses the linear charge propulsion system; the Rocket Motor M95, and

its launcher. The center compartment contains Linear Demolition Charge M96 and the arresting cable. The rear compartment contains Propellant Actuated Thruster M24, Demolition Kit Fuze M134, the tow cable and its explosive release mechanism, as well as a tow bar, reel of electrical wire, and a firing switch. The linear charge is 300 feet long and consists of a central core of nylon rope and two strands of detonating cord, surrounded by 400 pairs of split cylindrical charges spaced evenly along the core. A nylon cloth sheath covers all the charges and is tied between each pair to create a sausage-like construction. Explosive boosters are crimped onto the ends of the detonating cord strands. The boosters extend through the fuze holder and butt up against the fuze's detonators. The linear charge is connected to the rocket motor by a launcher cable assembly and to the fuze by a two-section fuze holder. A one-piece cover assembly covers the front and center compartments of the skid. The rear compartment is covered by an access door. An electrical connector with connector guard is attached

to the front of the skid. Both front and rear are fitted with eyebolts for towing.

#### Functioning:

The kit is readied for deployment by using the accessories stored in the accessory compartment by:

- a. Attaching tow cable between vehicle and skid and tow cable release.
- b. Attaching the electrical cable (umbilical) between the fire control switch in the vehicle and the skid.
- c. Installation of fuze into fuze holder.
- d. Installing the M24 Propellant Thruster to the main cover.

After the kit is towed to the proper location, it is electro-explosively released from its mechanical coupling with the vehicle. The operator moves vehicle to a safe distance from which he fires the kit by remote control. This is accomplished by use of the fire control switch. The various positions on the firing control switch provides for sequential operations for functioning the item:

- a. Tow. This position releases the towing vehicle from the item to permit it to retire to a safe position.
- b. Cover. This position functions the M24 thruster to remove cover. When the cover flies off, it exposed the line charge and causes the rocket-launcher to come into firing position.
- c. Rocket. This position fires the M95 Rocket to project the line charge over minefield and to arm the fuze.
- d. Fire. When the line charge comes to rest on the ground, the switch is placed in this position to function the fuze. In turn, the fuze initiates detonating cord which then detonates the line charge, to clear the path in the minefield.

#### Tabulated Data:

Container (skid) material-----Fiberglass  
Color-----Olive drab w/yel-  
low markings

Weight-----3,100 lb  
Dimensions-----145 in. x 56-1/2  
in. x 24 in.  
Filler (linear charge)-----Comp C4  
Linear Demolition Charge M96:  
Length-----300 ft  
Weight (total)-----1,720 lb  
Weight of Comp C4  
Explosive (M96)-----1,500 lb  
Number of Explosive Charges  
on Line-----1,200 (600 pairs)  
Electric Power Supply-----24 V dc  
Method of Actuation-----24 V dc

#### Shipping and Storage Data:

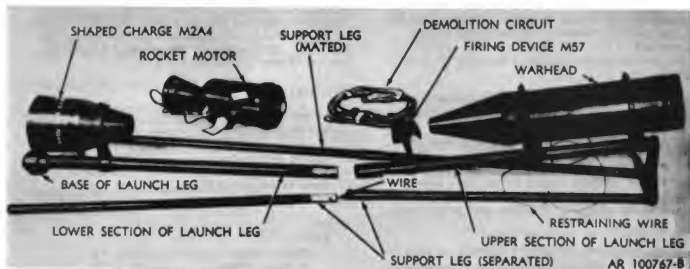
Quantity-distance class-----1.1  
Storage compatibility group-----D-2  
DOT shipping classification-----Class A  
DOT designation-----SP5409 EXPLOSIVE  
MINE\*  
DODIC-----M443  
NSN-----1375-00-812-3972  
Drawing-----8846706  
Packaging-----Plywood crate on  
pallet w/skids  
(12 ft 8 in. x  
5 ft 4 in. x  
2 ft 11 in.)

#### References:

\*For practice items, DMC Kit Projectile Charge M174 w/inert fuze. DOT designation is "SP5409 Jet Thrust Unit, Class B Explosive".

TM 9-1375-202-10  
TM 9-1375-213-12  
TM 9-1375-213-34  
FM 20-32  
FM 5-25  
SC 1340/98 IL

DEMOLITION KIT, CRATERING M180  
DEMOLITION KIT, CRATERING, TRAINING: M270



Type Classification:

Std (LCC-A). DEVA correspondence review dated 3 July 1974 with approval by General John C. Raean on 1 July 1974.

Use:

The M180 demolition kit quickly makes an effective crater in all types of roads to obstruct the movement of wheeled and tracked vehicles. It can also be used for packing airfields. The M270 is an inert training.

Description:

a. **Tactical Demolition Kit.** Cratering Demolition Kit M180 consists of a Shaped Charge M2A4, an Electrical Firing Device M57, which has been modified, a warhead, a rocket motor,

a tripod, and a demolition circuit. The shaped charge, firing device and warhead are permanently attached to the launch leg of the tripod; the rocket motor and the demolition circuit (packaged in a wooden subpack) are shipped unattached and are connected to the other components at time of use.

b. **Training Demolition Kit.** Cratering training demolition kit M270 consists of an inert, shaped charge (M2A3), warhead, rocket motor, demolition circuit and firing device (M57) assembled onto a tripod in the same manner as the M180.

c. **Color and Marking.** The M270 demolition kit is identical in appearance to M180 demolition kit except for color and markings. The major components of the tactical kits are olive drab with yellow markings. The major components of the training kits are blue with white markings.

The M270 training demolition kit is totally inert.

d. Tripod Assembly. The tripod consists of three legs approximately 6 feet long, joined together by a yoke (called apex fitting). Two of the legs are one inch in diameter and the remaining one, the load-carrying leg, is 1-1/2 inches in diameter. They are packed partially disassembled in 3 foot lengths. The load carrying leg contains brackets to hold the rocket and warhead. A 15-lb shaped charge, and an M57 Firing Device are permanently mounted on load carrying leg.

e. Demolition Circuit. The demolition circuit consists of several electrical and nonelectrical components which form a continuous firing train connecting the firing device to the shaped charge. The components are:

(1) A 10-foot length of No. 18, two-conductor wire with an electrical connector on one end and an M6 electric blasting cap at the other end.

(2) A 9-foot length of detonating cord with a priming adapter M1A4 and an M7 nonelectrical blasting cap at one end.

The M6 cap is connected to the free end of the detonating cord by a plastic sleeve to assure close contact between the detonating cord and the blasting cap and good propagation of the detonation. The demolition circuit is shipped in a plastic bag which is enclosed in a wooden box. The box top is secured by two nylon straps.

f. Charge Demolition, Shaped 15-pound, M2A4. The shaped charge contains approximately 11 pounds of Comp B, with a 50 gram booster (approximately 1.8 ounces) of Comp A-3, in a moisture resistant molded fiber container. A cone of glass is used as a cavity liner and a threaded cap well is located at the top of the charge.

#### Functioning:

After the item is unpacked, assembled, and set in place, it is functioned as follows:

A 15-cap blasting machine is used to fire the kit. Current generated by the machine simultaneously ignites the M2 squibs and the delay-type electric blasting cap in the rocket. The squibs ignite the propellant grain which causes the rocket motor to build thrust until the shear strength of the attaching hardware is exceeded. When this occurs, the entire assembly, rocket motor and warhead, moves toward the firing device. On impact, the firing device handle is crushed, and current is

generated by the firing device which causes initiation of the following demolition circuit components in sequence: M6 electric blasting cap, detonating cord and M7 nonelectric blasting cap. The M7 nonelectric cap initiates the shaped charge which blasts a pilot hole in the surface. As the hole is being created, the rocket motor propels the warhead through the hole. The delay-type blasting cap initiates the tetryl lead which detonates the booster that detonates the warhead. Detonation of the warhead completes the cratering action of the kit.

#### Tabulated Data:

##### Container material:

|                         |                                |
|-------------------------|--------------------------------|
| Warhead-----            | Fiberglass wound plastic       |
| Rocket motor-----       | Steel                          |
| Shaped charge-----      | Fiberboard                     |
| Demolition circuit----- | Wood subpack                   |
| Color-----              | Olive drab with yellow marking |

##### Weight:

|                        |         |
|------------------------|---------|
| Bird:                  |         |
| Rocket motor-----      | 27.6 lb |
| Warhead assembly-----  | 47.0 lb |
| Coupling clamp-----    | 1.0     |
| Total bird weight----- | 75.6 lb |
| Tripod assembly-----   | 27.0 lb |

##### Dimensions:

|                                               |        |
|-----------------------------------------------|--------|
| Kit (folded, Crated & strapped for shipment): |        |
| Length-----                                   | 39 in. |
| Width-----                                    | 11 in. |
| Height-----                                   | 16 in. |

##### Rocket motor:

|               |             |
|---------------|-------------|
| Length-----   | 18 inches   |
| Diameter----- | 6.42 inches |

##### Warhead:

|               |           |
|---------------|-----------|
| Length-----   | 29.28 in. |
| Diameter----- | 6.46 in.  |

##### Firing Device:

|             |          |
|-------------|----------|
| Length----- | 4.25 in. |
| Width-----  | 1.25 in. |
| Height----- | 3.5 in.  |

##### Filler (M180 oak):

|                    |                                     |
|--------------------|-------------------------------------|
| Rocket motor-----  | M7 propellant (MIL-P-14737 type II) |
| Warhead-----       | Composition M-6                     |
| Shaped charge----- | Comp B + Comp A3 booster            |

#### Shipping and Storage Data (M180):

|                                  |                                          |
|----------------------------------|------------------------------------------|
| Quantity-distance class-----     | 1.1                                      |
| Storage compatibility group----- | E                                        |
| DOT shipping classification----- | EXPLOSIVES A                             |
| DOT marking-----                 | Rocket ammunition w/explosive projectile |

DODIC-----M965  
 NSN-----1375-00-148-7159  
 Drawing-----9244400  
 Packaging-----One per wirebound  
                   crate

## Packing box:

Weight-----165 lb  
 Dimensions-----46 in. x 13-1/16  
                                 in. x 22-3/32  
                                 in.  
 Cubic displacement-----7.2 cu ft

Shipping and Storage Data (M270):

Quantity-distance class-----N/A  
 DODIC-----None  
 NSN-----6920-01-087-0038  
 Drawing-----9331717  
 Packaging-----One per wooden  
                                 box  
 Weight-----180 lb

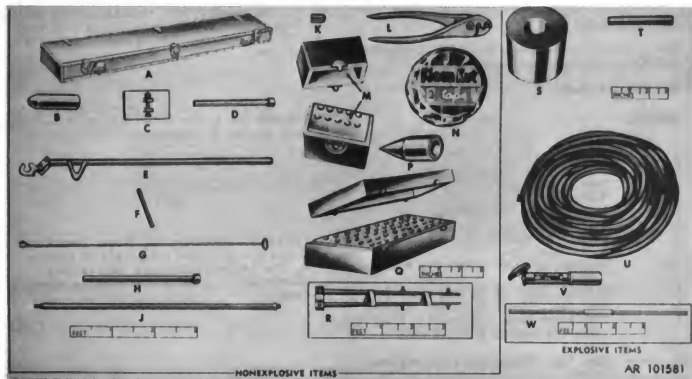
Dimensions-----46-1/8 x 13-5/8 x  
                                 21-7/8 in.  
 Cube-----8.0 cu ft

References:

TM 9-1375-213-12  
 TM 9-1375-213-12-1  
 TM 9-1375-213-34  
 FM 5-28  
 SC 1340/98 IL  
 TM 9-1300-206  
 TM 38-250  
 R M. Graziano Tariff No. 30  
 Supplements and/or Revisions to Code of  
 Federal Regulations 49CFR 100-199  
 Motor Carriers Explosives and Dangerous  
 Articles Tariff Number 14 Supplements to  
 Coast Guard Regulations 108

THIS PAGE INTENTIONALLY LEFT BLANK

## EXPLOSIVE KIT, EARTH ROD: SET NO. 1

Type Classification:

Obsolete MSRS 11756003.

Use:

The earth rod explosive kit is used in demolition and construction projects to make small diameter holes about six feet deep in earth and soft shale. The diameter of the hole, usually several inches in size, can be enlarged by the use of linear or improvised charges. The holes, about 12 in. in diameter, can be used for emplacing cratering explosives, log obstacles, and classes 6, 7, and 9 telephone poles. The kit is not a replacement for the earth auger; rather, it is used in situations which prohibit the use of the earth auger.

Description:

Earth Rod Explosive Kit, Set No. 1, comprised of the explosive and nonexplosive items listed in (1) and (2) below, is assembled by the operator immediately prior to use. The assembled device consists of a 6-foot steel rod (earth rod M13) fitted with a point at one end and a firing chamber at the other. The cylindrical chamber holds the propelling charge and its primer. An extractor rod, which fits through holes in the chamber facilitates lifting the rod out of the

hole. The extension rod is also used to lengthen the 6-foot rod. Tripod M23 can be used to stabilize the rod prior to and during firing, if necessary. A linear charge, M3 is included in the kit for use, as necessary, to enlarge the hole made by the earth rod. In addition, bundles of detonating cord can be used as improvised charges. A forked insertion rod is included in the kit for handling improvised charges. Time blasting fuse and a fuse igniter are used to fire the propelling charge's primer. Additional igniters, blasting fuse and blasting caps are supplied to detonate the linear charge or then improvised charges.

Functioning:

The propelling charge, after being assembled with the primer, is placed into the bottom of the firing chamber of the Earth Rod. Then, mud or clay is firmly packed onto the charge to fill the firing chamber. The time blasting fuse is protruding through the mud. The fuse is initiated with a Fuse Igniter or other convenient means (the operator takes cover). The burning fuse lights the black powder in the primer. The burning powders emit large quantities of gas which cause the mud slug to be propelled. The recoil, a force equal and opposite to the force propelling the mud, drives the rod down into the ground. The Earth Rod Explosive Kit is not effective in rock or other hard material. After



the rod is extracted, the hole is enlarged to suit the mission.

#### Tabulated Data:

NSN-----1375-00-028-5234  
DODIC-----M820

#### Nonexplosive Items:

| <u>Quantity</u> | <u>Item</u>                                                       |
|-----------------|-------------------------------------------------------------------|
| 1               | Chest                                                             |
| 1               | Chamber: Firing                                                   |
| 1               | Plate: Base, extractor, assy                                      |
| 1               | Rod: extension                                                    |
| 1               | Extractor: rod                                                    |
| 1               | Rod: handles and starting                                         |
| 1               | Rod: inserting                                                    |
| 2               | Rod: intermediate                                                 |
| 2               | Rod: main, long                                                   |
| 100             | Adapter, priming Explosive M1A3 or M1A4                           |
| 1               | Crimper, Cap: M2 (w/fuse cutter)                                  |
| 1               | Box, Cap: 10-cap capacity, infantry                               |
| 2               | Insulation Tape, Electrical: Black adhesive cotton, 3/4-inch wide |
| 100             | Point                                                             |
| 2               | Box, Cap: 50-cap capacity, engineer                               |
| 1               | Tripod                                                            |

#### Explosive Items:

| <u>Quantity</u> | <u>Item</u>                                                                | <u>DODIC</u> |
|-----------------|----------------------------------------------------------------------------|--------------|
| 100             | Charge, Propelling, Earth Rod: M12 (w/primer, M44).                        | M405         |
| 100             | Cap, blasting: Special non-electric (type I, J-1, PETN).                   | M131         |
| 2               | Fuse, Blasting, Time: 50 ft coils.                                         | M670         |
| 200             | Igniter, Time Blasting Fuse: M2 (weatherproof).                            | M766         |
| 100             | Charge, Demolition: Linear (two 3 in. sections and one connecting sleeve). | M440         |

#### Packaging:

a. One complete kit, composed of the quantity of items listed above, is issued in a 73 inch x 11-1/5 inch x 5-5/8 inch plywood chest as a basic issue item.

b. Explosive items can be requisitioned by DODIC M820 (or by the individual DODIC indicated above), packed as required.

#### NOTE

The propelling charge and linear demolition charge are described separately in chapter 4. The tripod is the next item in this chapter and is available as a replacement item.

#### References:

TM 9-1375-213-12  
TM 9-1375-213-34  
FM 5-25  
SC 1340/98-IL

## TRIPOD M23 ASSEMBLY FOR BLAST DRIVEN EARTH ROD M13

Type Classification:

Obsolete material status record 11756003.

Use:

This item, a separate item of issue, is used for holding the Earth Rod M13 in a vertical position when the terrain is such that the rod cannot be started manually. It is part of a system for creating bore holes in the ground of about 12 inches in diameter. The hole is suitable for accommodating Classes 6, 7, and 9 telephone poles and for emplacing cratering charges. The system is not a replacement for the earth auger. Rather it is a supplement, in that it is used in situations which prohibit the use of the auger.

Description:

This item is a tripod whose legs are approximately 60 inches long. The upper ring, which holds the three legs together has an inside diameter of 4-3/4 inches. This is sufficient

to support the rod and permit clearance for the firing chamber to pass through.

Functioning:

This item only serves as a support for the earth rod for firing into the ground. Once the rod is in the ground the tripod is removed and returned to storage.

Tabulated Data:

|                    |                                                                                    |
|--------------------|------------------------------------------------------------------------------------|
| Container material | Wood                                                                               |
| Color              | Olive drab                                                                         |
| Weight             | 15 lb (approx)                                                                     |
| DODIC              | None                                                                               |
| NSN                | Not available                                                                      |
| Drawing            | 82-13-20                                                                           |
| Packaging          | Wood chest 62-1/4 in. x 4-1/8 in. x 9-1/4 in. See Dwg D72654781 Springfield Armory |

References:

TM 9-1375-213-12

TM 43-0001-38

TM 9-1375-213-34

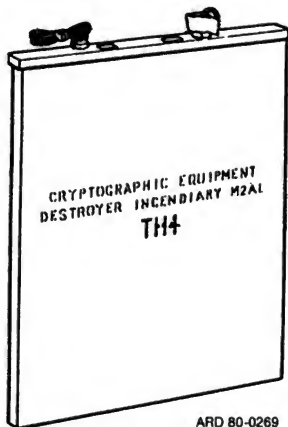
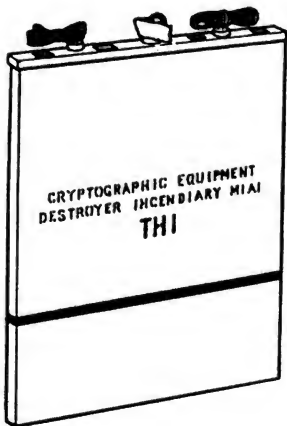
FM 5-25

SC 1340/98 IL

CHAPTER 6  
INCENDIARY DEVICES

THIS PAGE INTENTIONALLY LEFT BLANK

## CRYPTOGRAPHIC EQUIPMENT DESTROYER, INCENDIARY (TYPICAL): M1A1, M1A2, AND M2A1



ARD 80-0269

Type Classification:

STD CCTC 3799.

Use:

The incendiary cryptographic equipment destroyers are designed to destroy specific cryptographic devices stored in CH-76 safes.

Description:

The Incendiary Cryptographic Equipment Destroyer is a sheet metal box filled with an incendiary mixture, fitted with a manual pyrotechnic delay ignition fuze and an electric fuze or a pair of electric initiation squibs. A cellulose acetate cup, filled with first-fire mixture, is imbedded in the filling directly beneath each fuze. Three metal hangers, nuts, bolts, and washers are packed with each destroyer for installation. An instruction card is also packed with each destroyer.

Differences Between Models:

a. The M1A1 Incendiary Cryptographic Equipment Destroyer is 21 inches long by 15 inches wide by 1-1/4 inches deep, filled with approximately 28 pounds of TH1 incendiary mixture. It has two electric squibs and an M201A1 manual ignition fuze with a shortened safety lever, as described in TB CML 109.

b. The M1A2 TH1 Incendiary Cryptographic Equipment Destroyer is similar to the M1A1 TH1 destroyer except that it is fitted with two M209 electric fuzes and an M210 manual ignition fuze, as described in TB CML 109.

c. The M1A2 TH4 Incendiary Cryptographic Equipment Destroyer is 21 inches long by 15 inches wide by 1-1/4 inches deep, filled

with approximately 28 pounds of TH4 incendiary mixture. It has two M209 electric fuzes and an M210 manual ignition fuze, as described in TB CHL 109.

d. The M2A1 TH4 Incendiary Cryptographic Equipment Destroyer is 16 inches long by 8-1/2 inches wide by 1 inch deep, filled with approximately 8-1/2 pounds of TH4 incendiary mixture. It is fitted with an M210 manual ignition fuze and an M209 electric fuze, as described in MIL-C-10244.

#### Functioning:

All of the Cryptographic Equipment Destroyers offer the option of electric or non-electric initiation.

a. In the electric mode, the destroyer is emplaced atop the equipment to be destroyed; the wires from the electric initiator(s) are connected to a field firing lead which is, in turn, connected to a blasting machine. When the blasting machine is functioned, the electrical pulse it generates, fires the squibs or mine activator(s) which ignites the first fire mixture which, in turn, ignites the thermite. Once ignited, thermite is practically unextinguishable and will burn with a flame hot enough to melt or ignite almost any material in contact with it.

b. In the manual initiation mode, the destroyer is emplaced and the operator removes the safety pin and pulls the fuze's pull ring. This fires a primer or ignites friction powder which lights a pyrotechnic delay element. After seconds, the delay element burns through to a small booster which ignites the first fire mixture. The remainder of the functioning sequence is as above.

#### Tabulated Data:

##### Fuzes:

Model M1A1 TH1:  
Electric (2 ea)-----M2 squib  
Manual (1 ea)-----M201A1  
Model M1A2 TH1 and  
M1A2 TH4:  
Electric (2 ea)-----M209  
Manual (1 ea)-----M210  
Model M2A1 TH4:  
Electric (1 ea)-----M209  
Manual (1 ea)-----M210

##### Color:

Model M1A1 TH1 and  
M1A2 TH1-----Grey w/purple  
band  
Model M1A2 TH4 and  
M2A1 TH4-----Red w/black  
band

##### Weight (approx):

M1 series-----36 lb (16.4 kg)  
M2 series-----11 lb (5 kg)  
Filler-----Thermite 1 or  
Thermite 4

##### Filler weight:

M1 series-----28 lb (12.7 kg)  
M2 series-----8-1/2 lb (3.8 kg)  
Method of actuation-----Manual pull ring  
or blasting  
machine

#### Shipping and Storage Data:

Quantity-distance class-----1.3  
Storage compatibility group-----G  
DOT shipping classification-----Class B explosive  
DOT designation-----SPECIAL FIREWORKS—  
HANDLE CAREFULLY—  
KEEP FIRE AWAY  
DODIC-----M598 (M1 series);  
M600 (M2 series)

##### Specifications:

M1A1 (TH1)-----MIL-I-10243  
Drawing-----C4-4-17  
M1A2 (TH1)-----MIL-C-12469J  
Drawing-----D4-4-46  
M1A2 (TH4)-----MIL-L-12469J  
Drawing-----D4-4-46  
M2A1 (TH4)-----MIL-I-10244H  
Drawing-----C4-4-27

##### Packaging:

M1 series-----One destroyer per  
wooden box  
M2 series-----Two per wooden  
box

##### Packing box (M1 series):

Weight (w/contents)-----55 lb (25 kg)  
Dimensions-----30-3/8 x 28-1/2 x  
19-3/8

Cube-----1.08 cu ft

##### Packing box (M2 series):

Weight (w/contents)-----28 lb (12.7 kg)  
Dimensions-----20-1/2 x 11 x  
6-1/2

Cube-----0.85 cu ft

#### Shipping Container:

##### Outer container—Wooden box

(M1A2 TH4 only):  
Length (inside)-----25-1/8 in. (63.  
82 cm)  
Width (inside)-----18-1/8 in. (46.04  
cm)  
Height (inside)-----22-1/8 in. (54.0  
cm)

Container weight loaded-----55 lb (25 kg)


##### References:

TB CHL-109  
SB 55-730-10  
TM 3-250  
SB 725-1300-1

## FILE DESTROYER, INCENDIARY, ABC-M4



NOTE:  
1. OXIDIZER BOX  
2. IGNITER BOX  
3. RACK



ABC 80-4270

Type Classification:

STD CCTC 2699.

Use:

The ABC-M4 file destroyer is used primarily to destroy classified material in filing cabinets. It is intended for use outside CONUS. It is designed to effect maximum destruction of classified material with minimum damage to the premises where the filing cabinets are kept. One ABC-M4 file destroyer provides sufficient material to completely destroy the contents of a normal four-drawer file cabinet. Combustible material other than files can be destroyed with this incendiary if the installation procedures are varied to suit the circumstances. The ABC-M4 file destroyer is requisitioned and issued in accordance with SB 725-1300-1.

Description:

The ABC-M4 incendiary file destroyer consists of 44 oxidizer boxes, 4 igniter boxes and 4 racks. The oxidizer boxes furnish oxygen to permit papers to be burned in a closed file drawer. The igniter boxes set fire to the papers and oxidizer boxes. The racks compress the papers and oxidizer boxes while the papers are burning. Forty-four pounds of paper can be destroyed with this incendiary.

a. Oxidizer Boxes. The oxidizer boxes are made of cellulose nitrate. They measure 10-1/2 inches long by 8-1/4 inches wide by 1/2-inch deep and are filled with approximately 26-1/2 ounces of sodium nitrate.

b. Igniter Boxes. The igniter boxes are also made of cellulose nitrate, the same size



as the oxidizer boxes, and are filled with approximately 12 ounces of a mixture of sodium nitrate and finely powdered wood (wood flour). Each igniter box contains two squibs connected in parallel to a pair of igniter wires that are used to connect the squibs to a power source.

c. Racks. The racks are flexible mats made of interlocking links of heavy wire formed into a rectangle measuring 12 inches by 29 inches and weighing 6-1/2 pounds. The flexible construction of the racks allows them to follow the contours of the tops of the papers in a file drawer and to keep the papers compressed while they are burning.

#### Functioning:

a. One oxidizer box is installed in the front of each file drawer and one behind each 1/2-inch thickness of paper in the drawer until all papers in the drawer are sandwiched between oxidizer boxes.

b. An igniter box is placed ahead of the first oxidizer box in each file drawer.

c. The squib wires from each drawer are brought out of the drawer such that they will not be cut or broken when the drawer is closed. The wires are brought together so they may be easily connected to the firing line.

d. A rack is placed on top of the papers and boxes in each drawer so that it will remain in contact with the contents of the file as burning progresses.

e. The drawers are closed.

f. The squib wires are connected in parallel to a firing lead.

g. A blasting machine or other source of electricity is used to fire the squibs which set fire to the wood-flour-and-sodium nitrate mixture. The sodium nitrate furnishes oxygen to support combustion in the closed file. Papers adjacent to the igniter box ignite and the sodium nitrate in the next oxidizer box furnishes the necessary oxygen for combustion. Combustion progresses in this way until the entire contents of the drawer are burning.

The weight of the rack keeps the contents of the file compressed, thereby providing maximum contact between the paper and the sodium nitrate and maximum effectiveness of the incendiary. A file destroyed by an ABC-M4 incendiary emits large volumes of acrid black smoke while burning.

#### Tabulated Data:

|                     |                                               |
|---------------------|-----------------------------------------------|
| Container material  | -----Cellulose Nitrate                        |
| Color               | -----Clear                                    |
| Weight:             |                                               |
| Igniter box         | -----1 lb (.45 kg)                            |
| Oxidizer box        | -----2 lb (.9 kg)                             |
| Dimensions          | -----10-1/2 x 8-1/4 x 1/2 in.                 |
| Filler:             |                                               |
| Igniter box         | -----12 oz sodium nitrate and wood flour      |
| Oxidizer box        | -----26-1/2 oz sodium nitrate                 |
| Method of actuation | -----Electricity (one ampere per igniter box) |

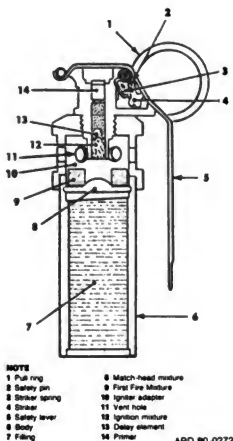


#### Shipping and Storage Data:

|                             |                                                                   |
|-----------------------------|-------------------------------------------------------------------|
| Quantity-distance class     | -----1.3                                                          |
| Storage compatibility group | -----G                                                            |
| DOT shipping classification | -----Class B explosives                                           |
| DOT designation             | -----SPECIAL FIREWORKS—HANDLE CAREFULLY—KEEP FIRE AWAY            |
| DODIC                       | -----M610                                                         |
| Drawing                     | -----D4-11-103                                                    |
| Packaging                   | -----4 igniter boxes, 4 oxidizer boxes and 4 racks per wooden box |
| Packing box:                |                                                                   |
| Weight (w/contents)         | -----117 lb                                                       |
| Dimensions                  | -----As required                                                  |
| Cube                        | -----3.5 cu ft                                                    |
| Specification               | -----MIL-F-13549                                                  |

#### References:

SB 55-730-10  
TM 3-250  
SB 725-1300-1  
TB CML-110

## DOCUMENT DESTROYER, EMERGENCY, INCENDIARY: M3

**Type Classification:**

OBS MSR 04766021.

**Use:**

The M3 incendiary emergency document destroyer is used to accomplish the rapid destruction of a maximum of 70 pounds of paper or cardboard by burning. The paper may be bound in folders, or it may consist of loose sheets. The M3 incendiary emergency document destroyer is designed primarily for the destruction of paper and paper products; however, other combustible materials, such as photographic film or cryptographic devices made of plastic and magnesium or aluminum, can be destroyed.

**Description:**

The M3 incendiary emergency document destroyer consists of five packages of sodium nitrate (1),

an igniter charge (8), a screen (6), a retaining band assembly (7), two M25 igniters (10), and a box of safety matches (9) of the drum in which the incendiary is packed. Descriptions of the components follow.

a. **Sodium Nitrate.** The sodium nitrate is packaged in five plastic-lined paper sacks containing 19 pounds each. The sodium nitrate furnishes oxygen to support combustion. Each package is labeled for identification.

b. **Igniter Charge.** The igniter charge consists of a mixture of 2 pounds of sodium nitrate, 2 pounds of sugar, and 4 ounces of charcoal in a plastic-lined paper sack. This mixture ignites readily and burns with a hot flame. The package is labeled for identification.

c. Screen. The screen is a 2-foot square of 2 mesh 1/16-inch galvanized steel wire cloth. Two square or circular 2-1/2-inch holes, spaced 8 inches apart, are located near the center of the screen. Four securing wires, 12 inches long, are attached to the corners of the screen.

d. Retaining Band Assembly. The retaining band assembly consists of a steel retaining band 3/4-inch wide and 78 inches long, with a D-ring at one end. Four additional D-rings are fastened at right angles to the retaining band by steel strapping.

e. M25 Igniter. The M25 igniter consists of a cellulose nitrate body 1-5/16 inches in diameter and 3-1/8 inches long, filled with thickened kerosene (7) and fitted with an ignitor adapter (10) made of cellulose nitrate. An M201A1 grenade igniting fuze (TM 3-300) is screwed into the top of the igniter adapter, and a first-fire mixture (9) and a match-head mixture (8) are located under the igniter adapter. Vent holes (11) in the side of the igniter adapter are covered by moistureproof tape. The nomenclature of the igniter is marked on the body.

f. Safety Matches. A box of wood safety matches is packed with the document destroyer for use when the M25 igniter is not used. Any field expedient can be used to ignite the igniter charge.

g. Additional Equipment. The user must obtain an empty 55-gallon metal drum for use with the document destroyer. The drum is used as an incinerator in which the material is burned. A metal cover with a 6-inch-to-8-inch diameter hole must be provided for the 55-gallon drum to maintain sufficient pressure inside the drum to insure complete combustion. The drum and cover must be obtained in advance and kept available for emergency use in the same location as the document destroyer.

#### Functioning:

The device must be properly prepared for functioning by (a) emptying one bag of sodium nitrate into the bottom of the incinerator drum, (b) sandwiching the material to be destroyed between layers of sodium nitrate (c) placing the igniter charge over the top layer of sodium nitrate along with several loose sheets of paper (d) emplacing the perforated drum lid and (e) securing the screen atop the drum lid. Actual functioning of the destroyer is accomplished by (a) normal actuation of the M25 igniter whose functioning sequence is: (1) the tape is removed from the

igniter adapter (2) the safety pin is pulled (3) the safety lever is released (as the igniter is dropped into the incinerator drum) which (4) allows the striker to hit the primer which (5) ignites a delay element with a 1.2- to 2-second delay time. (6) Upon expiration of the delay time, the delay element ignites the ignition mixture (7) and the first-fire mixture (8) which in turn ignites the match-head mixture (9) and (10) the filling of the igniter.

Flame from the burning igniter lights the ignition charge which ignites the paper. The sodium nitrate furnishes oxygen for combustion. The paper in the drum is completely consumed in approximately 20 minutes.

When the incendiary is shipped without igniters, the safety matches are used for ignition. In this case, light a piece of paper and drop it through the hole in the screen and into the drum. The burning paper will ignite the ignition charge.

#### Limitations:

When materials containing metal are to be destroyed with the emergency document destroyer, utmost care must be exercised in preparing the materials for destruction. The amount of material containing metal must not be greater than 10 pounds and must be combined with 60 pounds of paper for a total charge of 70 pounds. Five pounds of the metal should be mixed in each of the second and third layer of paper to assure destruction. The combined weight of paper and other material must not exceed 70 pounds, or the material may not be completely destroyed. Paper with high clay content (coated paper stock similar to that used in some magazines) will not burn completely, and the ash of this type of paper often retains legible printing. The ash should be destroyed by vigorous stirring of the residue.

#### Tabulated Data:

|                           |                                      |
|---------------------------|--------------------------------------|
| Container material-----   | Fiberboard with steel top and bottom |
| Color-----                | Gray with purple strip               |
| Weight-----               | 117 lb                               |
| Dimensions:               |                                      |
| Night-----                | 19-3/4 in.                           |
| Diameter-----             | 15-1/3 in.                           |
| Cube-----                 | 2.8 cu ft                            |
| Explosive components----- | Sodium, nitrate, igniter mixes       |
| Method of actuation-----  | Manual                               |

Shipping and Storage Data:

Quantity-distance class-----1.3  
 Storage compatibility group ---G  
 DOT shipping classification---Class B Explosive  
 DOT designation-----SPECIAL FIREWORKS---  
                                     HANDLE CAREFULLY---  
                                     KEEP FIRE AWAY  
 DODIC-----M605 (M25 igniter  
                                     carries DODIC  
                                     M615 for sepa-  
                                     rate issue)  
 NSN:  
     W/igniters-----1375-00-529-8004  
     W/o igniters-----1375-00-542-0090  
     Igniter M25-----1375-00-602-2213  
 Drawing-----C4-11-11  
 Specification-----MIL-D-14360  
 Packaging-----C4-11-11 and  
                                     C4-11-12

Packing box:

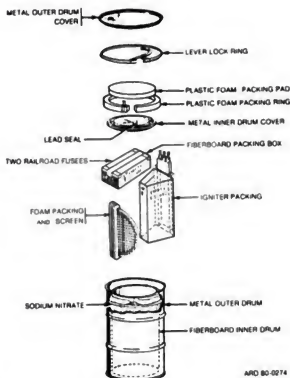
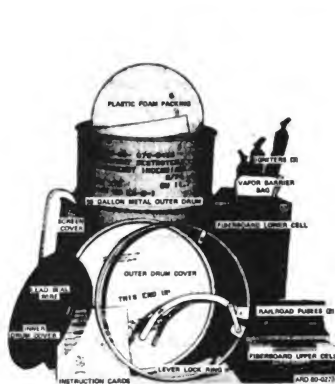
Weight (w/contents)-----117 lb  
 Dimensions-----19-3/4 high x  
                                     15-1/2 in.  
                                     dia  
 Cube-----2.8 cu ft

Reference:

TB 3-300-1

THIS PAGE INTENTIONALLY LEFT BLANK

## DOCUMENT DESTROYER, EMERGENCY, INCENDIARY: M4



AFD 80-0274

Type Classification:

MSR 04766021.

Use:

Document Destroyer, Emergency Incendiary, M4 is used for the rapid destruction of up to 120 pounds of paper (paper products), photographic film, recording tape, magnesium or aluminum reels, and cryptographic devices (printed circuit boards) made of plastic.

Description:

The M4 Document Destroyer is a self-contained incendiary kit. It consists of a 55 gallon steel drum containing a centrally positioned fiberboard inner drum which forms a 2-inch wide annulus for approximately 190 pounds of prilled sodium nitrate oxidizer. The steel drum is fitted with a full drum cover and lever locking ring. Packed inside the fiberboard drum are a folded wire screen cover, three igniters and two 20 minute railroad fuses. Details on each of the components are given below.

a. **55-Gallon Metal Outer Drum.** The 55-gallon metal outer drum, with removable cover, is used as an incinerator into which up to 120 pounds of documents can be burned. The drum also serves as the shipping and storage container. The drum is shipped with a drum cover/gasket and lever lock ring secured in place with a wire lead seal. Operating instructions are attached to the underside of drum cover.

(1) **Outer drum cover.** The outer drum cover is of one piece formed steel with an outer lip. When installed on the metal outer drum, it fits over the bead of the open end of the steel drum body. When the lever lock ring is installed, the drum is sealed.

(2) **Lever lock ring.** The lever lock ring is a half-round metal ring, which fits over the outer lip of the cover, and is equipped with a lever that draws or loosens the ring. The lever rests in a catch to hold it closed.

(3) Gasket. The gasket is a round, synthetic rubber ring approximately 23-1/2 inches in diameter. The gasket is cemented to the outer drum cover.

b. Screen Cover. The screen cover consists of a disk of a 2-mesh 1/16-inch stainless steel wire cloth welded to a steel cover band. The screen cover is folded so that it fits inside the fiberboard inner drum.

c. Fiberboard Inner Drum. The fiberboard inner drum is a cylindrical packing drum with a metal drum cover. The six plastic foam spacers position the fiberboard inner drum inside the metal outer drum. The metal inner drum cover is provided to close the fiberboard inner drum.

d. Oxidizing Agent. The oxidizing agent is either sodium nitrate coated with calcium phosphate or prilled sodium nitrate. The oxidizing agent fills the space between the fiberboard inner drum and the metal outer drum. It provides the oxidizer required to support combustion of the documents being destroyed.

e. Igniters. The igniter is contained in a black plastic bag. The igniter consists of a mixture of sodium nitrate, sugar, and charcoal. The sugar and charcoal provide the fuel and the sodium nitrate provides oxygen. Three igniters approximately 3 inches diameter by 22 inches long are packed in a vapor barrier bag. The vapor barrier bag is packed in fiberboard box which is attached to the lower cell.

f. Railroad Fuses. Two railroad warning fuses are provided in each document destroyer. They are packaged in the fiberboard upper cell. The fuses have been modified by the addition of a hook which allows them to be hung on the edge of the inner drum after they are unpacked.

g. Instruction cards. Two instruction cards, one for preparation of the document destroyer and one for operation of it, are contained in a plastic envelope under the outer drum cover. In addition, a second instruction card for operation of the document destroyer is cemented to the underside of the outer drum cover.

h. Miscellaneous Packing Material. Miscellaneous packing materials such as corrugated fiberboard are used to fill the void spaces and to retain the parts in place during shipping and storage of the document destroyer.

#### Functioning:

The destroyer is usually prepared well in advance so it can be used on very short notice.

Preparation consists mainly of unpacking the screen, fuses, and igniters, and discarding all of the inner packing materials from the drum. The components are positioned within the drum and the drum is sealed if immediate use is anticipated. The screen is secured to the drum lid for quick access. When the destroyer is to be used, the lid is removed, the fuses are removed, the material to be destroyed is placed in the inner drum and the screen is secured to the top of the drum. Actual functioning of the destroyer is effected by lighting one of the fuses and using it to light one of the igniters. The first igniter lights the others and the three of them ignite the paper and sodium nitrate which are the fuel and oxidizer needed to sustain combustion of the entire contents of the drum.

#### Tabulated Data:

|                          |                                                                  |
|--------------------------|------------------------------------------------------------------|
| Container material-----  | Steel                                                            |
| Color-----               | Light gray/black markings                                        |
| Weight-----              | 275 lb (124.7 kg)                                                |
| Dimensions:              |                                                                  |
| Height-----              | 35-9/16 in. (90.33 cm)                                           |
| Diameter-----            | 23-3/4 in. (60.3 cm)                                             |
| Cube-----                | 11.7 cu ft                                                       |
| Active components:       |                                                                  |
| Oxidizer-----            | 190 lb (86.2 kg)<br>prilled sodium nitrate                       |
| Igniters (3 ea)-----     | 2-1/2 lb (1.1 kg)<br>powdered sodium nitrate, sugar and charcoal |
| Fuses (2 ea)-----        | See fusee, railroad:<br>M72 in TM 43-0001-37                     |
| Method of actuation----- | Hand striking of fusee                                           |

#### Shipping and Storage Data:

|                                  |                                                   |
|----------------------------------|---------------------------------------------------|
| Quantity-distance class-----     | 1.3                                               |
| Storage compatibility group----- | G                                                 |
| DOT shipping classification----- | Class B explosive                                 |
| DOT designation-----             | SPECIAL FIREWORKS—HANDLE CAREFULLY—KEEP FIRE AWAY |
| DODIC-----                       | M814                                              |
| NSN-----                         | 1375-00-078-0450                                  |
| Drawing-----                     | D4-11-47                                          |
| Packaging-----                   | D4-11-47 (item is self-packed)                    |

#### Summary Destruction Capability:

Maximum destruction-----120 lb (54.4 kg)

Limitations on materials to be  
destroyed (max % allowable  
for assured destruction):

|                                                              |                                                   |
|--------------------------------------------------------------|---------------------------------------------------|
| Cellulose papers (docu-<br>ments)-----                       | 65 to 100% (21<br>to 32 in.) (53.3<br>to 81.3 cm) |
| Glossy paper-----                                            | 5% (1-1/2 in.)<br>(2.5 to 3.8 cm)                 |
| Plastics (printed circuit<br>boards)-----                    | 0.20% (6-1/2 in.)<br>(16.5 cm)                    |
| Film and tape on metal<br>reels or nonmetallic<br>reels----- | 15% (5 in.) (12.<br>7 cm)                         |

References:

TM 3-1375-201-10  
TM 9-1300-200  
TM 9-1300-206  
TM 9-1370-203-12  
TM 38-250  
TM 38-750  
TM 43-0139  
SB 74-2-1375-94-8  
SC 1340-98 IL



THIS PAGE INTENTIONALLY LEFT BLANK

By Order of the Secretary of the Army:

E.C. MEYER  
General, United States Army  
Chief of Staff

Official:  
J.C. PENNINGTON  
Major General, United States Army  
The Adjutant General

Distribution:  
To be distributed in accordance with DA Form 12-40, Organizational  
Maintenance requirements for Demolition Materials.

U.S. GOVERNMENT PRINTING OFFICE: 1989 242-451/01602

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM. CAREFULLY TEAR IT  
OUT. FOLD IT AND DROP IT  
IN THE MAIL!

**SOMETHING WRONG** WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 43-0001-38

PUBLICATION DATE

25 June 1981

PUBLICATION TITLE  
Army Ammunition Data Sheets For  
DEMOLITION MATERIALS

BE EXACT. PIN-POINT WHERE IT IS

PAGE  
NO

PARA-  
GRAPH

FIGURE  
NO

TABLE  
NO

IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 2028-2  
1 JUL 79

PREVIOUS EDITIONS  
ARE OBSOLETE.

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR  
RECOMMENDATION MAKE A CARBON COPY OF THIS  
AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD 314



Commander  
US Army Armament Materiel Readiness Command  
ATTN: DRSAR-MAS-MA  
Dover, NJ 07801

THIS ADDRESS PERMANENTLY LASTS

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM. CAREFULLY TEAR IT  
OUT. FOLD IT AND DROP IT  
IN THE MAIL!

**SOMETHING WRONG** WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 43-0001-38

PUBLICATION DATE

25 June 1981

PUBLICATION TITLE

Army Ammunition Data Sheets For  
DEMOLITION MATERIALS

BE EXACT. PIN-POINT WHERE IT IS

PAGE  
NO.

PARA-  
GRAPH

FIGURE  
NO.

TABLE  
NO.

IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG PERFORATED LINE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 2028-2  
JUL 79

PREVIOUS EDITIONS  
ARE OBSOLETE.

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR  
RECOMMENDATION MAKE A CARBON COPY OF THIS  
AND GIVE IT TO YOUR HEADQUARTERS

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD 314



Commander  
US Army Armament Materiel Readiness Command  
ATTN: DRSAR-MAS-MA  
Dover, NY 07801

THIS ADDRESS PERMANENTLY PRINTED

**SOMETHING WRONG WITH THIS PUBLICATION?**

DATE SENT \_\_\_\_\_

PUBLICATION TITLE  
Army Ammunition Data Sheets For  
DEMOLITION MATERIALS

**IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:**

TABLE NO.

SIGN HERE \_\_\_\_\_

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

